Move Focus

⌘J

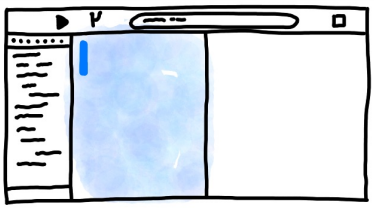

⌘ J

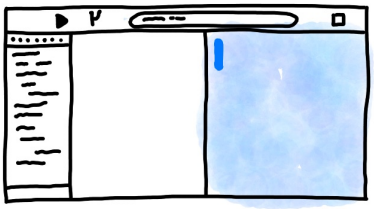

→

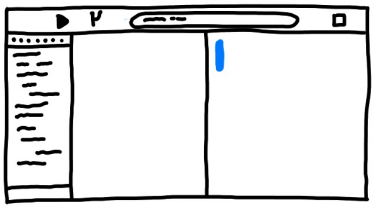

↵

Move Line Up/Down

```
Image("turtlerock")
    .clipShape(Circle())
    .shadow(radius: 7)
```

```
Image("turtlerock")
    .shadow(radius: 7)
    .clipShape(Circle())
```

⌥ ⌘ [

```
Image("turtlerock")
    .shadow(radius: 7)
    .clipShape(Circle())
```

```
Image("turtlerock")
    .clipShape(Circle())
    .shadow(radius: 7)
```

⌥ ⌘]

Run / Stop

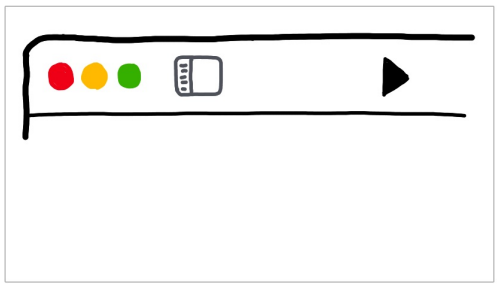

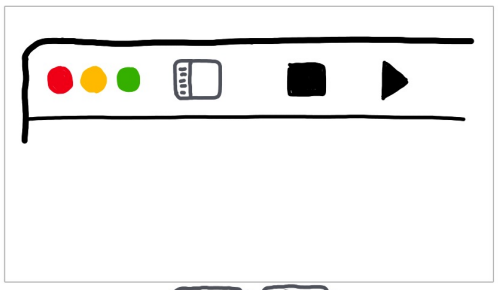



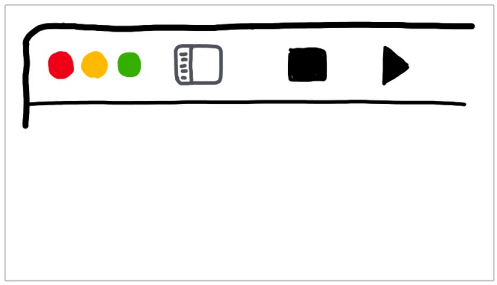

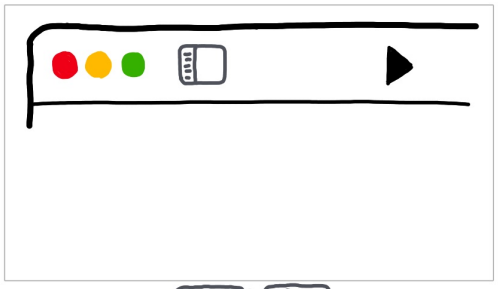



Choose Scheme

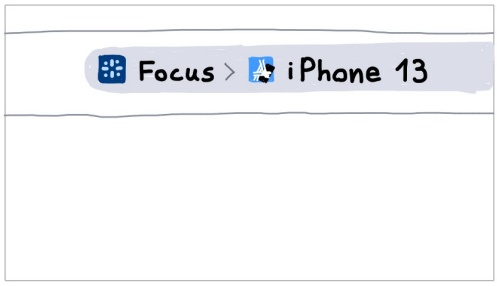

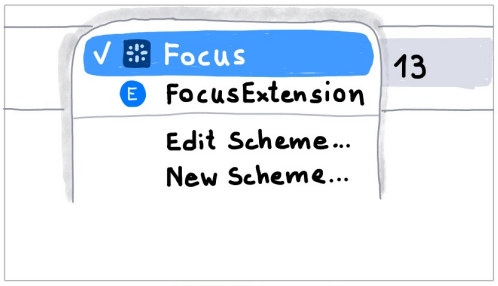

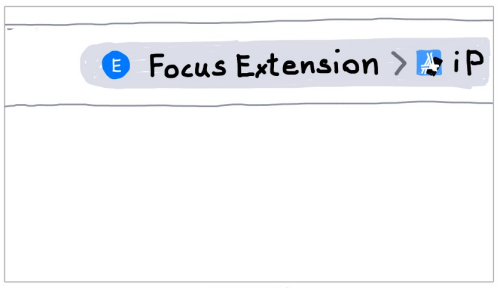

Editor History

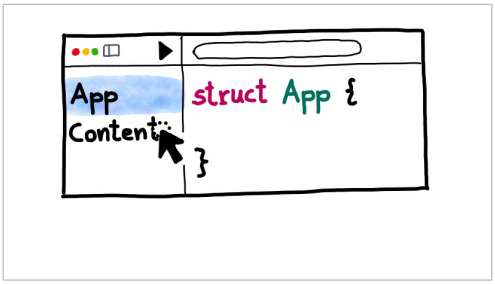

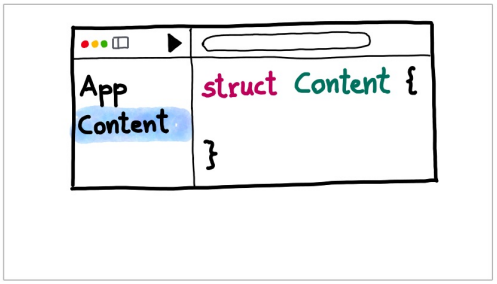

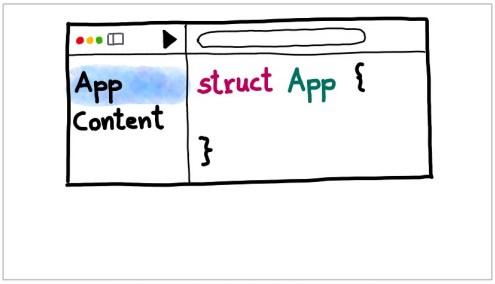

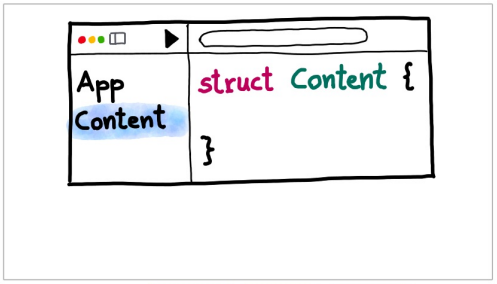

Navigators

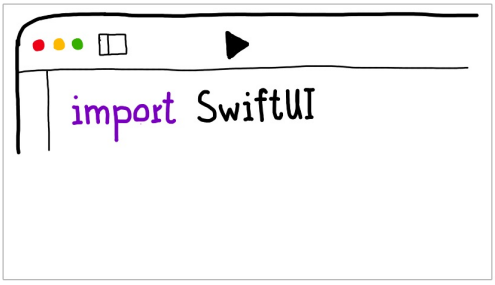

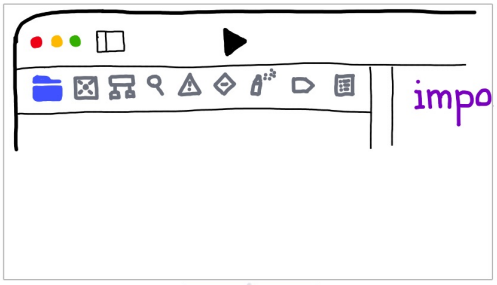

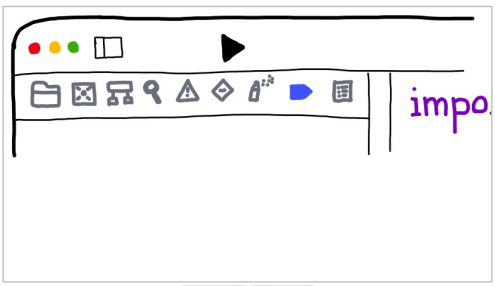

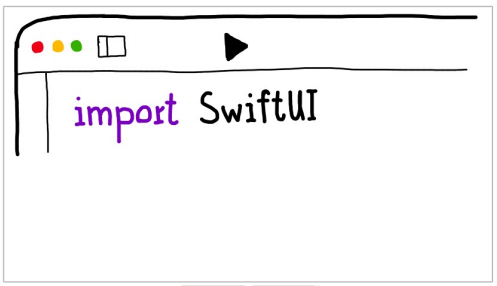

View Debugger

@dasdom

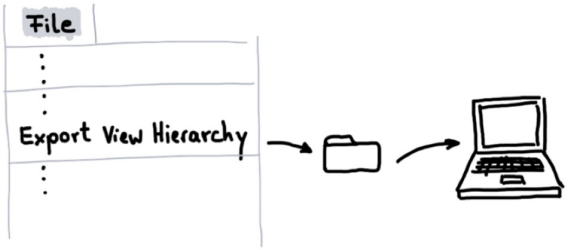

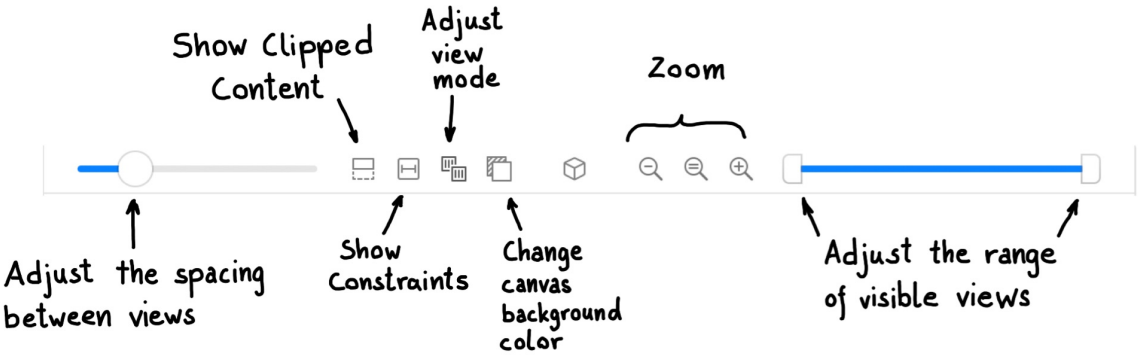

7

Show Document Items

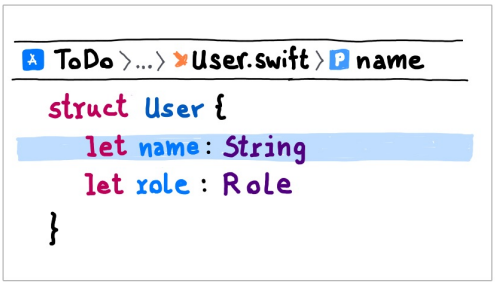

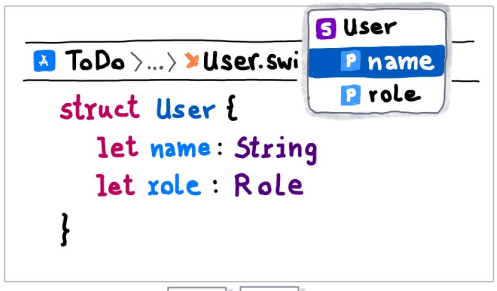

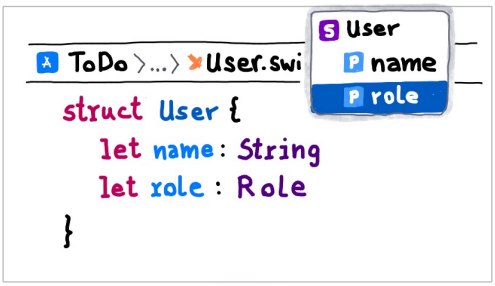

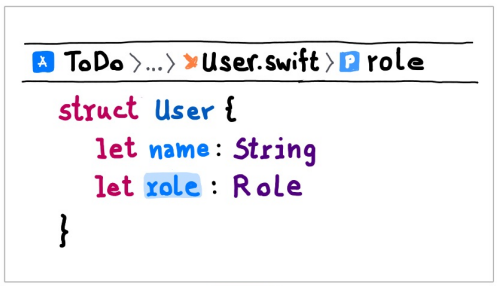

xcode.tips

8

Vim Mode: Start New Line

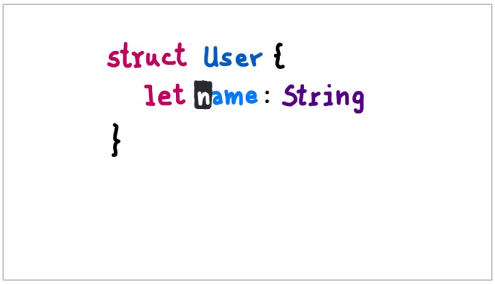

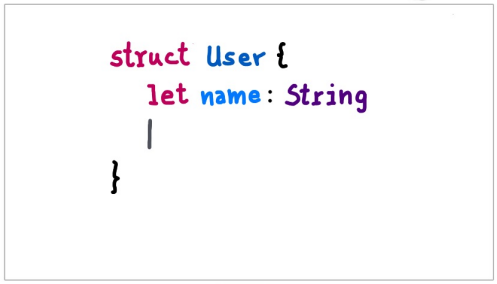

O

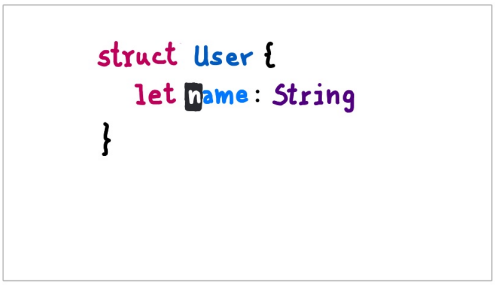

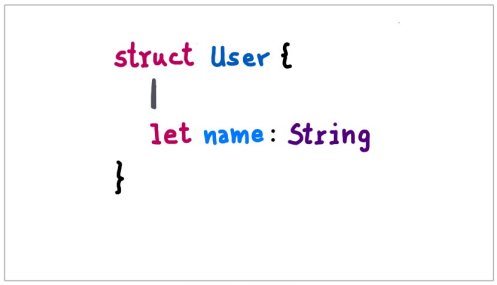

⇧ O

Find Next/Previous

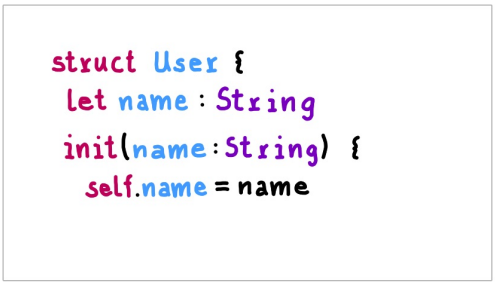

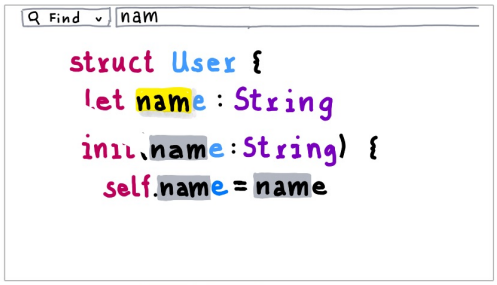

⌘ F "nam"

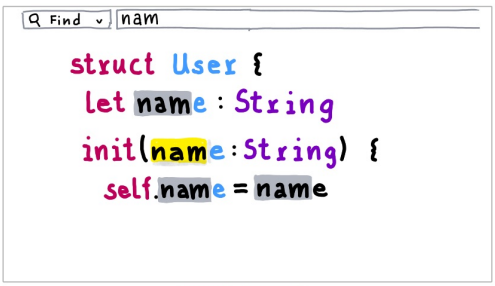

⌘ G

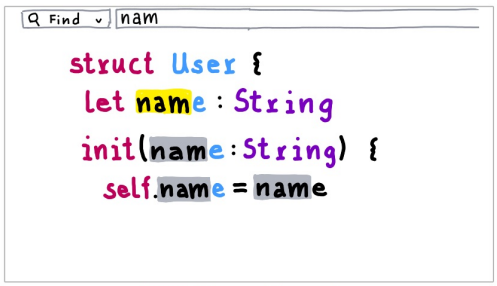

⌘ ⇧ G

Show/Hide Debug Area

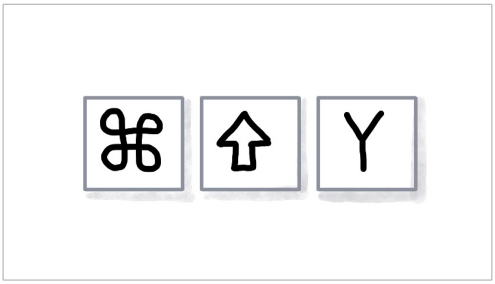

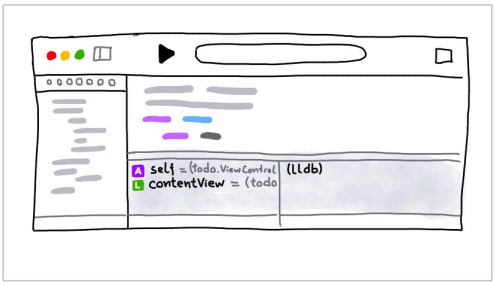

xcode.tips

11

Multi Cursor I

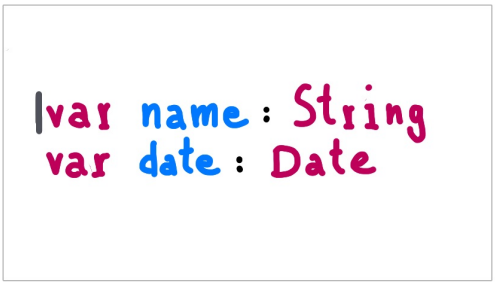

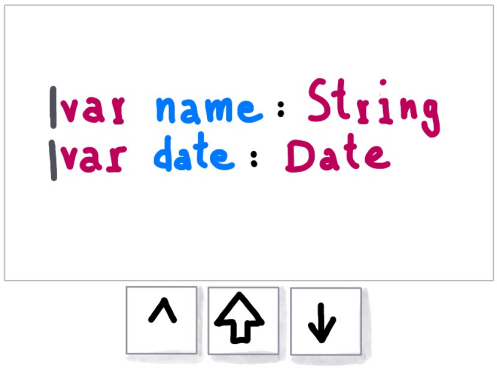

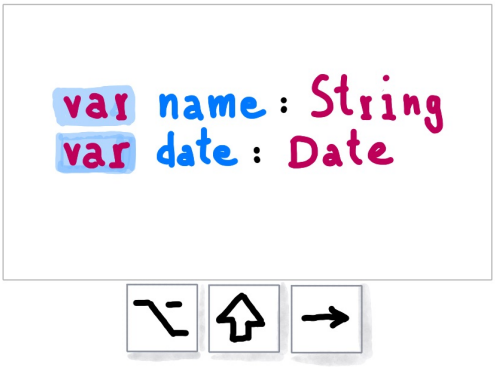

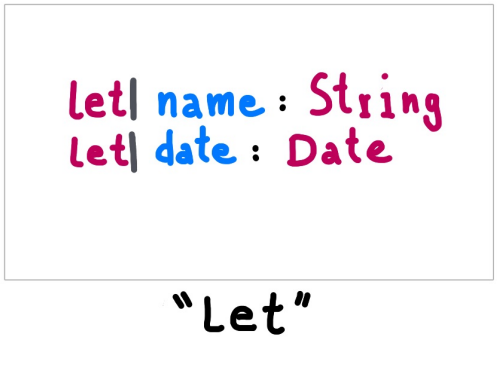

xcode.tips

12

Multi Cursor II

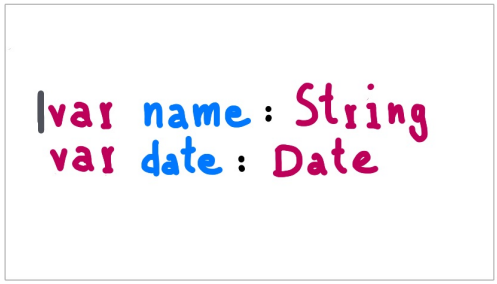

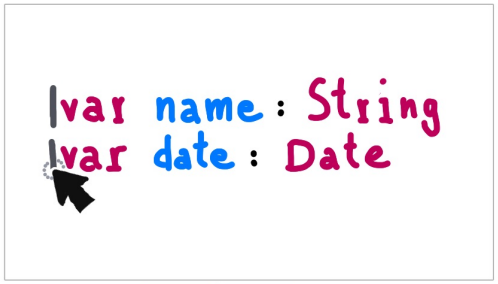

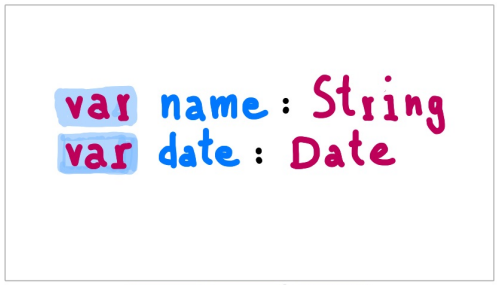



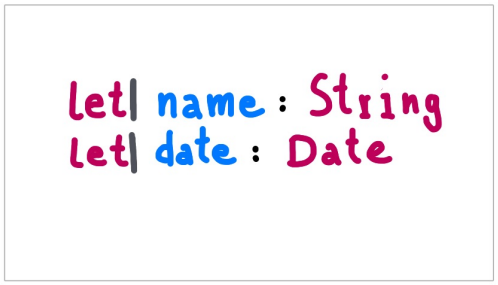

"Let"

IB : Distance

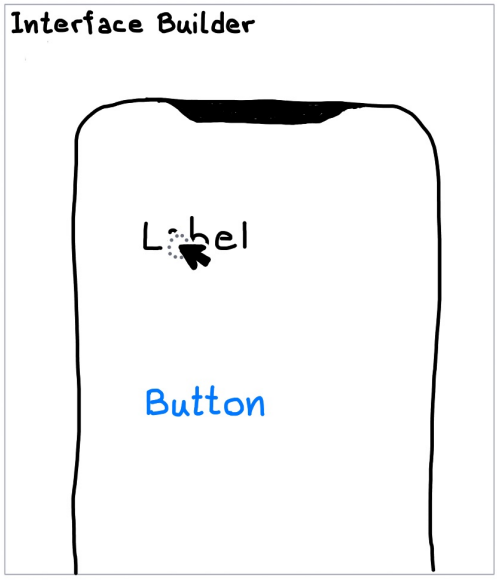

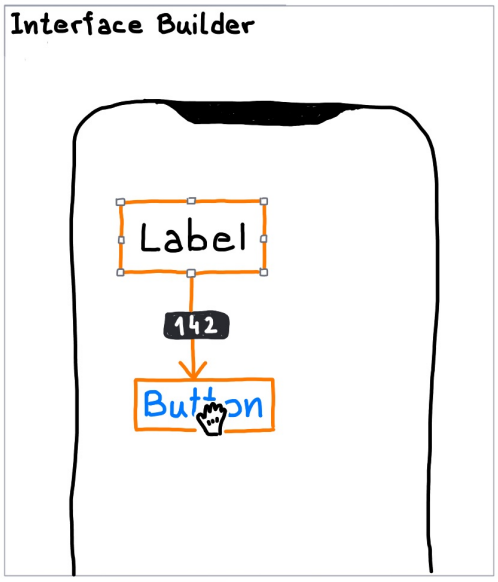

hover

IB: Views Under Cursor

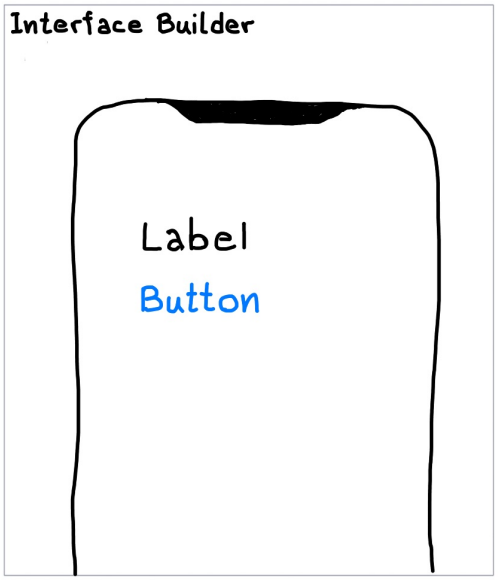

xcode.tips

Open Quickly

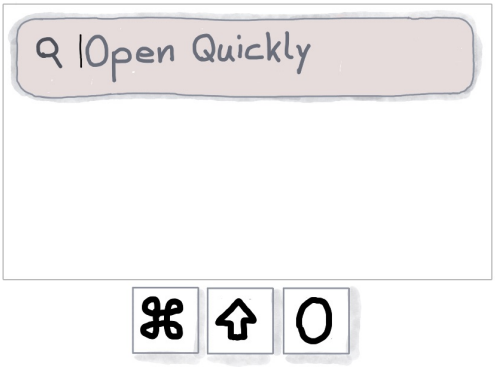

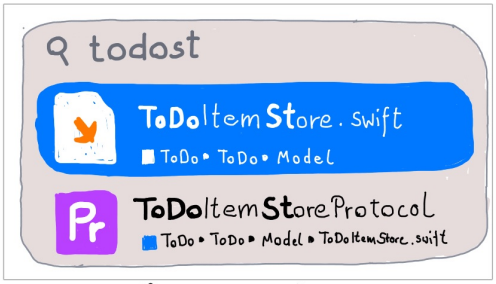

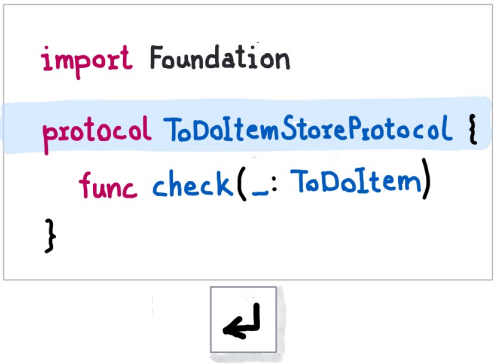

xcode.tips

Show View Frames

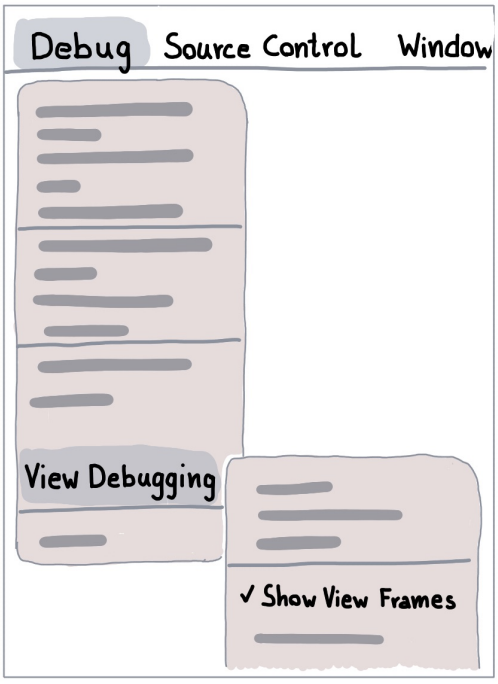

Xcode

Simulator

Increase / Decrease Font Size

```
struct Event {
  let title : String
  let date : Date
}
```

```
struct Event {
  let title : String
  let date : Date
}
```

⌘ +

```
struct Event {
  let title : String
  let date : Date
}
```

⌘ − −

```
struct Event {
  let title : String
  let date : Date
}
```

^ ⌘ 0

Multi Cursor III

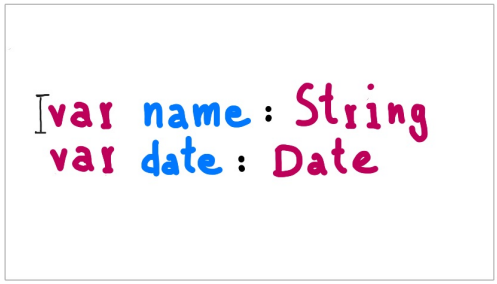

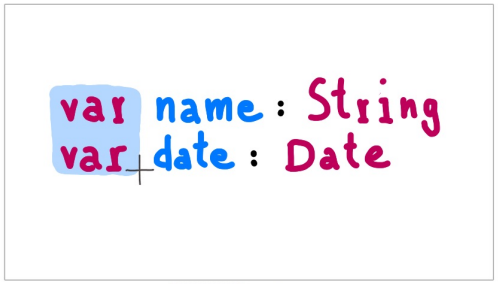

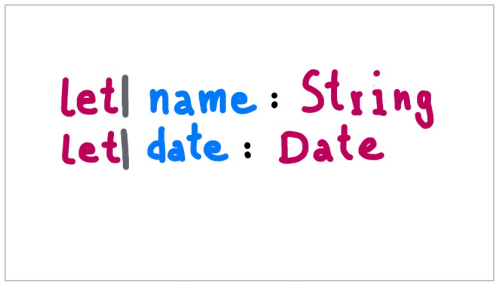

"Let"

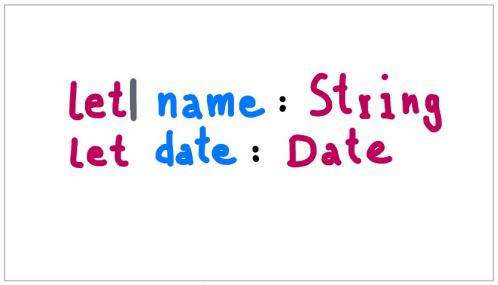

xcode.tips

19

JumpBar : Fuzzy Search

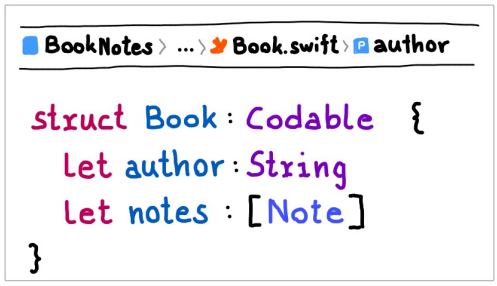

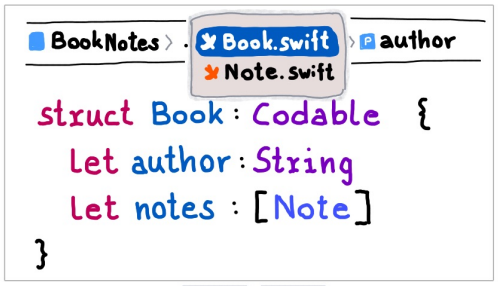

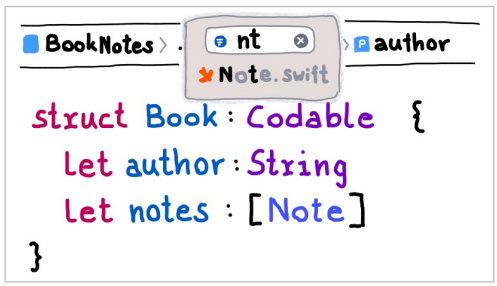

"nt"

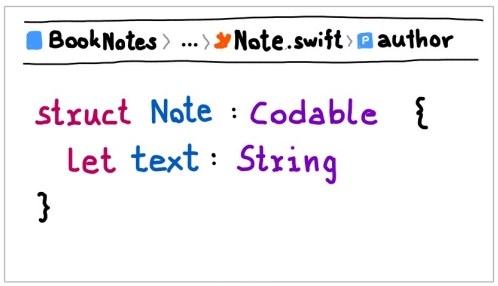

xcode.tips

20

Add/Remove Breakpoint

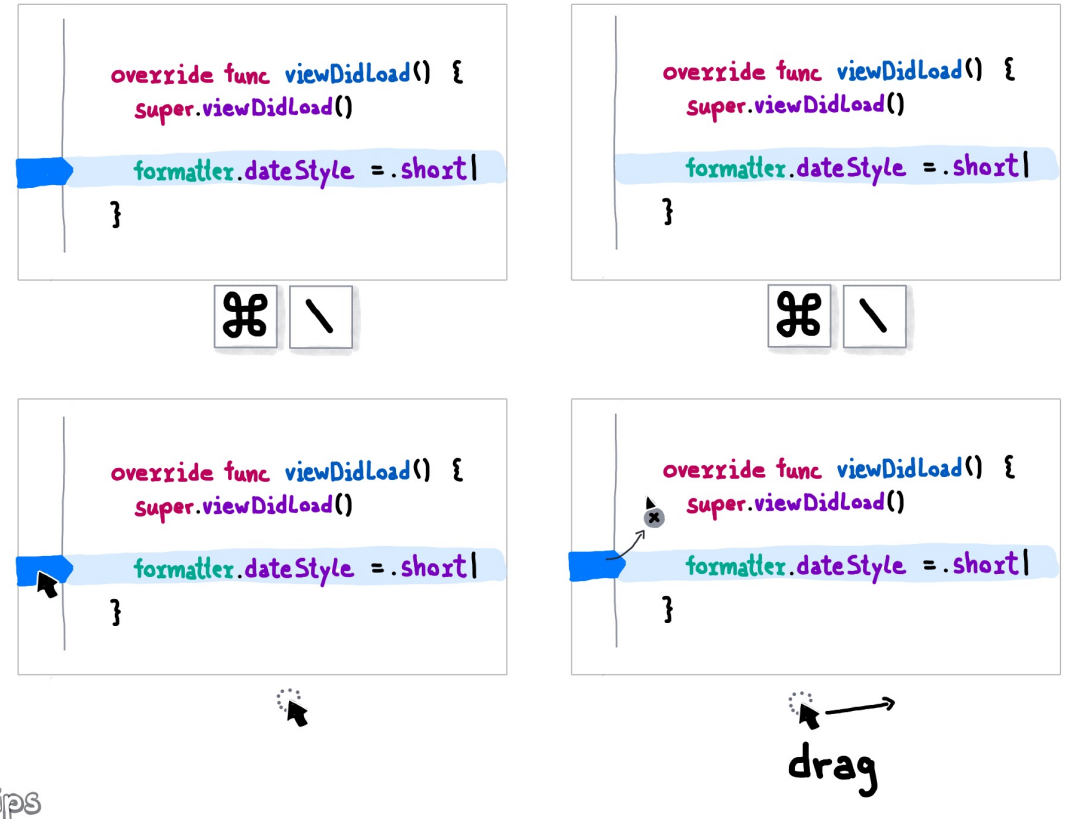

xcode.tips

21

IB: Appearance Preview

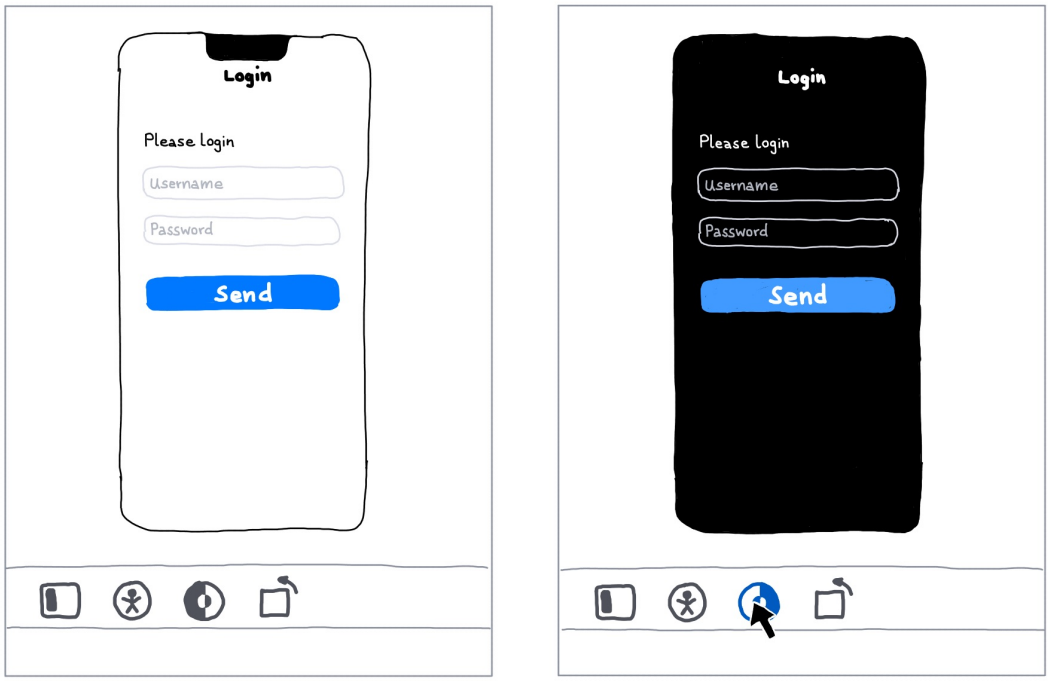

xcode.tips

22

Re-Indent

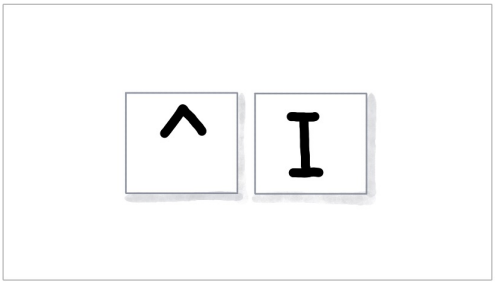


```
struct User {
  let name: String
    let birthday: Date
let role: Role
}
```

```
struct User {
  let name: String
  let birthday: Date
  let role: Role
}
```

xcode.tips

23

Print Current ViewController

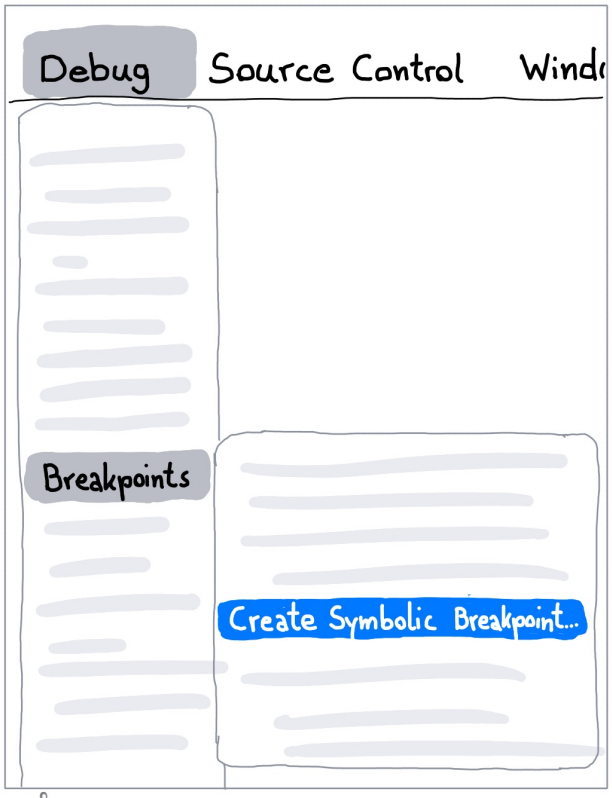

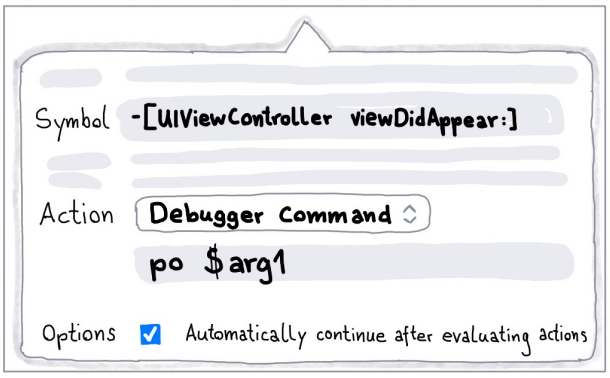

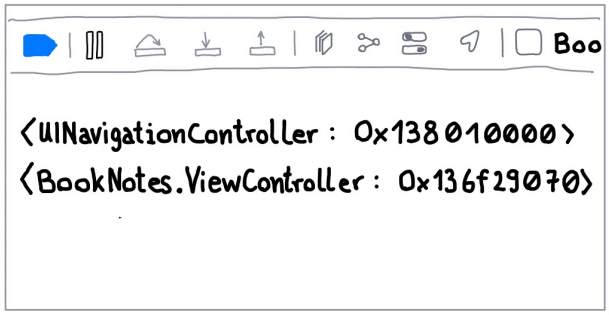

Debug Console

xcode.tips

24

Move Breakpoint To User

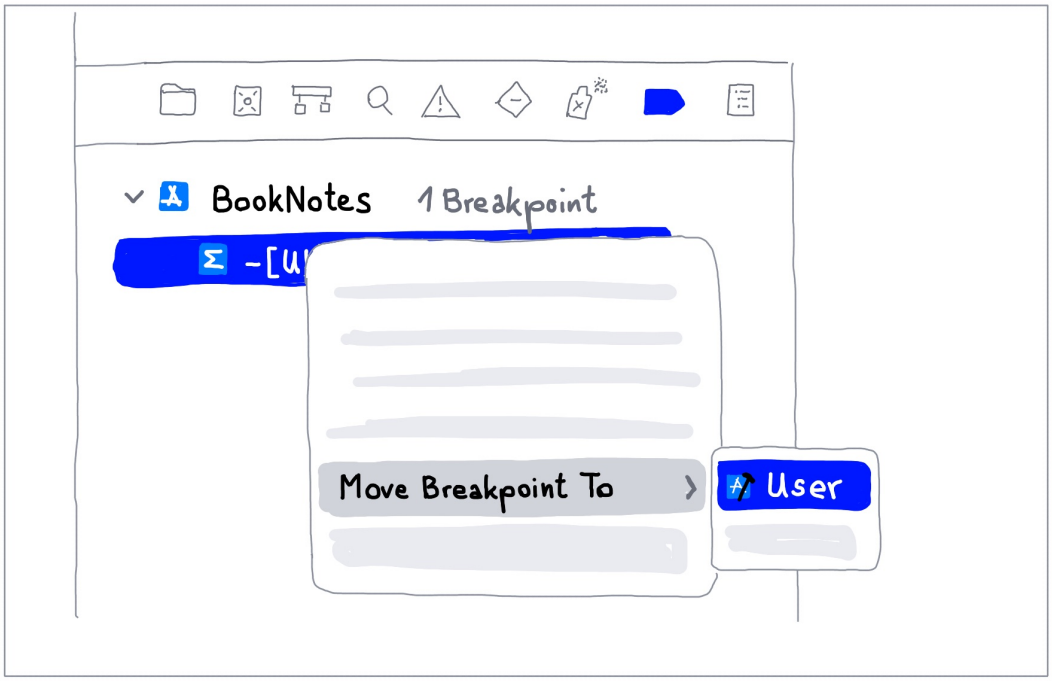

xcode.tips

25

Reveal In Project Navigator

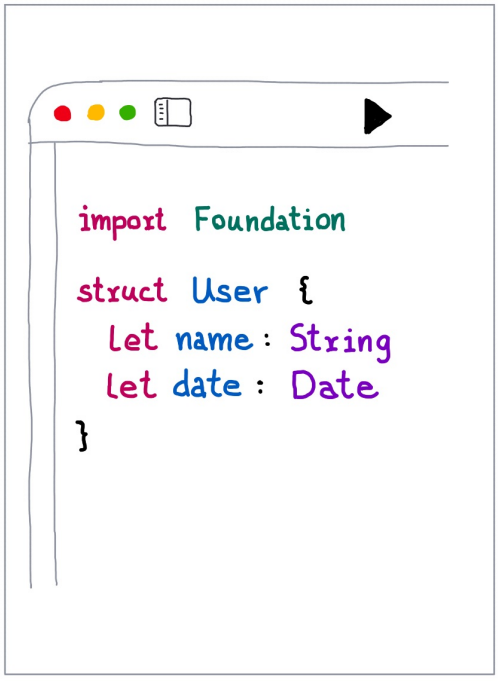

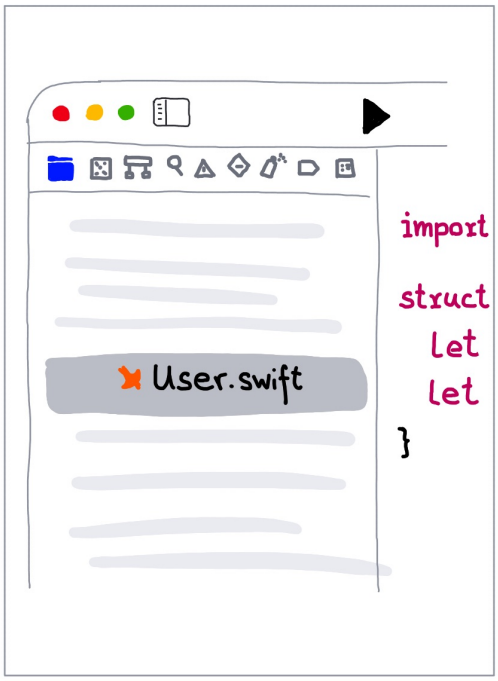

xcode.tips

26

Open In New Editor

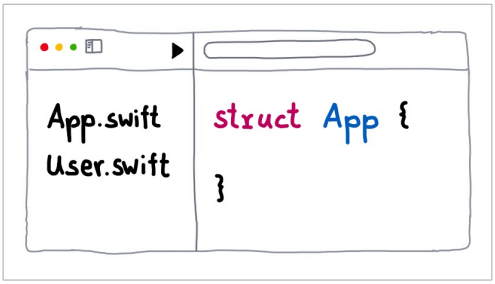

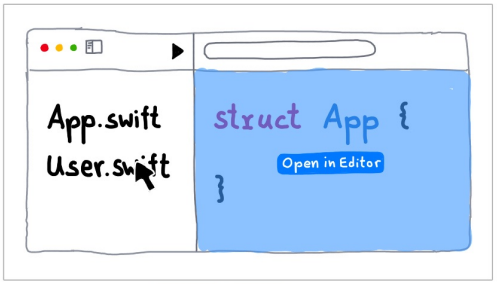



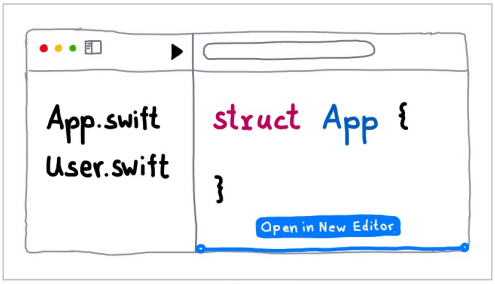

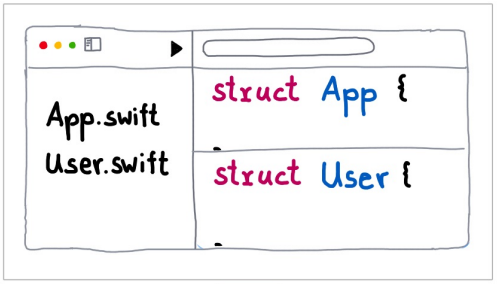

27

Edit All In Scope

```
func count(section Section) -> Int {
  let num: Int
  switch section {
    case .user: num = 4
    case .legal: num = 3
  }
  return num
}
```

```
func count(section Section) -> Int {
  let num: Int
  switch section {
    case .user: num = 4
    case .legal: num = 3
  }
  return num
}
```

```
func count(section Section) -> Int {
  let num: Int
  switch section {
    case .user: num = 4
    case .legal: num = 3
  }
  return num
}
```

```
func count(section Section) -> Int {
  let count: Int
  switch section {
    case .user: count = 4
    case .legal: count = 3
  }
  return count
}
```

"count"

xcode.tips

28

New Editor

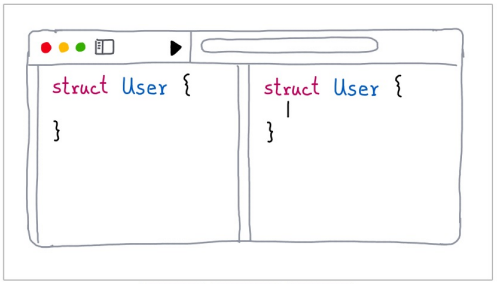

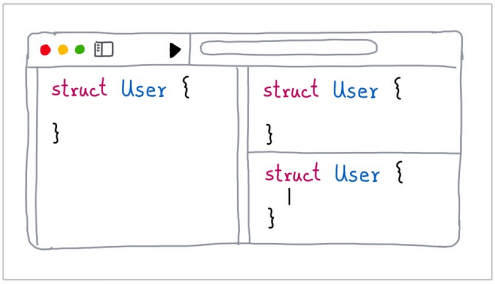

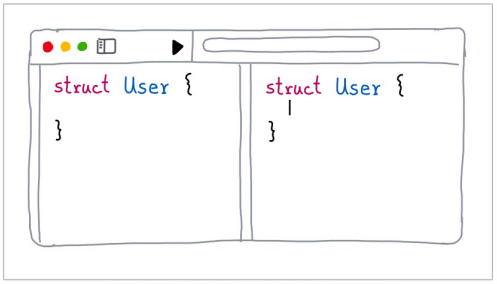

xcode.tips

29

Search Documentation For Selected Text

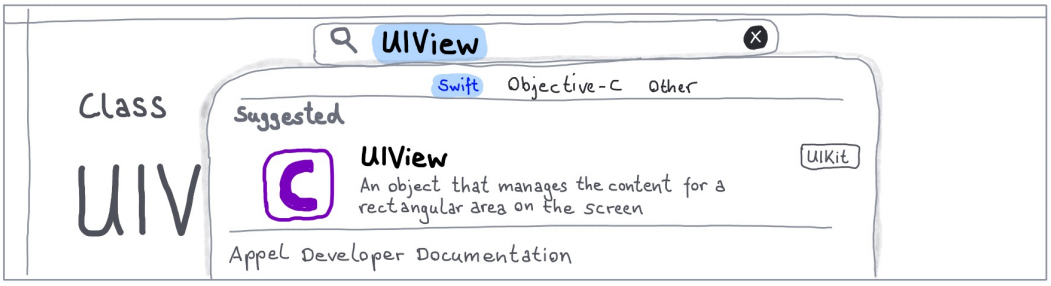



xcode.tips

30

Jump To Next/Previous Change

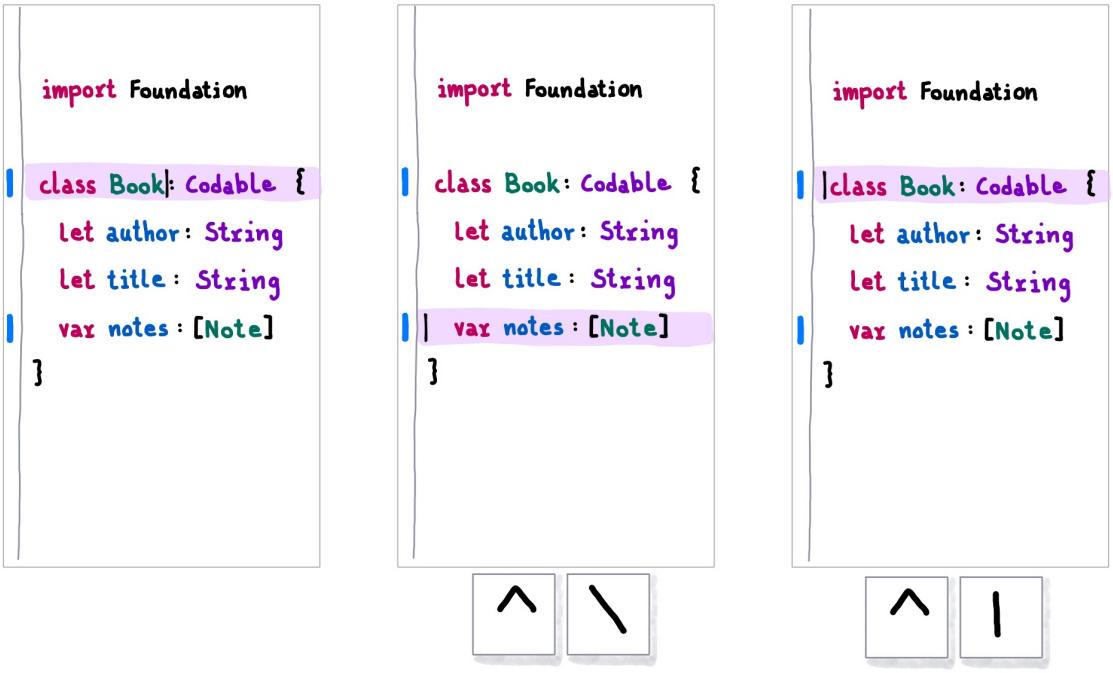

Debug Gauges

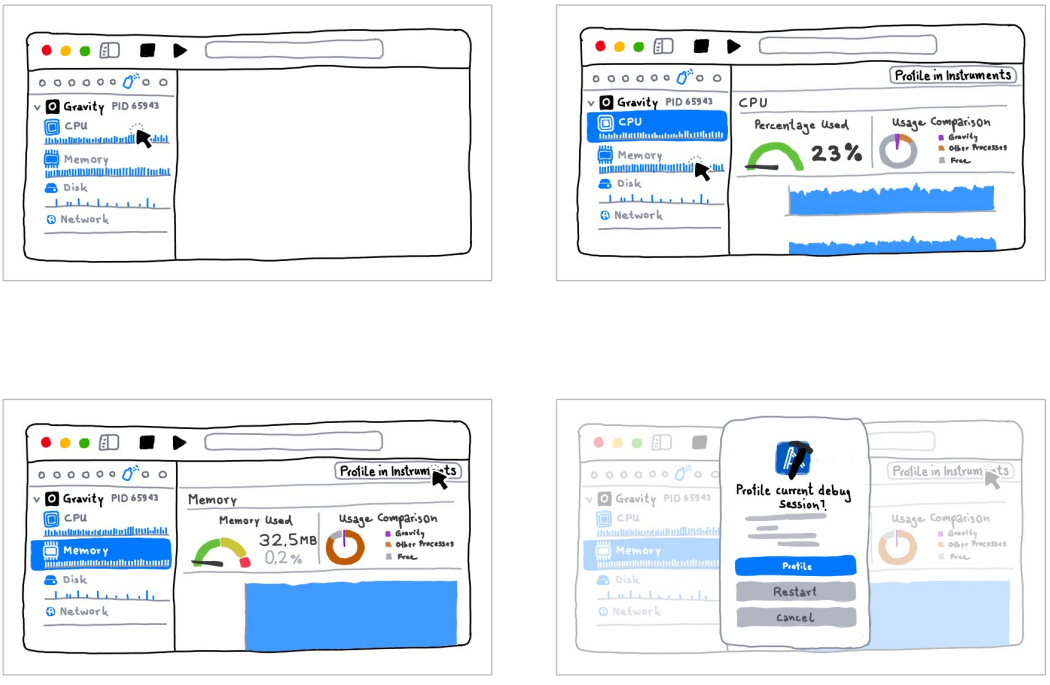

Column Breakpoint I

xcode.tips

Deactivate/Remove Column Breakpoint

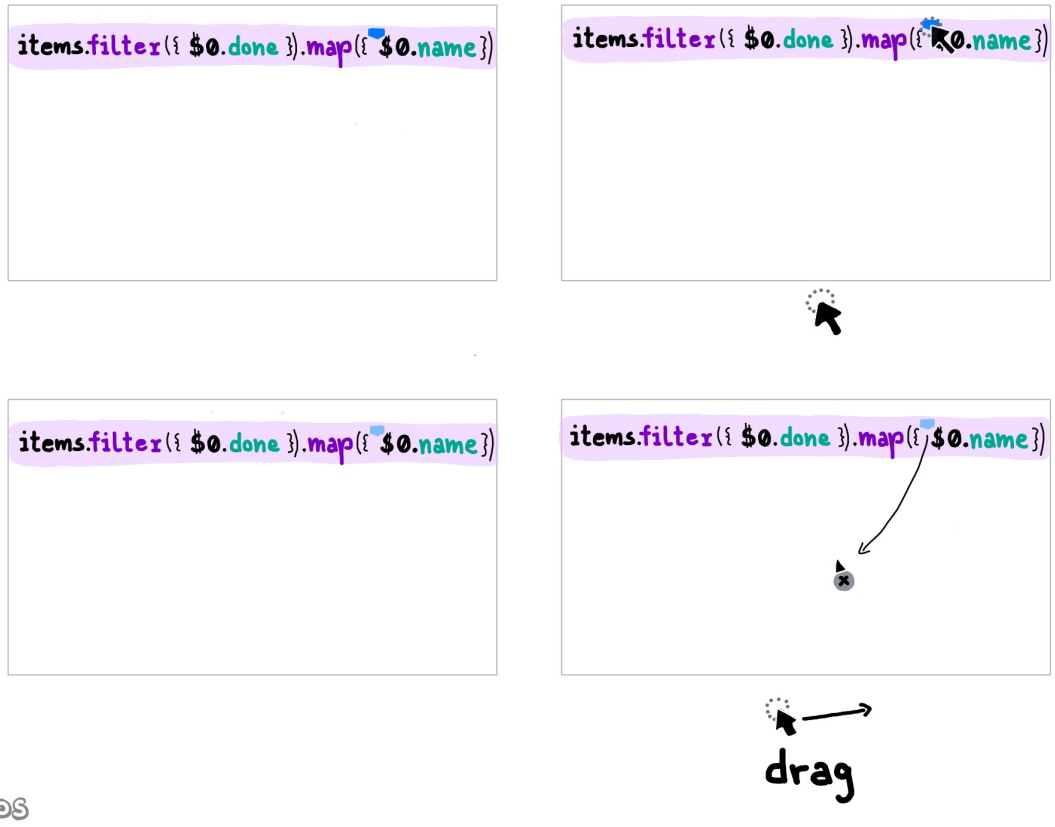

xcode.tips

Delete To End Of Line

```
let name: String
let type: String
```

```
let name: String
let type:
```



Fix All Issues

```
DispatchQueue.main.async {
    self?.items = items        Cannot use optional chaining
    self?.update(with: items)  Cannot use optiona
}
```

```
DispatchQueue.main.async {
    self.items = items
    self.update(with: items)
}
```



Reveal In Changes Navigator

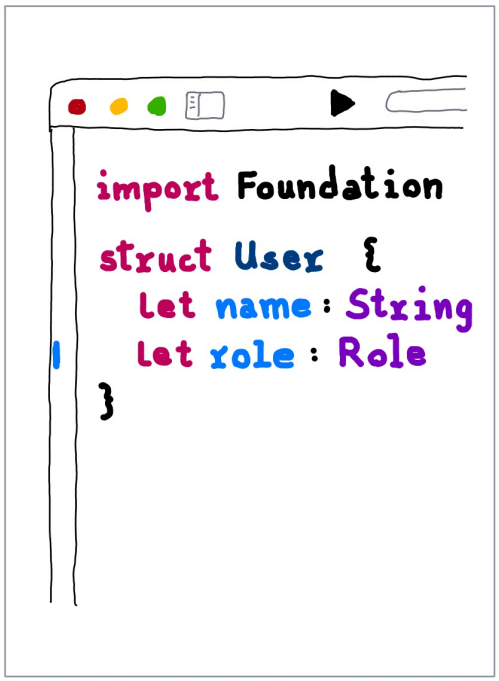

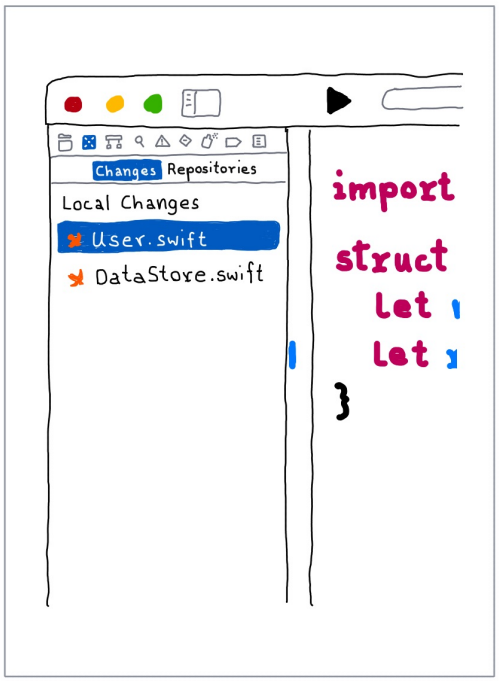



Embed Selected Text

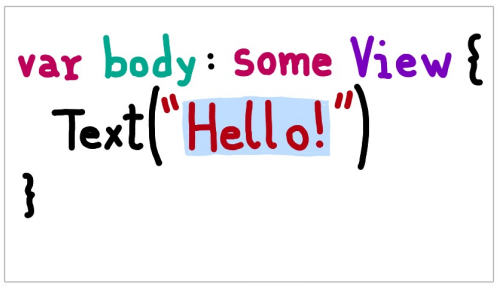

Fold / Unfold

⌥ ⌘ ←

⌥ ⌘ →

```
struct Book {
  let author: String
  let notes : [Note]
}
```

```
struct Book {••• }
```

```
struct Book {
  let author: String
  let notes : [Note]
}
```

xcode.tips

39

IB: Guides

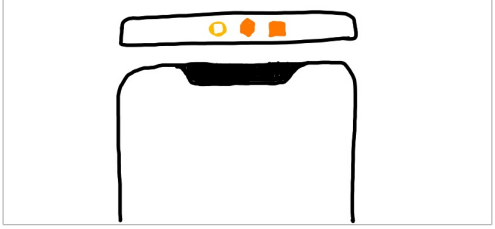

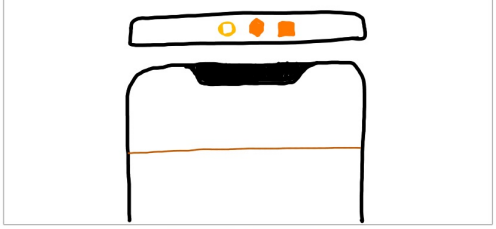

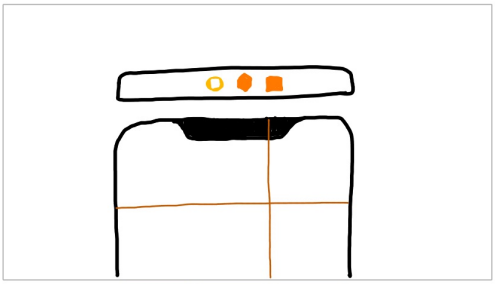

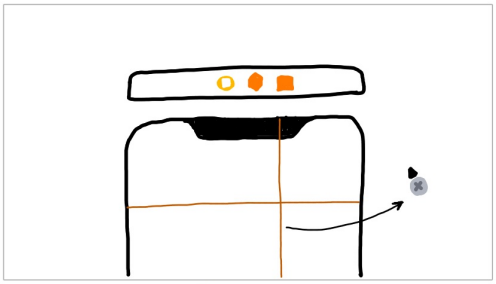

drag

xcode.tips

40

Create/Rename Window Tab

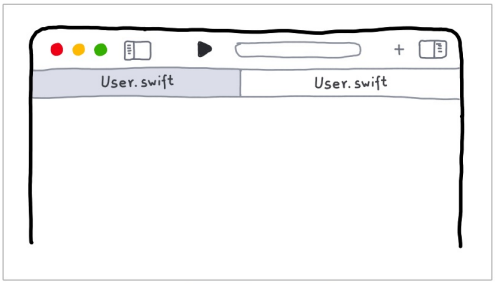

⌘ T

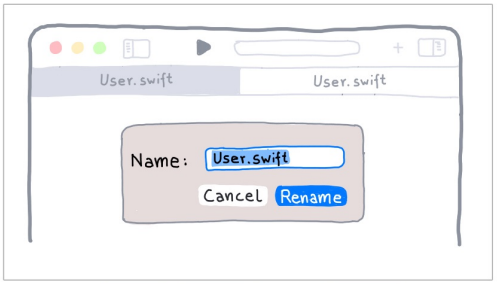

⌥ ⇧ ⌘ T

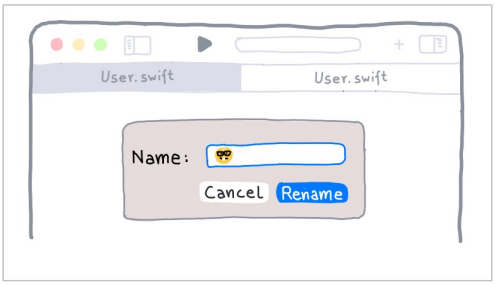

" 😎 "

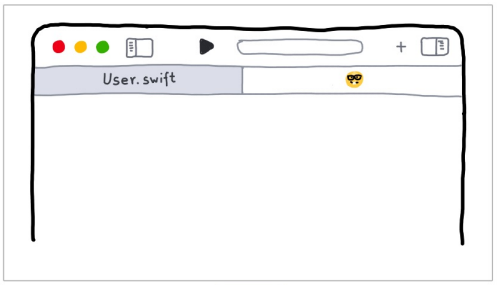

↵

Simulator: Toggle Dark Mode

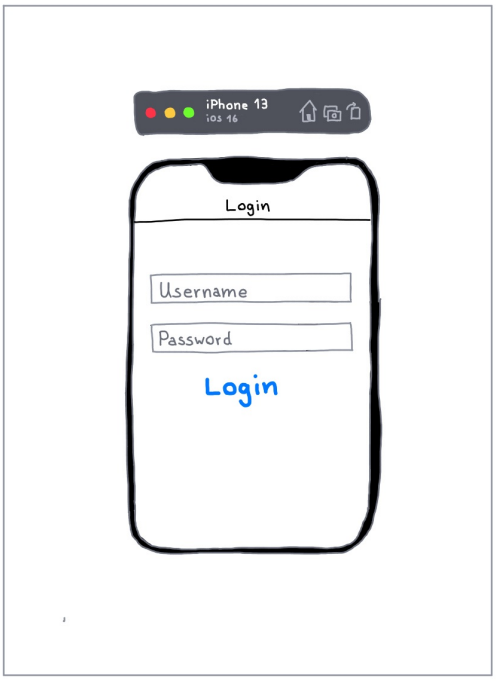

⌘ ⇧ A

Toggle Changes/Repos

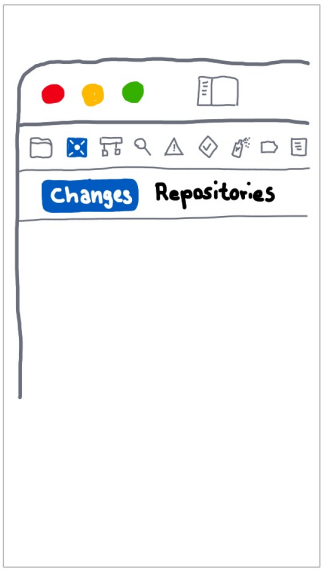

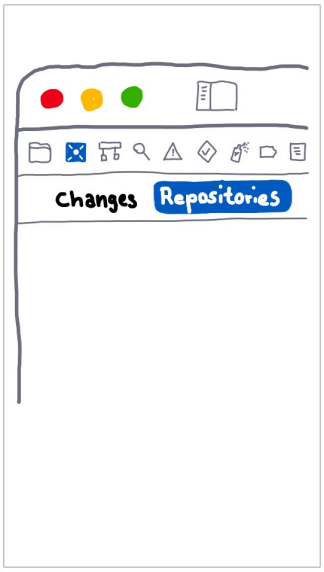

⌘ 2

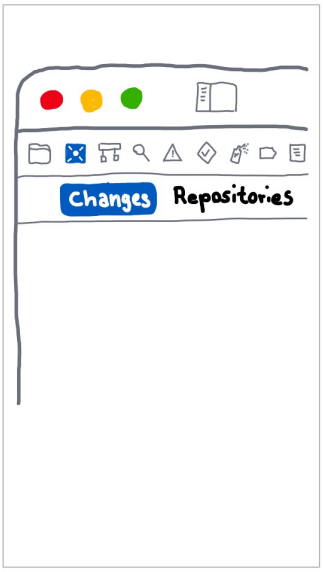

⌘ 2

xcode.tips

43

Improve Debug Output

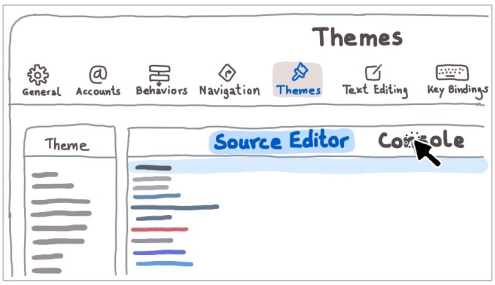

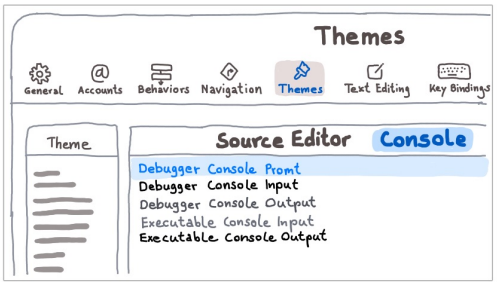

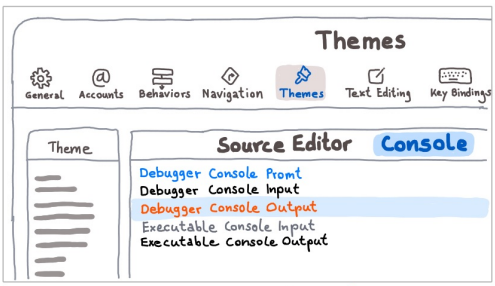

Change font color

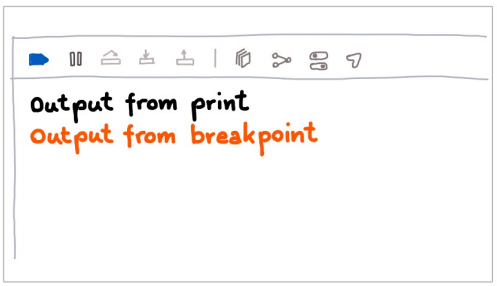

xcode.tips

44

Find Problematic Constraint

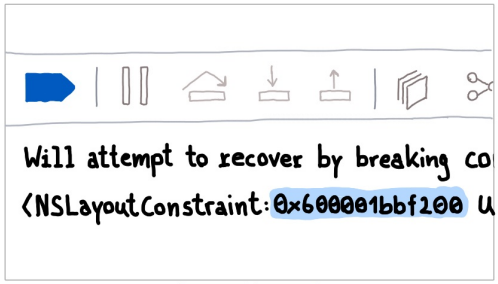

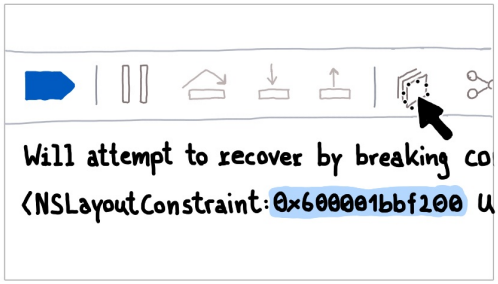

⌘ C

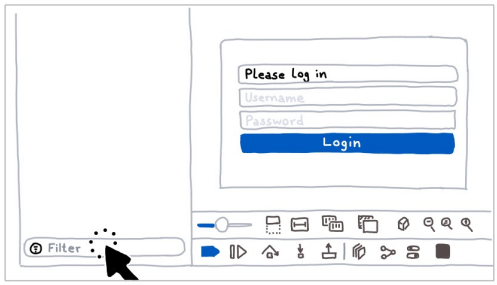

View Debugger

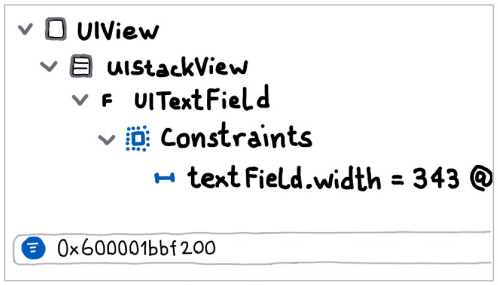

⌘ V

xcode.tips 45

Library: SF Symols

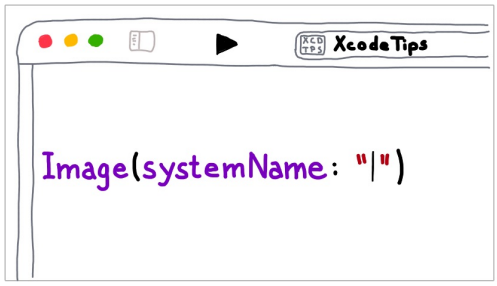

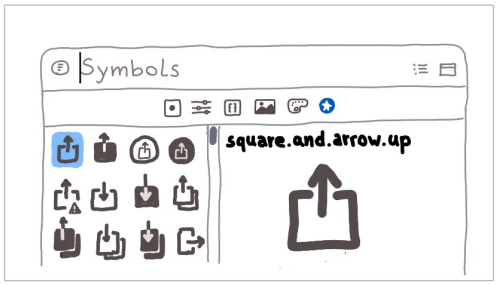

⌘ ⇧ L

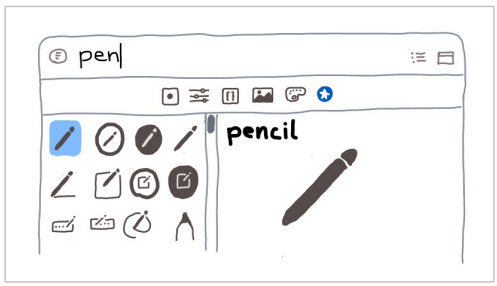

"pen"

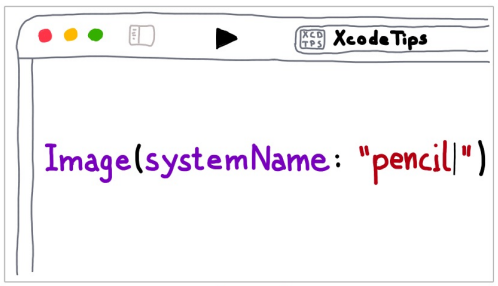

↵

xcode.tips 46

Simulator: Add Images

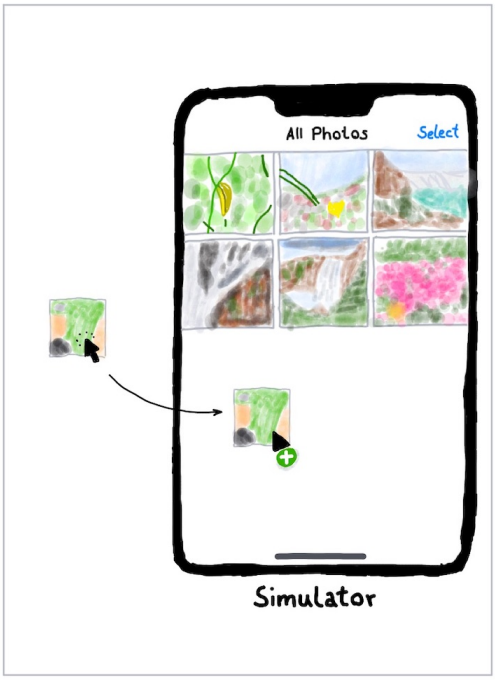

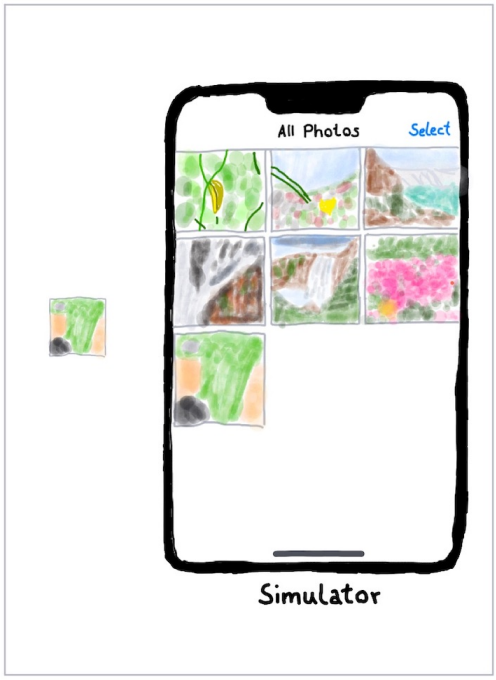

Open HIG

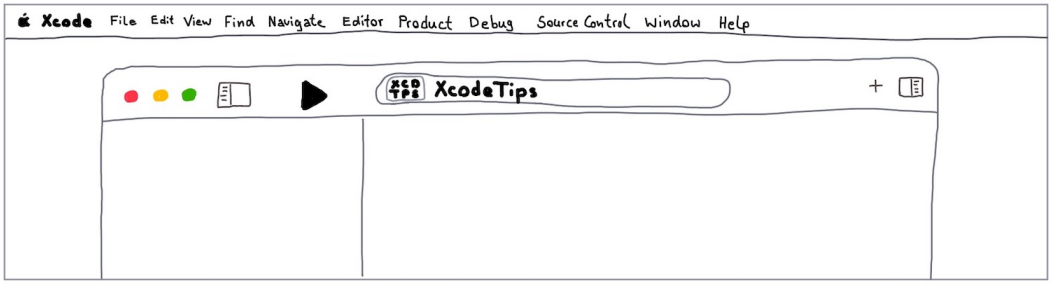

Show Non-Localized Strings

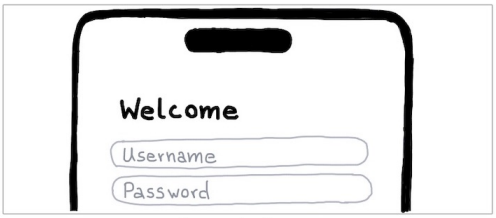

Simulator

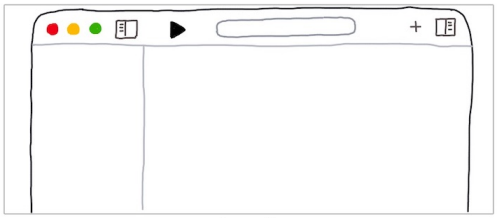

Xcode

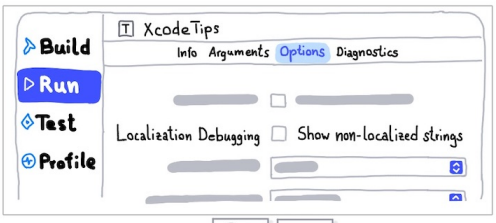

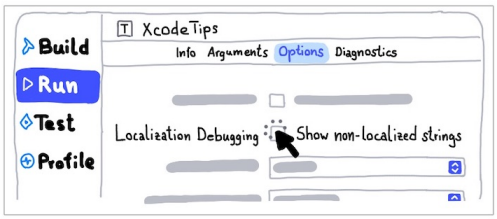

⌘ <

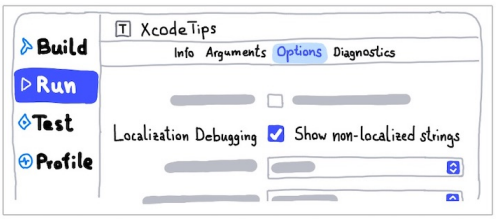

Simulator

Simulator: Save As GIF

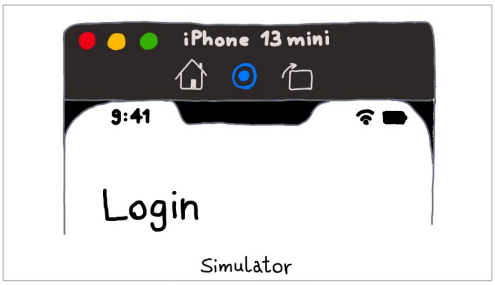

Simulator

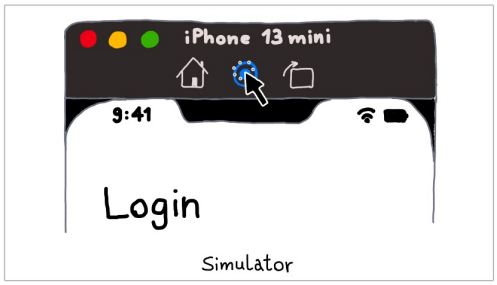

Simulator

⌘ R

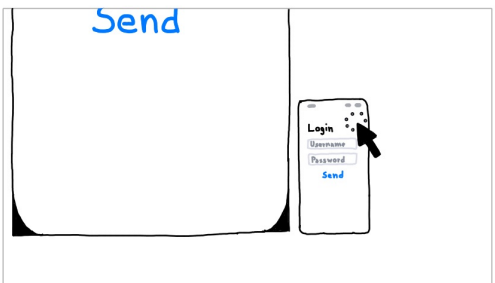

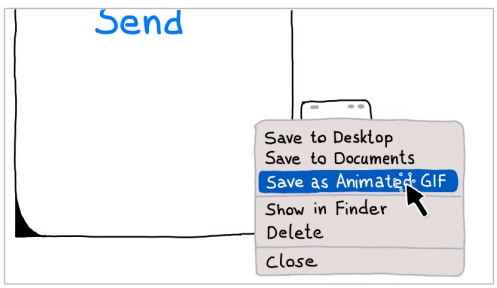

^

IB: Bounds Rectangles

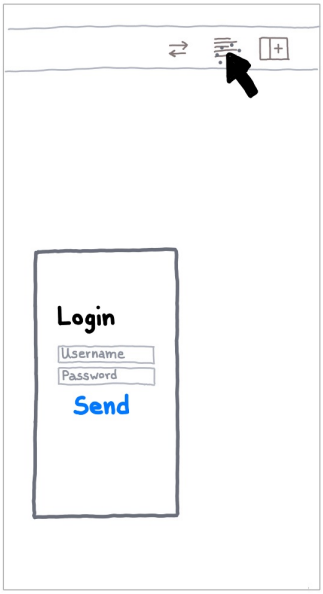

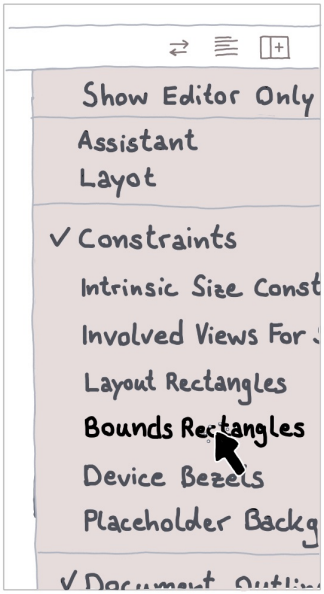

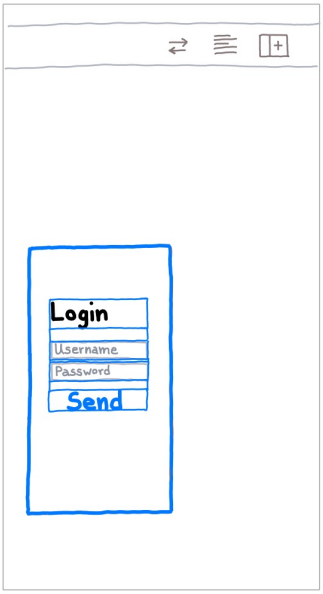

Additional Tools : Pixie

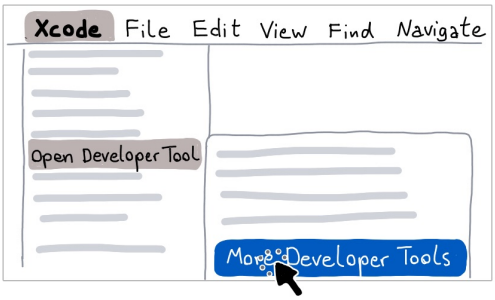

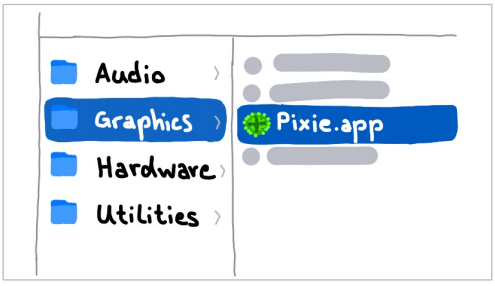

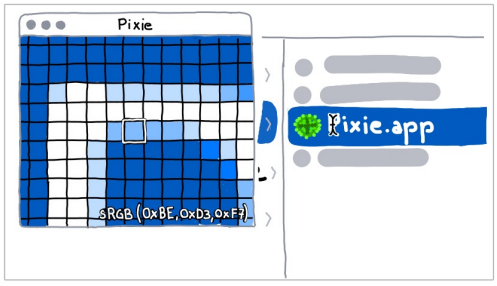



Vim Mode : Find Current Word

```
SCNNode *textNode = [
[textNode setPosition:S
[textNode setScale:SC
[self center:textNode]
```

```
SCNNode *textNode = [
[textNode setPosition:S
[textNode setScale:SC
[self center:textNode]
```

*

```
SCNNode *textNode = [
[textNode setPosition:S
[textNode setScale:SC
[self center:textNode]
```

N

```
SCNNode *textNode = [
[textNode setPosition:S
[textNode setScale:SC
[self center:textNode]
```

⇧ N

Search Scopes

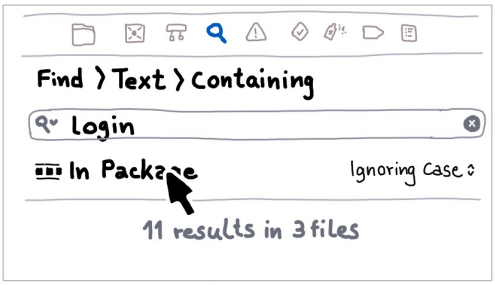

click

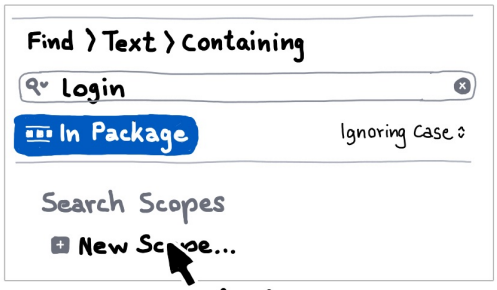

click

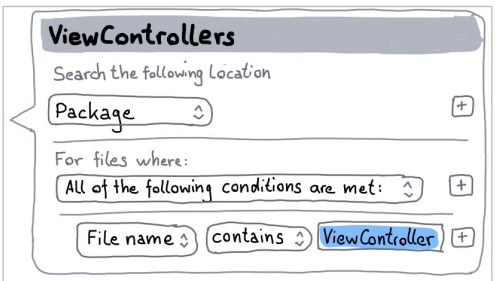

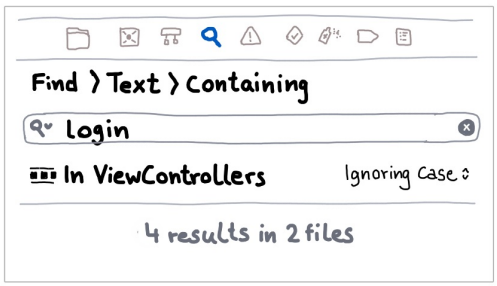

Add Errors/Warnings

```
let users = try? await loadUsers()
```

```
#error("Catch error")
#warning("Put in Task")
let users = try? await loadUsers()
```

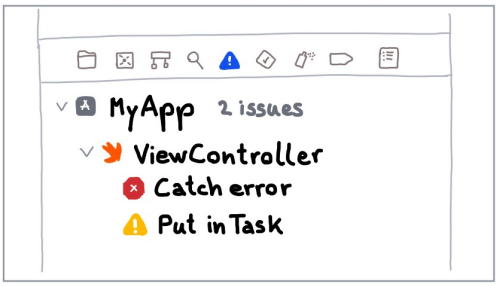

command 5

Simulator : Dynamic Type

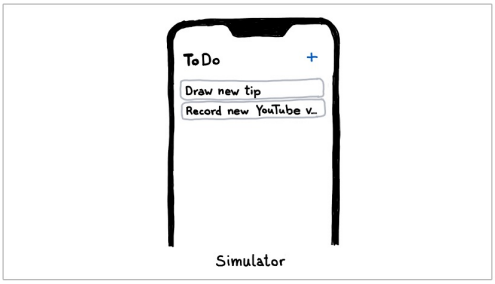

command option +

command option −

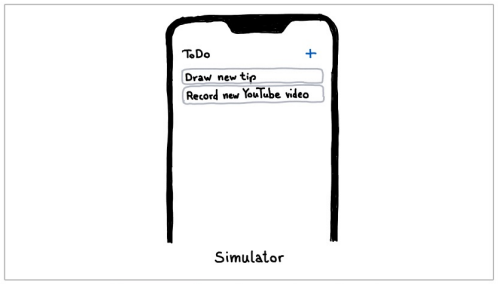

command option −

Show Only Errors

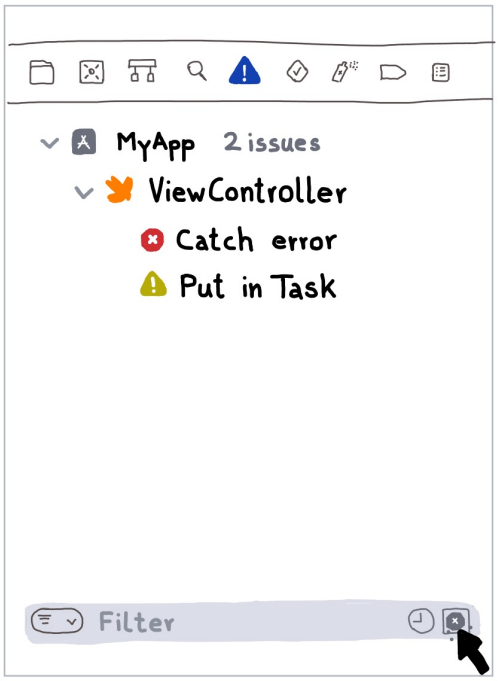

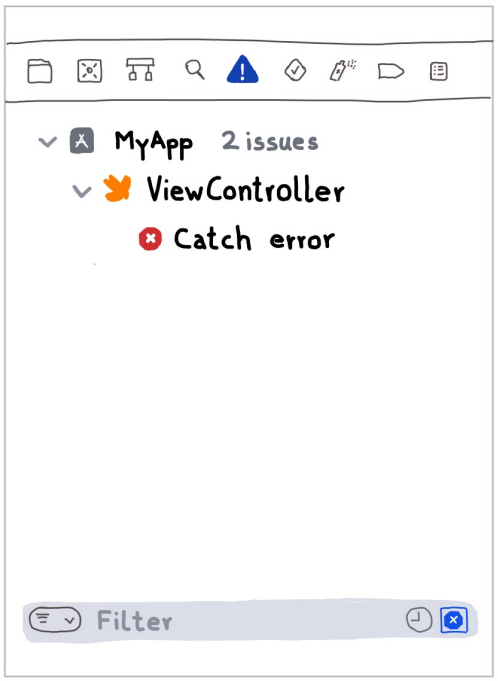

"click"

xcode.tips

Quick Actions

```
struct Book {
    let title : String
    let author : String
}
```

```
struct Book {
    let title : String
    let author : String
}
```

Quick Actions
- Jump to Definition — Navigate
- Show Callers — Editor
- Show Quick Help — Help › Show Quick Help for Selected Item
- Edit All in Scope — Editor

⌘ command + shift + A

```
struct Book {
    let title : String
    let author : String
}
```

init
Generate Memberwise Initializer — Editor › Refactor

"init"

```
struct Book {
  init(title : String , author : String
     self.title = title
     self.author = author
  }
  let title : String
```

return

xcode.tips

Format To Multiple Lines

```
func tableView(_ tableView: UITableView, didSelectRowAt indexPath: IndexPath) {

}
```

```
func tableView(
  _ tableView: UITableView,
  didSelectRowAt indexPath: IndexPath
) {
```

control ^ M

Find Ancestor Types

```
import UIKit

class TipCell: UITableViewCell {
  @IBOutlet var title: UILabel!
}
```

```
import UIKit

class TipCell: UITableViewCell {
  @IBOutlet var title: UILabel!
}
```

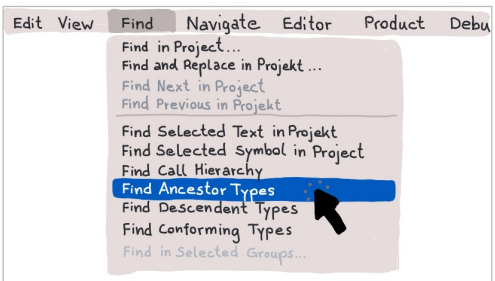

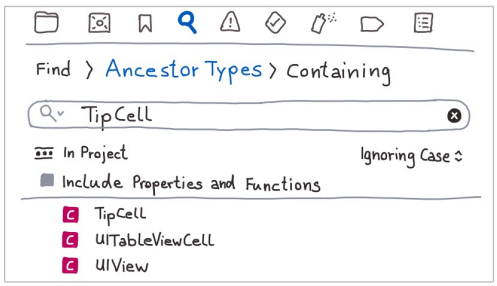

Line Bookmark

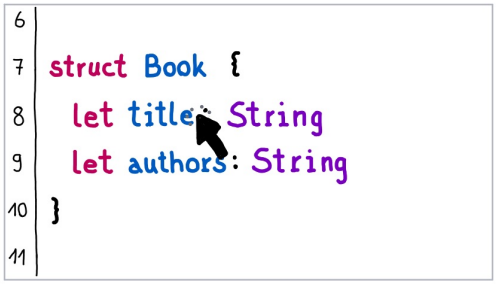

"click"

control ⌘ command '

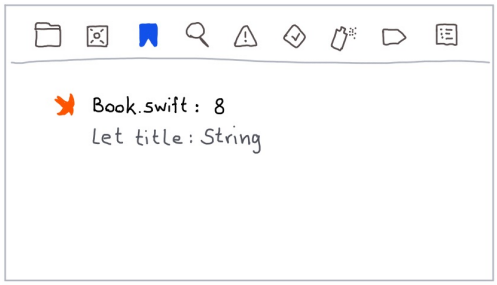

⌘ command 3

xcode.tips

Bookmark Description

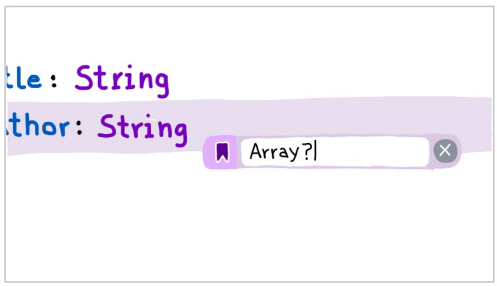

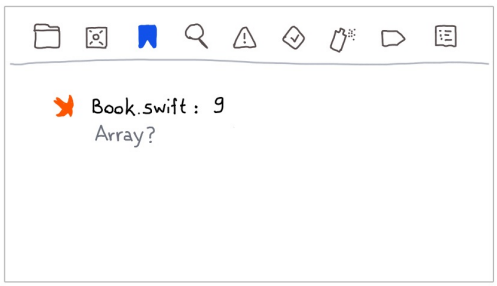

⌘ command 3

xcode.tips

Quickly Open Bookmark

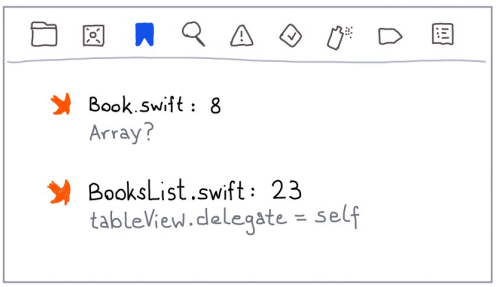

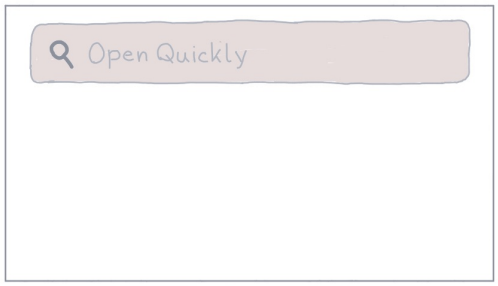

command ⌘ shift O

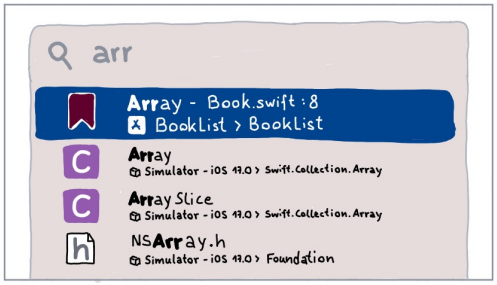

"arr"

Mark Bookmark As Complete

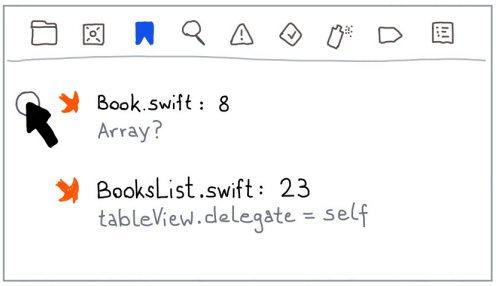

"hover"

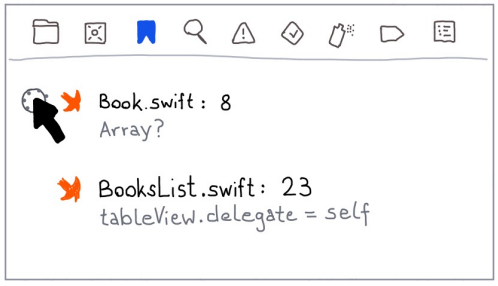

"click"

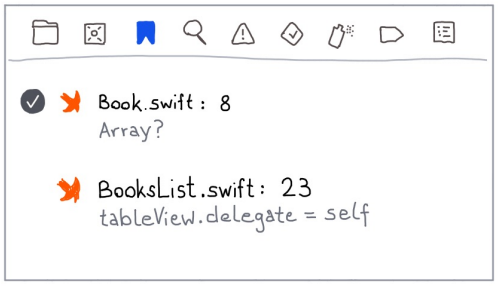

Select Next Occurrence

```
let textNode = SCNNod
textNode.position = SCNV
textNode.scale = SCNVec
scene.addChildNode(tex
```

```
let textNode = SCNNod
textNode.position = SCNV
textNode.scale = SCNVec
scene.addChildNode(tex
```

shift option ▶

```
let textNode = SCNNod
textNode.position = SCNV
textNode.scale = SCNVec
scene.addChildNode(tex
```

⌘ command ⌥ option E

```
let textNode = SCNNod
textNode.position = SCNV
textNode.scale = SCNVec
scene.addChildNode(tex
```

⌘ command ⌥ option E

xcode.tips

65