




CSCS

Centro Svizzero di Calcolo Scientifico
Swiss National Supercomputing Centre

ETH zürich

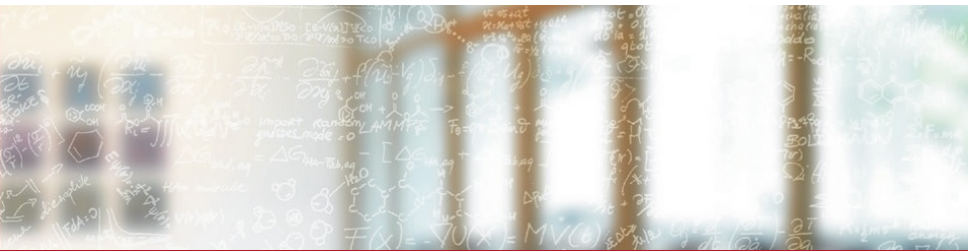

MiniApp with MPI

Summer School 2015 - Effective High Performance Computing

Maxime Martinasso, CSCS

July 22-23, 2015

Course Objectives

- Make the MiniApp runs on multiple nodes
- Add MPI function calls in the MiniApp code

MiniApp changes



- Initialize and finalize MPI
- Create a Cartesian topology
- Change linear algebra functions
- Exchange ghost cells



CSCS

Centro Svizzero di Calcolo Scientifico
Swiss National Supercomputing Centre

ETH zürich

MiniApp changes review

Initialize and finalize MPI

Setup the code to be MPI aware.

- File to edit: `main.cpp` or `main.f90`
- Initialize MPI and get the current rank and the number of ranks
- Finalize MPI

Create a Cartesian topology

Minapp uses a 2D grid, each rank will work on a sub part of the grid.

Make a 2D domain decomposition of the grid depending on the number of ranks.

- File to edit: `data.cpp` or `main.f90`
- Create the dimension of the decomposition depending on the number of ranks
- Create a non-periodic Cartesian topology for the grid of domains
- Identify coordinates of the current rank in the domain grid
- Identify neighbours of the current rank: east, west, north and south directions

Change linear algebra functions

Make the dot product and the computation of the norm over all ranks.

- File to edit: `linalg.cpp` or `linalg.f90`
- Add a collective operation to compute the dot product
- Add a collective operation to compute the norm

Exchange ghost cells

Use point to point communication to exchange ghost cells among neighbours.


- File to edit: `operators.cpp` or `operators.f90`
- Add point-to-point communication for all neighbours in all directions
- Use Non-blocking communication
- Try to overlap computation and communication



CSCS

Centro Svizzero di Calcolo Scientifico
Swiss National Supercomputing Centre

ETH zürich

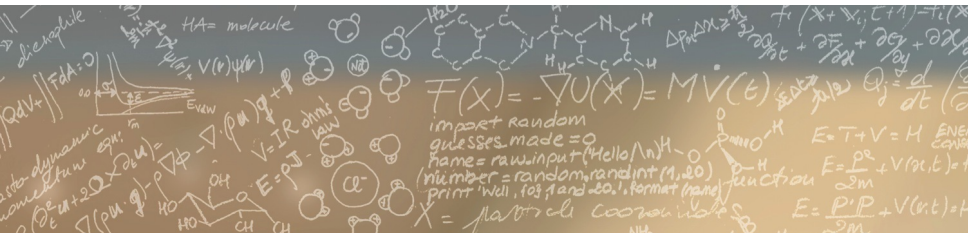

Thank you for your attention.