Agentic Legal Deposition Demo
Simple User Manual

This guide explains the application in plain language and shows the real user interface for each main tab.

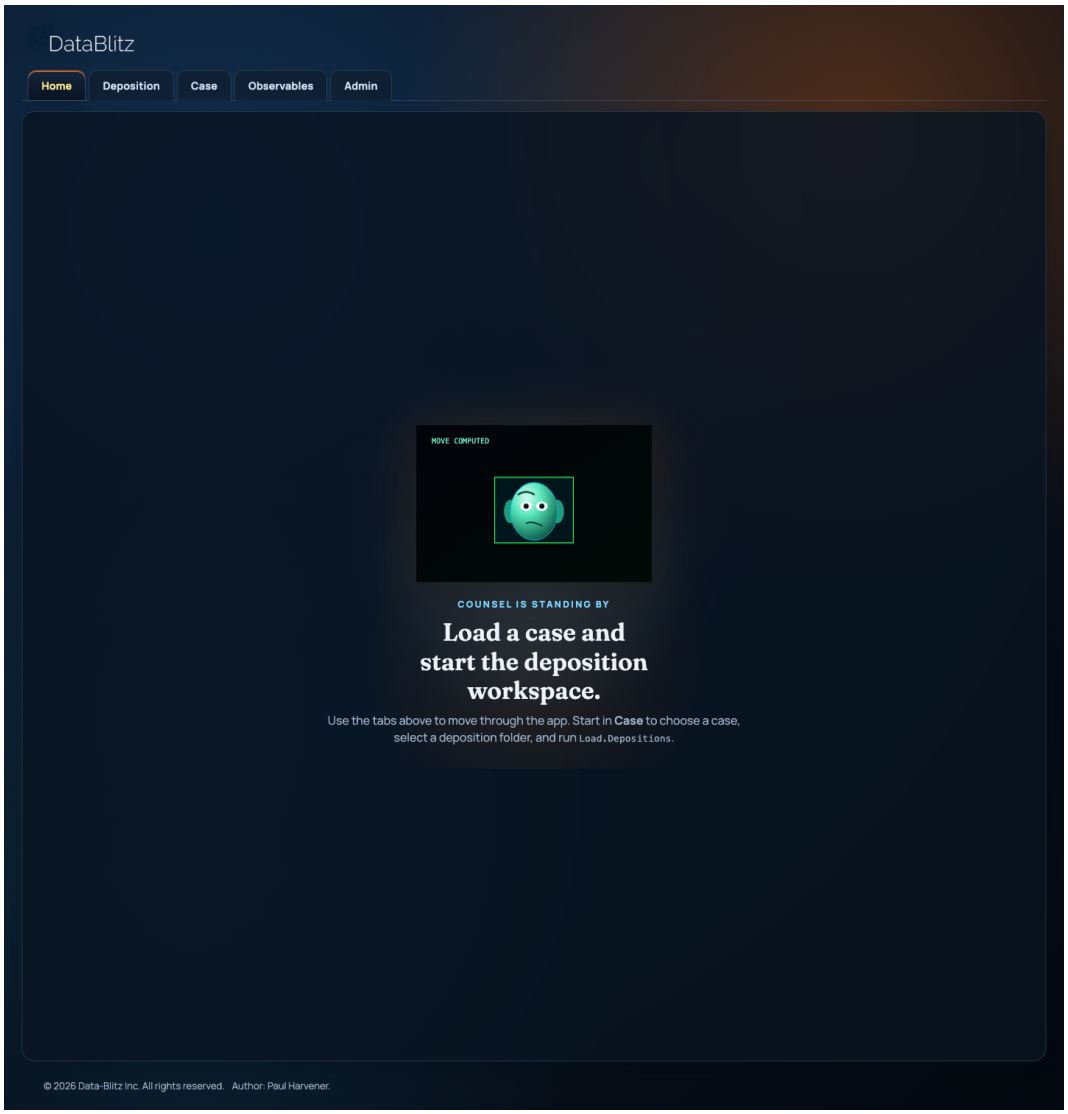

Home tab screenshot from the running application.

Quick Start

Step	What To Do
1	Open the app on the Home tab.
2	Move to Case and choose or create a case.
3	Select a deposition folder and click Load.Depositions.
4	Move to Deposition to review evidence and run analysis.

5	Use Observables to inspect runtime, RAG, and quality signals.
6	Use Admin -> Test to review test results and logs.

The normal flow is: choose a case, load depositions, analyze in Deposition, monitor in Observables, and review test status in Admin.

Table Of Contents

Click any item below to jump to that section.

Quick Start First-run workflow

Home Tab Landing page

Deposition Tab Analysis workspace

Case Tab Loading, saving, import, Graph RAG

Case Data Persisted To CouchDB What gets saved

Observables Tab Metrics and drift monitoring

What To Watch In Observables Key signals

Admin Tab Tests, logs, users

All Main Use Cases End-to-end tasks

Troubleshooting Common fixes

File Locations Saved deliverables

Home Tab

Home is the landing page. It is the clean entry point into the application.

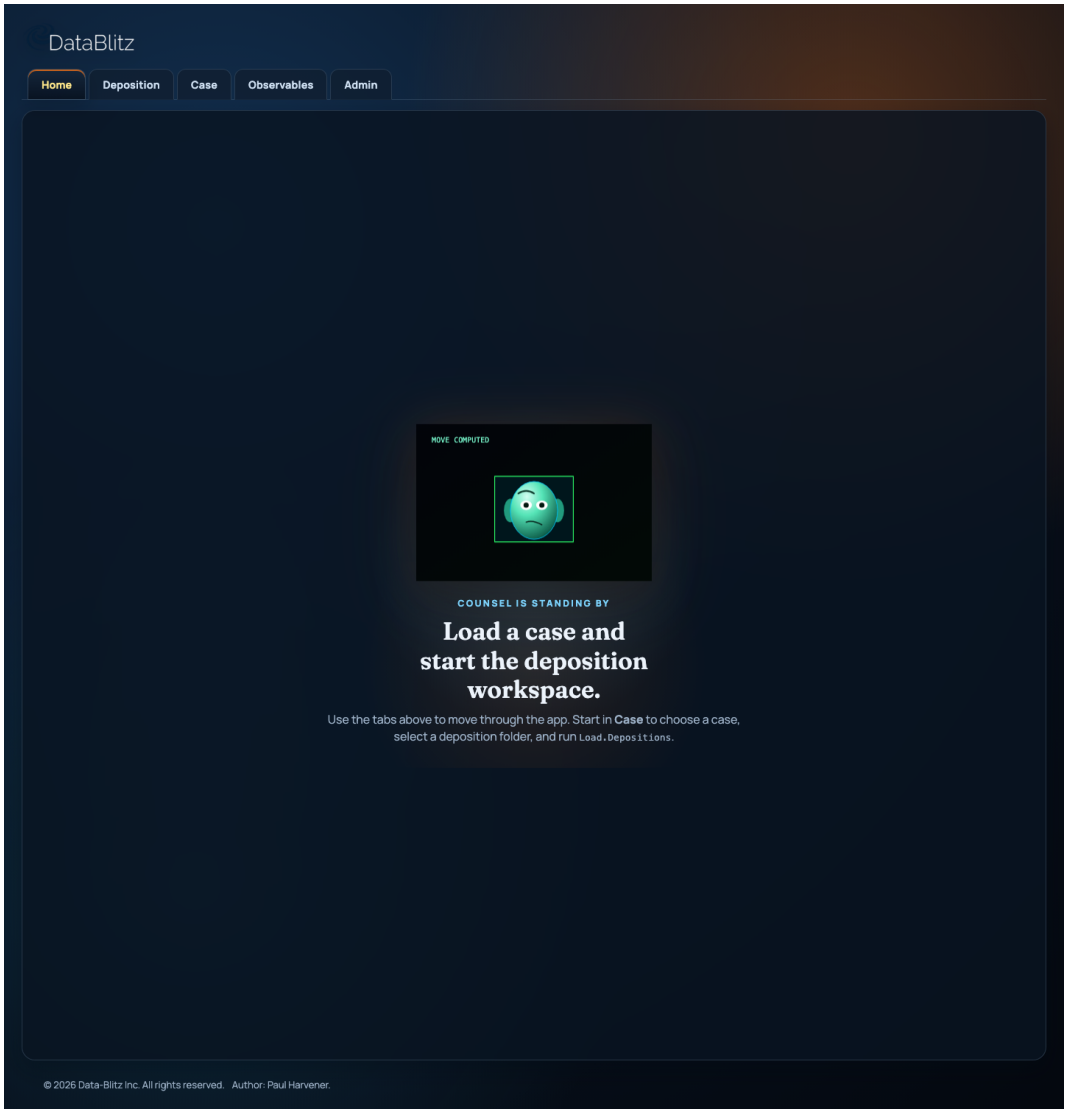

Home tab in the live UI.

- Use it when you want a neutral start state before opening a working tab.
- The navigation tabs stay visible so you can move immediately into a task.

Back to table of contents

Deposition Tab

Deposition is the main analysis workspace.

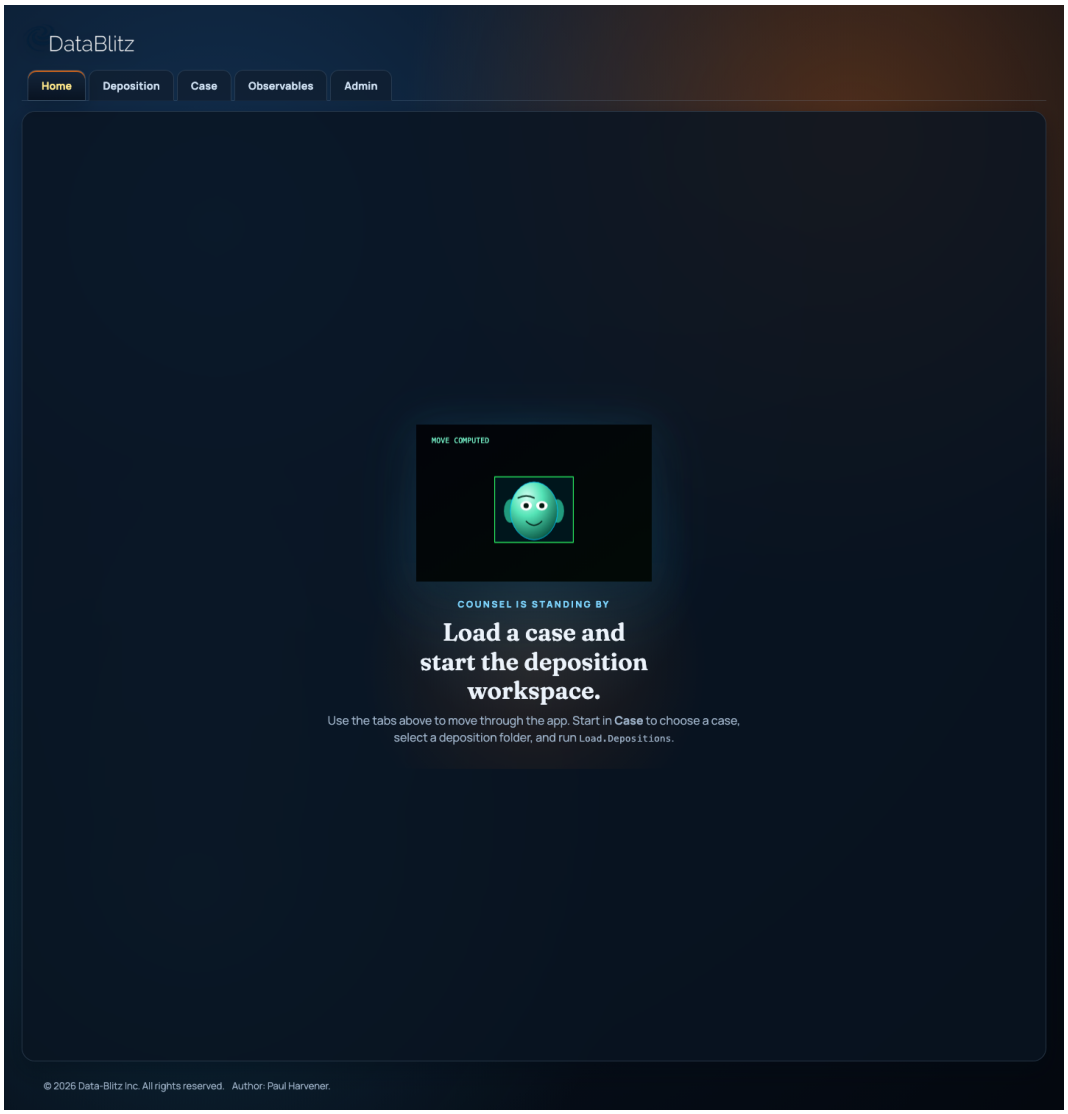

Deposition tab with a loaded case and witness data.

- Deposition Timeline shows witness order and deposition dates.
- Risk Scores give a fast triage view.
- Conflict Detail shows contradiction findings and related explanation.
- Focused Re-Analysis lets you run a deeper reasoning pass on current material.
- Summarize reduces focused analysis to a shorter version; Full Re-Analysis toggles back.
- Compute Sentiment scores the full deposition text.
- Click the sentiment card to toggle between normal and detailed explanation.
- Persona:Attorney Chat supports follow-up legal questions and case discussion.

Back to table of contents

Case Tab

Case is the operational control surface for loading, saving, importing, and configuring.

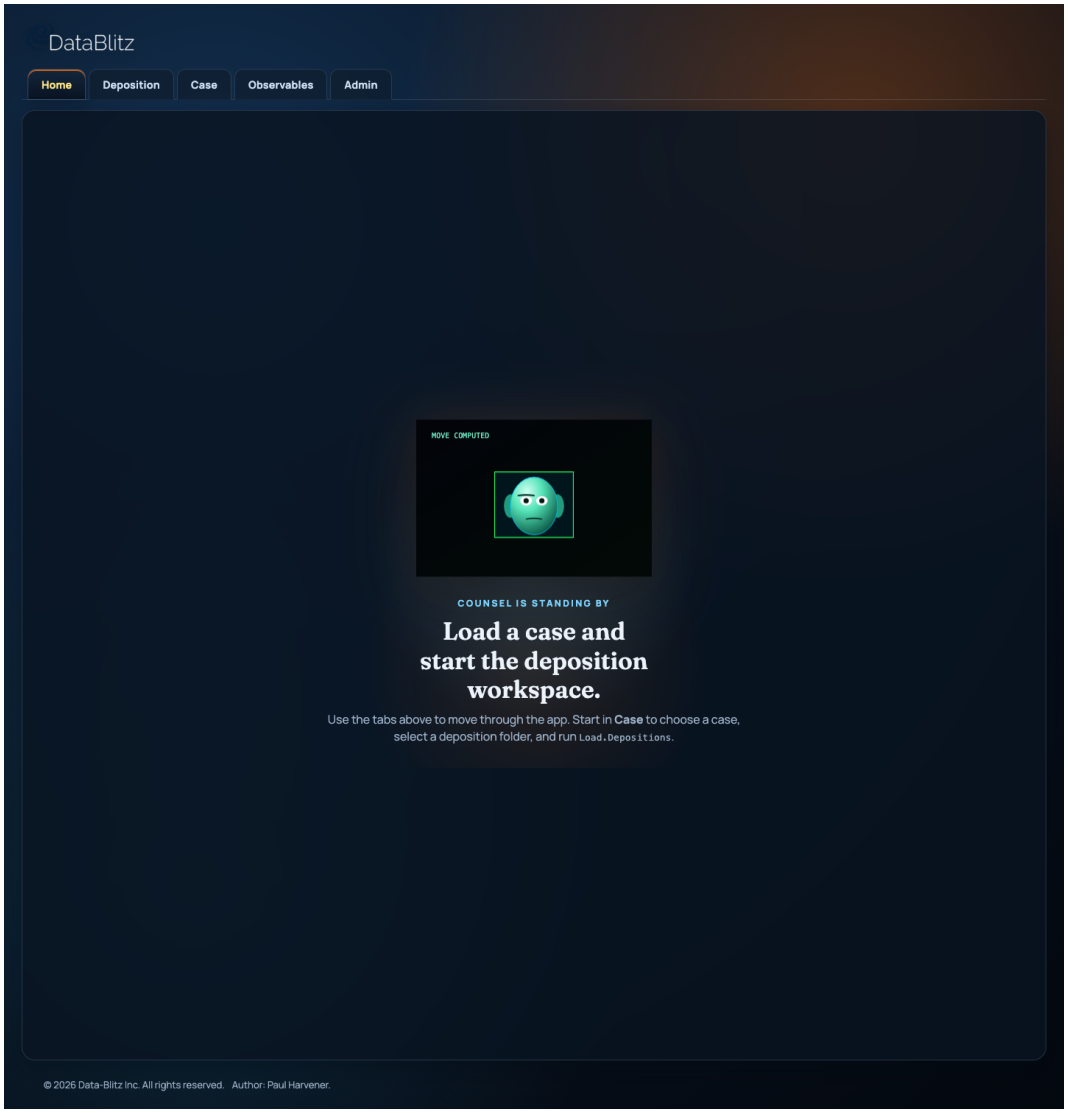

Case tab with case index and controls.

- Choose an existing case from the Case Index.
- Create a new case or duplicate the current case.
- Select the deposition folder that holds the source .txt files.
- Use Import Deposition to upload new .txt files into the current folder.
- Click Load.Depositions to ingest files into the active case.
- Save Case persists current state into CouchDB.
- Choose the active LLM. The selected model is saved with the case.
- Use the ontology browser and Load Ontology to import .owl content into Neo4j.
- Enable or disable Graph RAG and ask graph-grounded questions.

Case Data Persisted To CouchDB

- Case metadata and selected deposition.
- Chat transcript and draft input.
- Focused analysis and summary state.
- Sentiment output and sentiment detail toggle state.
- Graph RAG, ontology, dropdown selections, and related UI context.

Back to table of contents

Observables Tab

Observables is the monitoring workspace for runtime behavior and quality signals.

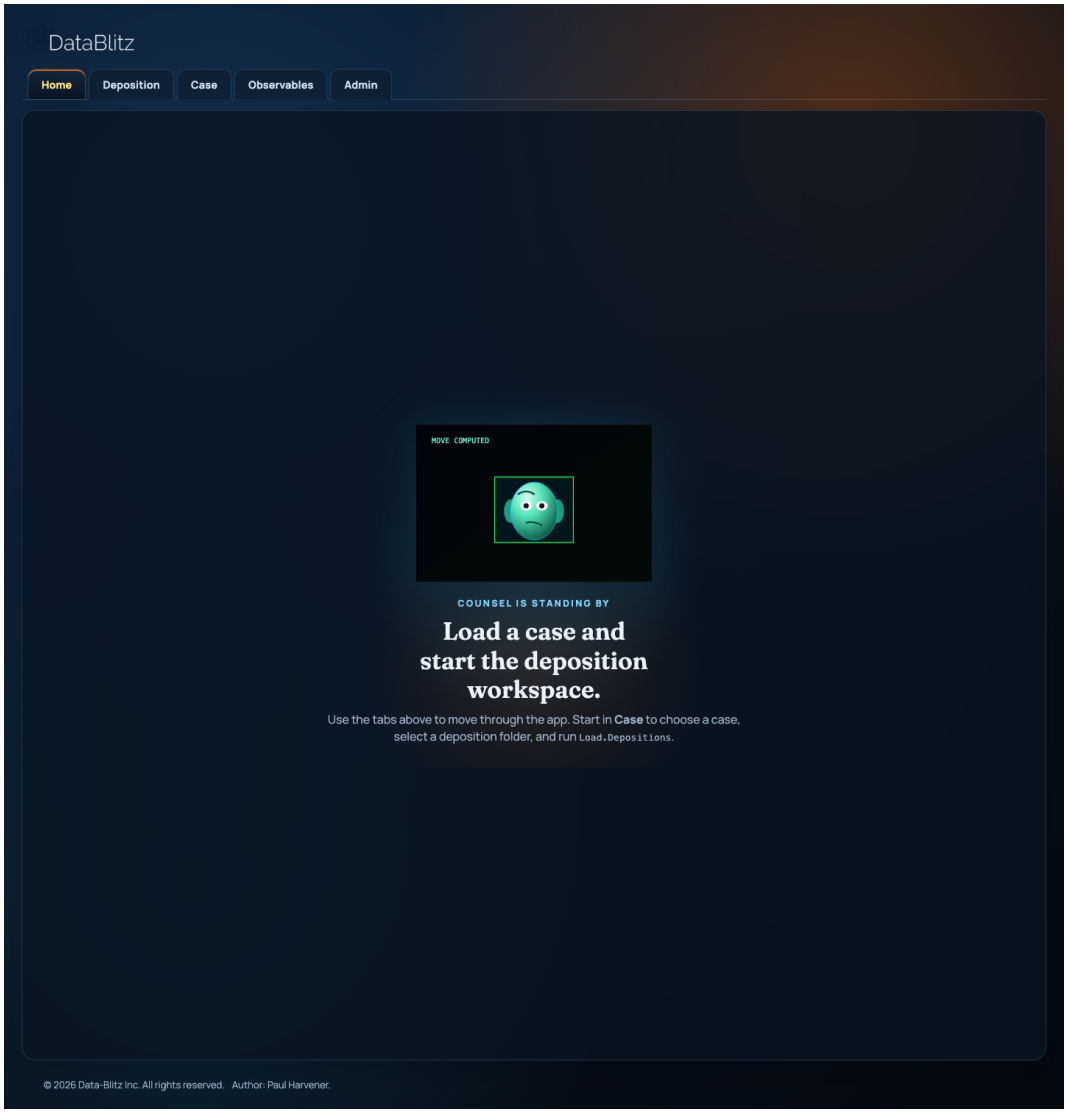

Observables tab showing live metrics and observables.

- Thought Stream displays available trace-style reasoning output when enabled.
- Runtime metrics show live operational measurements, including RAG influence.
- Correctness and Drift observables track model-quality signals and drift proxies.
- Single-click a metric to open its detailed explanation.
- Double-click a metric or press Trend to open the time graph.
- Trend views help compare how values move over time.
- The last ending metric values are remembered between runs.

What To Watch In Observables

- RAG Answer Change Rate: whether retrieval changes the output.
- RAG Context Size: how much retrieved context is sent toward the LLM.
- Schema Adherence and related quality signals: whether output shape and behavior are drifting.

Back to table of contents

Admin Tab

Admin is the internal operations and test inspection workspace.

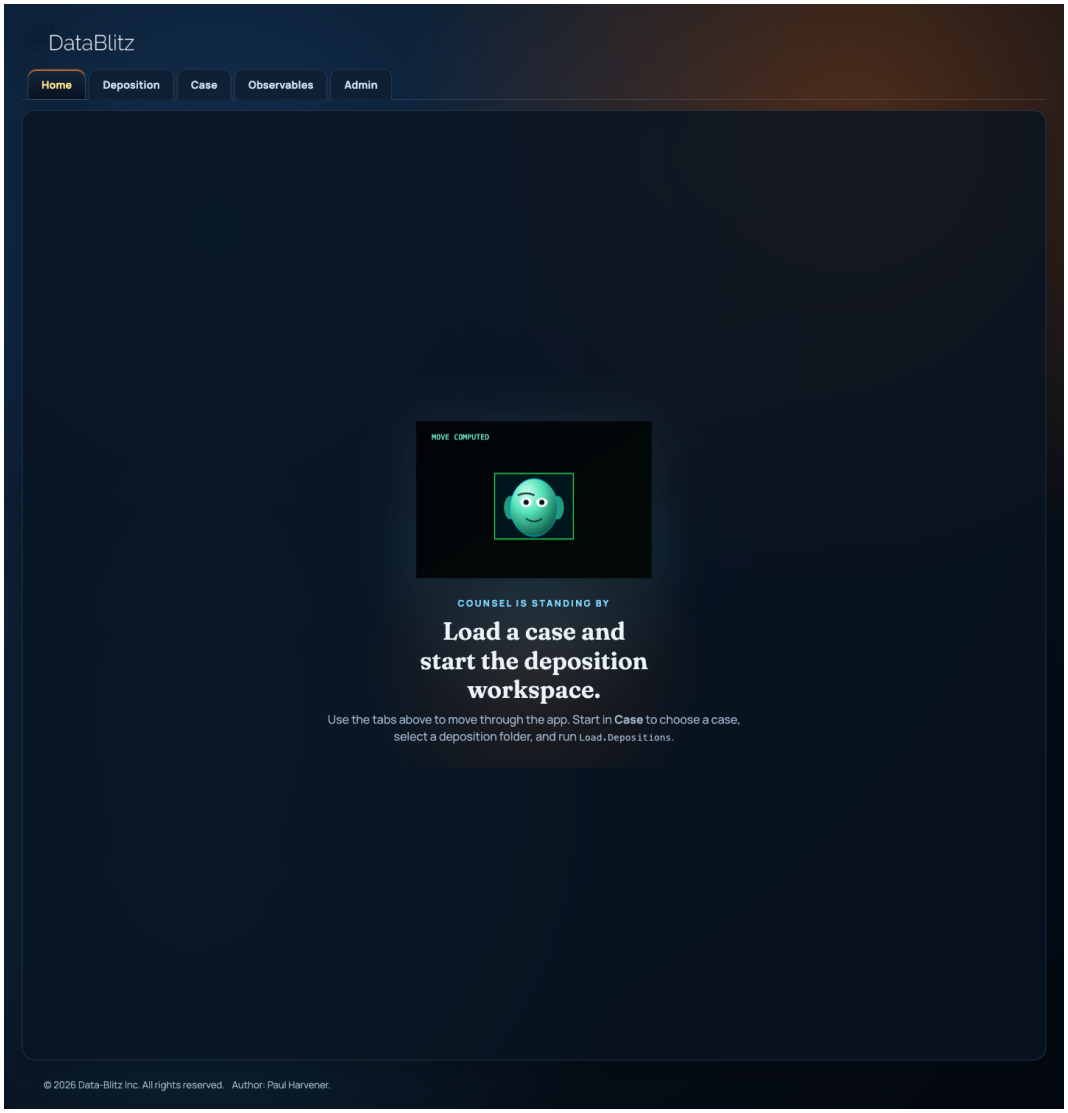

Admin tab with the Test subtab active.

- The Test subtab embeds the generated test report in the app style.
- Collected Test Log shows extracted log output from the current report.
- Add User creates lightweight admin user records.
- Reopening the Test subtab resets the embedded report to its default collapsed state.

All Main Use Cases

1. Load and review a case

- Select a case in Case.
- Run Load.Depositions.

- Review evidence in Deposition.

2. Add new evidence

- Use Import Deposition in Case.
- The app saves the new file and re-ingests the case.

3. Ask for legal interpretation

- Use Persona:Attorney Chat in Deposition.

4. Run focused reasoning and summarize it

- Use Focused Re-Analysis, then toggle between summary and full text.

5. Track live operational behavior

- Use Observables to inspect metrics, detail views, and trend graphs.

6. Verify system health and tests

- Use Admin -> Test for the themed test report, logs, and user management.

Back to table of contents

Troubleshooting

- If Load.Depositions appears inactive, verify Case ID, deposition folder, and active model selection.
- If ontology import fails, verify Neo4j is running and the chosen .owl path exists.
- If Graph RAG returns nothing, verify RAG is enabled and ontology content is loaded first.
- If the Admin Test report is stale, rerun tests and reopen the Test subtab.
- If the UI looks cached, restart with the Bounce script.

File Locations

- Manual PDF: /Users/paulharvener/workspace/demos/agentic-legal-deposition-demo/docs/user-manual.pdf
- Tab screenshots: /Users/paulharvener/workspace/demos/agentic-legal-deposition-demo/docs/screenshots/

Author: Paul Harvener.

Back to front page