# Economist

Hanh Nguyen 5/21/2017


```
library(ggplot2)
library(ggrepel)
library(dplyr)
##
## Attaching package: 'dplyr'
## The following objects are masked from 'package:stats':
##
##
       filter, lag
## The following objects are masked from 'package:base':
##
##
       intersect, setdiff, setequal, union
library(reshape2)
dat = read.csv(file="/Users/user/GitHub/data-vis/dataSets/EconomistData.csv",header=TRUE)
dat$CPI.Rank = rank(dat$CPI,ties.method="first")
```

The dataset consists of countries scored on how corrupt their public sectors are seen to be (Corruption Perceptions Index - CPI) and on achievement in key dimensions of human development: a long and healthy life, being knowledgeable and have a decent standard of living (Human Development Index - HDI).

#### 1. Visualization on national level

#### **Human Development summary**


```
dat %>%
  ggplot(aes(x = Region, y = HDI)) + geom_boxplot()
```

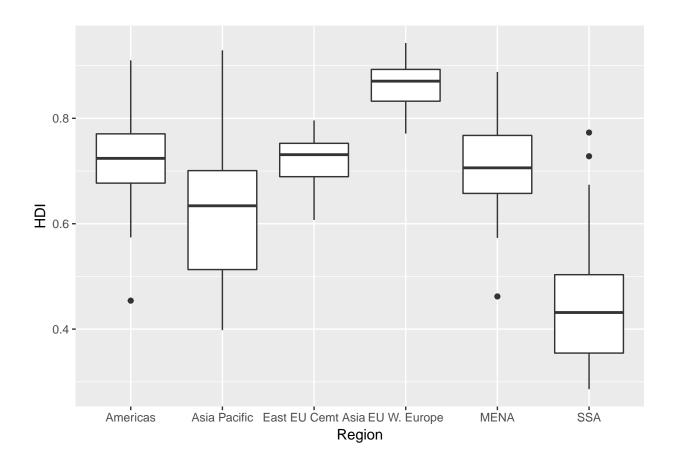

### Human Development on the world map

```
dfworldmap = map_data("world")
map_data = merge(dfworldmap, dat,by.x="region",by.y="Country",all.x=TRUE)
map_data = transform(map_data, HDI = cut_number(HDI, 10))
map_data = map_data[order(map_data$order),]
map_data %>%
    ggplot(aes(x=long, y=lat, group=group)) +
    geom_polygon(aes(fill = HDI)) +
    scale_fill_grey(start=1, end =.3) +
    geom_path(colour='black') +
    coord_map() +
    ggtitle("Human Development Index Ranking of the world")
```




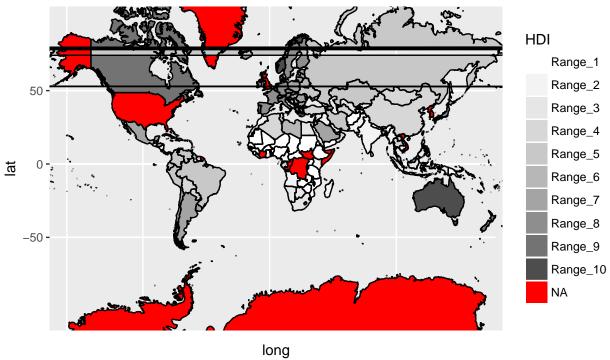

 $\operatorname{cut\_interval}$  makes n groups with equal range,  $\operatorname{cut\_number}$  makes n groups with (approximately) equal numbers of observations;  $\operatorname{cut\_width}$  makes groups of width width.

# **Corruption Perceptions**


```
dat %>%
   ggplot(aes(x = Region, y = CPI)) + geom_boxplot()
```

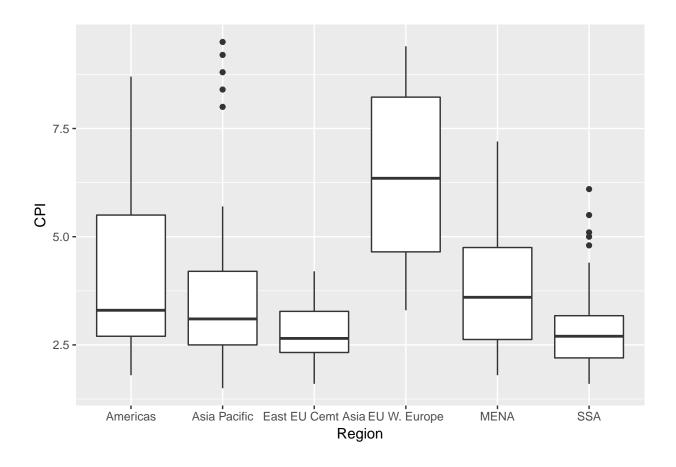

# Corruption Perceptions on the world map


```
map_data = merge(dfworldmap, dat,by.x="region",by.y="Country",all.x=TRUE)
map_data = transform(map_data, CPI = cut_number(CPI, 5))
map_data = map_data[order(map_data$order),]
map_data %>%
    ggplot(aes(x=long, y=lat, group=group)) +
    geom_polygon(aes(fill = CPI)) +
    scale_fill_grey(start=1, end =.3) +
    geom_path(colour='black') +
    coord_map() +
    ggtitle("Corruption Perceptions Index Ranking of the world")
```

### Corruption Perceptions Index Ranking of the world

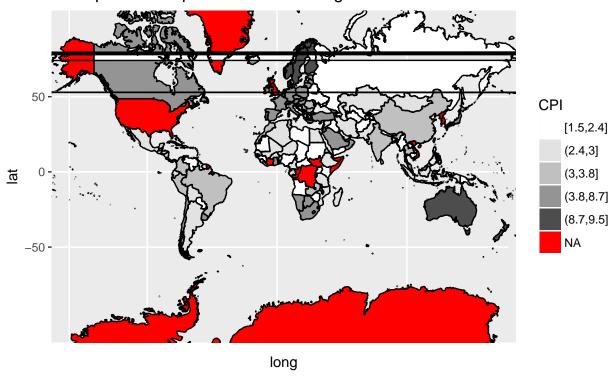

### Corruption Perceptions and Human Development

```
dat %>%
  ggplot(aes(x = CPI, y = HDI)) +
  geom_point(aes(col=Region),shape=1,stroke=1,size=2,alpha=.8) +
  geom_smooth(method="lm",se=FALSE,col="black") +
  labs(x="Corruption Perceptions Index",y="Human Development Index") +
  theme_classic() +
  geom_text_repel(data=subset(dat, HDI.Rank <=10 | CPI.Rank <=10),aes(CPI, HDI, label = Country),size=2
  expand_limits(x = 0, y = 0)</pre>
```

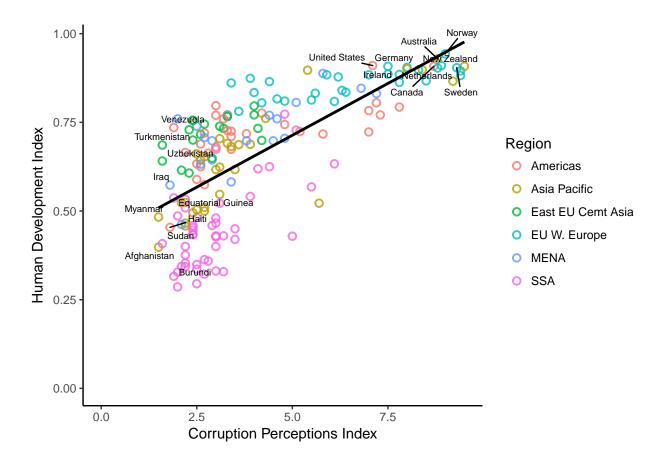


# 2. Visualization on regional level

We first aggregate (group by) the data by region

```
reg_dat= dat %>%
  group_by(Region) %>%
  summarize(avgCPI=mean(CPI,na.rm=T),avgHDI=mean(HDI,na.rm=T)) %>%
  arrange(avgCPI, avgHDI)
reg_dat$CPI.Rank = rank(reg_dat$avgCPI,ties.method="first")
reg_dat$HDI.Rank = rank(reg_dat$avgHDI,ties.method="first")
```

#### Corruption Perceptions and Human Development

```
reg_dat %>%
  ggplot(aes(x = avgCPI, y = avgHDI)) +
  geom_point(aes(col=Region),size=5) +
  labs(x="Corruption Perceptions Index",y="Human Development Index") +
  theme_classic() +
  geom_text_repel(aes(avgCPI, avgHDI, label = Region),size=3) +
  expand_limits(x = 0, y = 0) +
  guides(col=F)
```

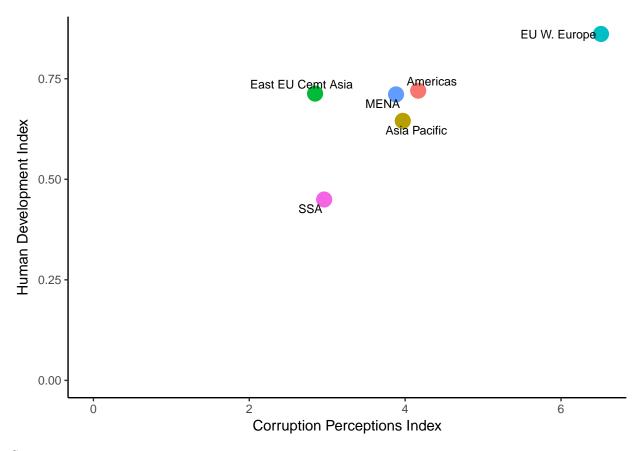

### Source:

http://tutorials.iq.harvard.edu/R/Rgraphics/Rgraphics.html#org93999d8

https://www.transparency.org/research/cpi/overview

http://hdr.undp.org/en/content/human-development-index-hdi