

SKŁADNIA SQL

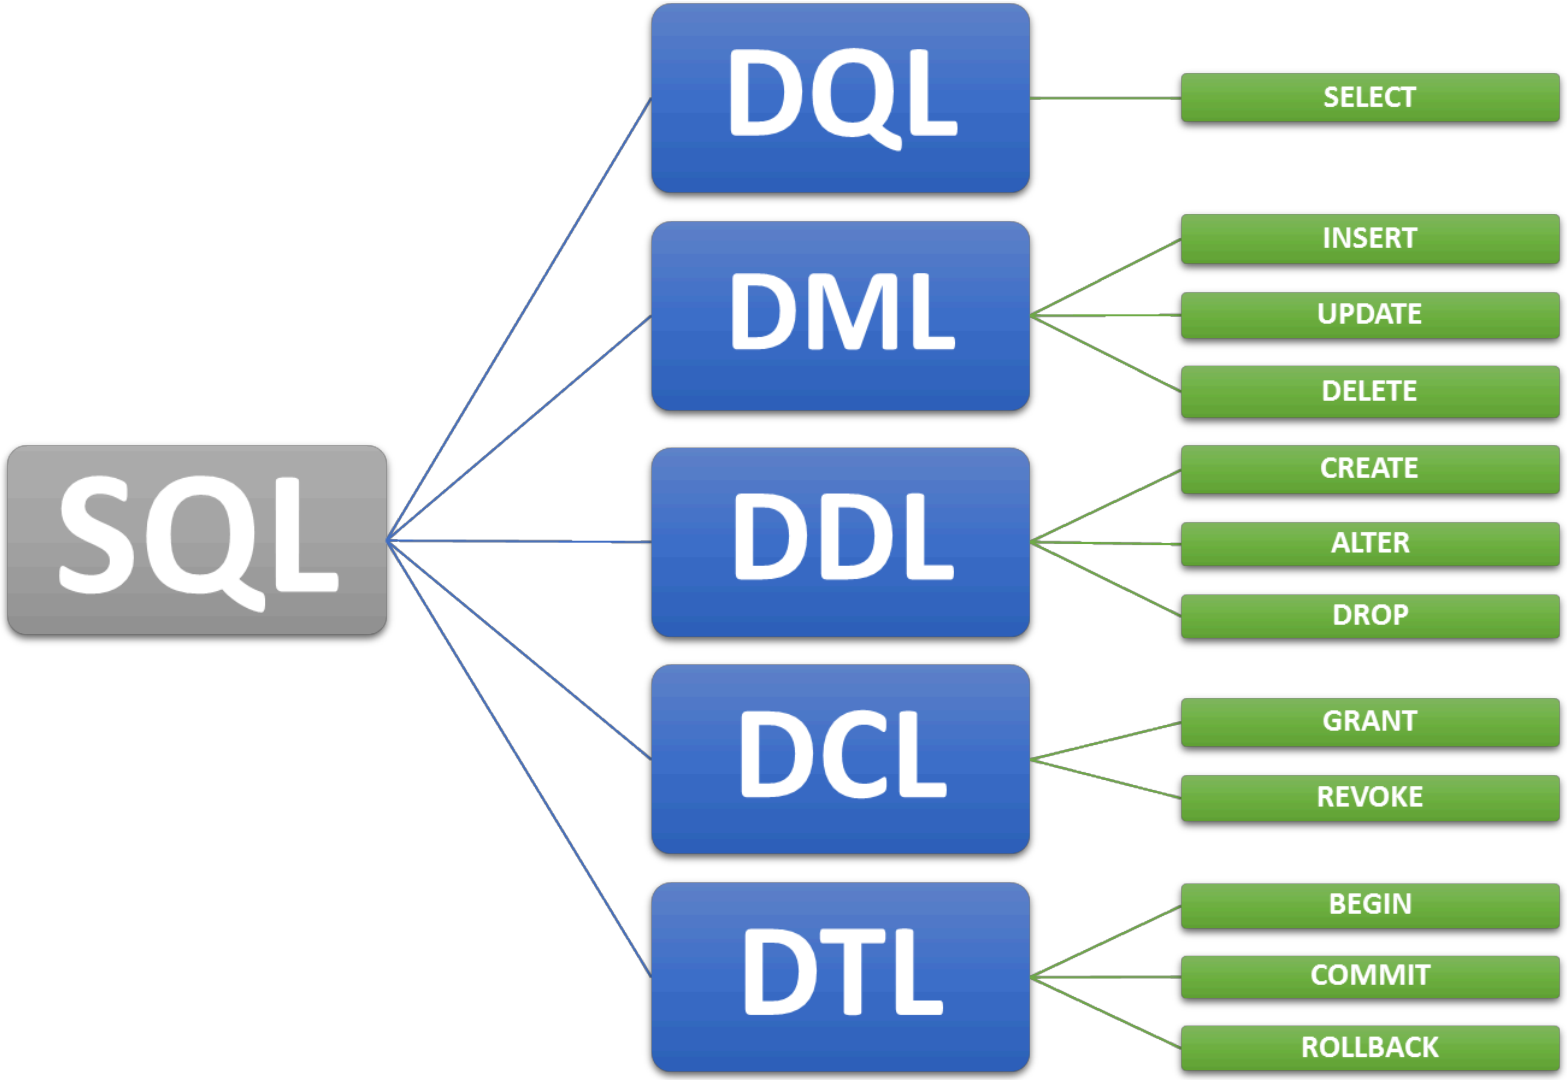

DCL – Data Control Language

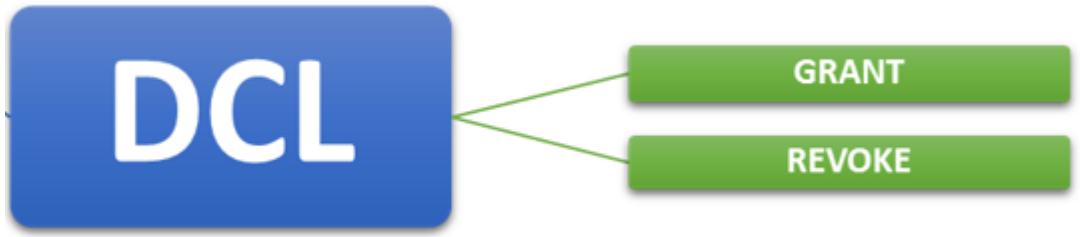

DCL – Data Control Language

GRANT <PRIVILEGE> ON <OBJECT_NAME> TO <ROLE | USER>

GRANT SELECT ON sales TO admin;

DCL – Data Control Language

REVOKE <PRIVILEGE> ON <OBJECT_NAME> FROM <ROLE | USER>

REVOKE SELECT ON sales FROM admin;

DCL – Data Control Language

```
CREATE ROLE <NAME> <ATTRIBUTES>
```

```
ALTER ROLE <NAME> <OPTIONS>;
```


```
DROP ROLE <NAME>;
```

DCL – Data Control Language

Privilege	Abbreviation	Applicable Object Types
SELECT	r (“read”)	LARGE OBJECT, SEQUENCE, TABLE (and table-like objects), table column
INSERT	a (“append”)	TABLE, table column
UPDATE	w (“write”)	LARGE OBJECT, SEQUENCE, TABLE, table column
DELETE	d	TABLE
TRUNCATE	D	TABLE
REFERENCES	x	TABLE, table column
TRIGGER	t	TABLE
CREATE	C	DATABASE, SCHEMA, TABLESPACE
CONNECT	c	DATABASE
TEMPORARY	T	DATABASE
EXECUTE	X	FUNCTION, PROCEDURE
USAGE	U	DOMAIN, FOREIGN DATA WRAPPER, FOREIGN SERVER, LANGUAGE, SCHEMA, SEQUENCE, TYPE

https://www.postgresql.org/docs/12/ddl-priv.html

DCL – Data Control Language

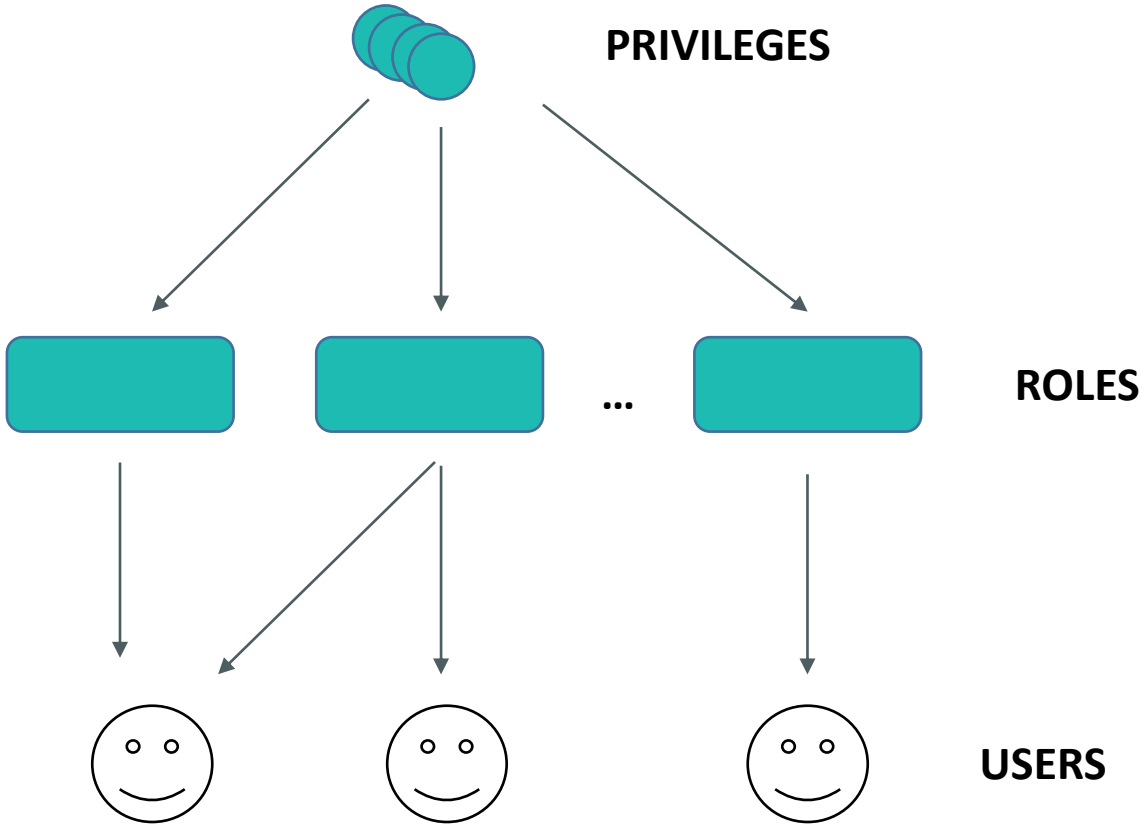

DCL – Data Control Language

