DML – Data Manipulation Language


LOCK ma miejsce gdy dwie transakcje czekają wzajemnie na zwolnienie zasobów i przynajmniej jedna z transakcji nie może kontynuować swojego działania.

DML – Data Manipulation Language

	Existing Lock Mode							
Requested Lock Mode	ACCESS SHARE	ROW SHARE	ROW EXCL.	SHARE UPDATE EXCL.	SHARE	SHARE ROW EXCL.	EXCL.	ACCESS EXCL.
ACCESS SHARE								X
ROW SHARE							X	X
ROW EXCL.					X	X	X	X
SHARE UPDATE EXCL.				X	X	X	X	X
SHARE			X	X		X	X	X
SHARE ROW EXCL.			X	X	X	X	X	X
EXCL.		X	X	X	X	X	X	X
ACCESS EXCL.	X	X	X	X	X	X	X	X

https://www.postgresql.org/docs/current/explicit-locking.html#LOCKING-TABLES

DTL – Data Transaction Language

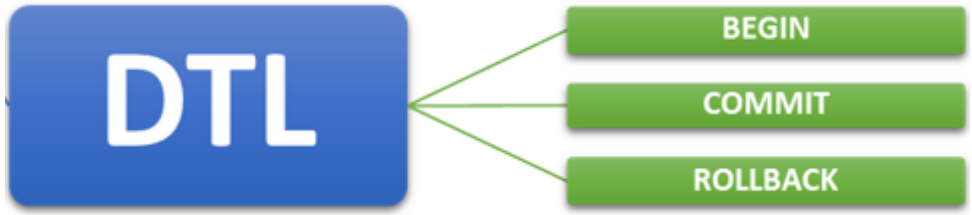

BEGIN – otwiera transakcje (END kończy)

COMMIT – akceptuje operacje już wykonane

ROLLBACK – wycofuje operacje już wykonane

LOCK

```
LOCK [ TABLE ] [ ONLY ] name [ * ] [, ...] [ IN lockmode MODE ] [ NOWAIT ]

where lockmode is one of:

    ACCESS SHARE | ROW SHARE | ROW EXCLUSIVE | SHARE UPDATE EXCLUSIVE
    | SHARE | SHARE ROW EXCLUSIVE | EXCLUSIVE | ACCESS EXCLUSIVE
```

https://www.postgresql.org/docs/current/sql-lock.html

SET TRANSACTION

```
SET TRANSACTION transaction_mode [, ...]
SET TRANSACTION SNAPSHOT snapshot_id
SET SESSION CHARACTERISTICS AS TRANSACTION transaction_mode [, ...]

where transaction_mode is one of:

    ISOLATION LEVEL { SERIALIZABLE | REPEATABLE READ | READ COMMITTED | READ UNCOMMITTED }
    READ WRITE | READ ONLY
    [ NOT ] DEFERRABLE
```

https://www.postgresql.org/docs/current/sql-set-transaction.html