
DML – Data Manipulation Language

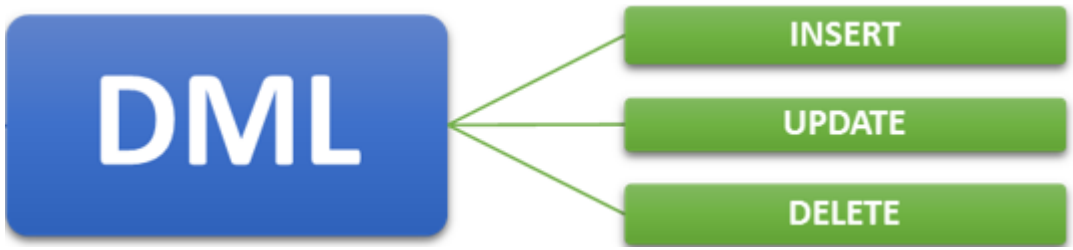

DML - MERGE

Przed PostgreSQL 9.5

```
MERGE INTO table [ [ AS ] alias ]
USING source-query
ON join_condition
[when_clause [...]]

where when_clause is

{ WHEN MATCHED [ AND condition ] THEN { merge_update | DELETE }
  WHEN NOT MATCHED [ AND condition ] THEN { merge_insert | DO NOTHING } }

where merge_update is

UPDATE SET { column = { expression | DEFAULT } |
           ( column [, ...] ) = ( { expression | DEFAULT } [, ...] ) } [, ...]

and merge_insert is

INSERT [( column [, ...] )] { VALUES ( { expression | DEFAULT } [, ...] ) | DEFAULT VALUES }
```

https://wiki.postgresql.org/wiki/MergeTestExamples

https://www.postgresql.org/message-id/attachment/23520/sql-merge.html

DML - MERGE

Po PostgreSQL 9.5

```
[ WITH [ RECURSIVE ] with_query [, ...] ]
INSERT INTO table_name [ AS alias ] [ ( column_name [, ...] ) ]
    [ OVERRIDING { SYSTEM | USER } VALUE ]
    { DEFAULT VALUES | VALUES ( { expression | DEFAULT } [, ...] ) [, ...] | query }
    [ ON CONFLICT [ conflict_target ] conflict_action ]
    [ RETURNING * | output_expression [ [ AS ] output_name ] [, ...] ]

where conflict_target can be one of:

    ( { index_column_name | ( index_expression ) } [ COLLATE collation ] [ opclass ] [, ...] )
    ON CONSTRAINT constraint_name

and conflict_action is one of:

    DO NOTHING
    DO UPDATE SET { column_name = { expression | DEFAULT } |
                    ( column_name [, ...] ) = [ ROW ] ( { expression | DEFAULT } [, ...] ) |
                    ( column_name [, ...] ) = ( sub-SELECT )
                  } [, ...]
              [ WHERE condition ]
```

https://www.postgresql.org/docs/12/sql-insert.html

DML - MERGE

Oracle

Microsoft SQL Server

MySQL

PostgreSQL