

# Analyse des grilles d'évaluation RDA SHARC

Antoine Blanchard

19/08/2021

This is an R Markdown Notebook. When you execute code within the notebook, the results appear beneath the code.

Try executing this chunk by clicking the *Run* button within the chunk or by placing your cursor inside it and pressing *Cmd+Shift+Enter*.

## Import et nettoyage des données

```
data <- read.csv2("clean_data.csv", header = TRUE, sep = ",", row.names = "Code") %>%
  mutate(Cluster=factor(Cluster, levels = c("Findable", "Accessible", "Interoperable", "Reusable")))

data_wide <- data %>%
  filter (Cluster != "NA")
```

## Classons les réponses possibles à chaque critère

```
ordre_reponses <- c("Never", "Mandatory", "Sometimes", "Always")

cols <- c("GenTree", "Phénotypage.DROPS", "Carbone.talveg", "Données.Lidar", "Herbier.de.Guyane", "Rhizo")

data_wide[,cols] <- lapply(data_wide[,cols], factor, levels = c("Never", "Mandatory", "Sometimes", "Always"))
```


## Passons de données wide à des données narrow

```
data_narrow <- data_wide %>%
  pivot_longer (cols = cols, names_to = "Dataset", values_to = "Evaluation") %>%
  mutate(Dataset=factor(Dataset))
```

```
## Note: Using an external vector in selections is ambiguous.
## i Use `all_of(cols)` instead of `cols` to silence this message.
## i See <https://tidyselect.r-lib.org/reference/faq-external-vector.html>.
## This message is displayed once per session.
```

## Représentons graphiquement les réponses à chaque critère

```
data_narrow %>%
  ggplot(aes(x = Evaluation, fill = Cluster)) +
  geom_bar(position = position_stack(reverse = TRUE)) +
  facet_wrap(~ Dataset)
```

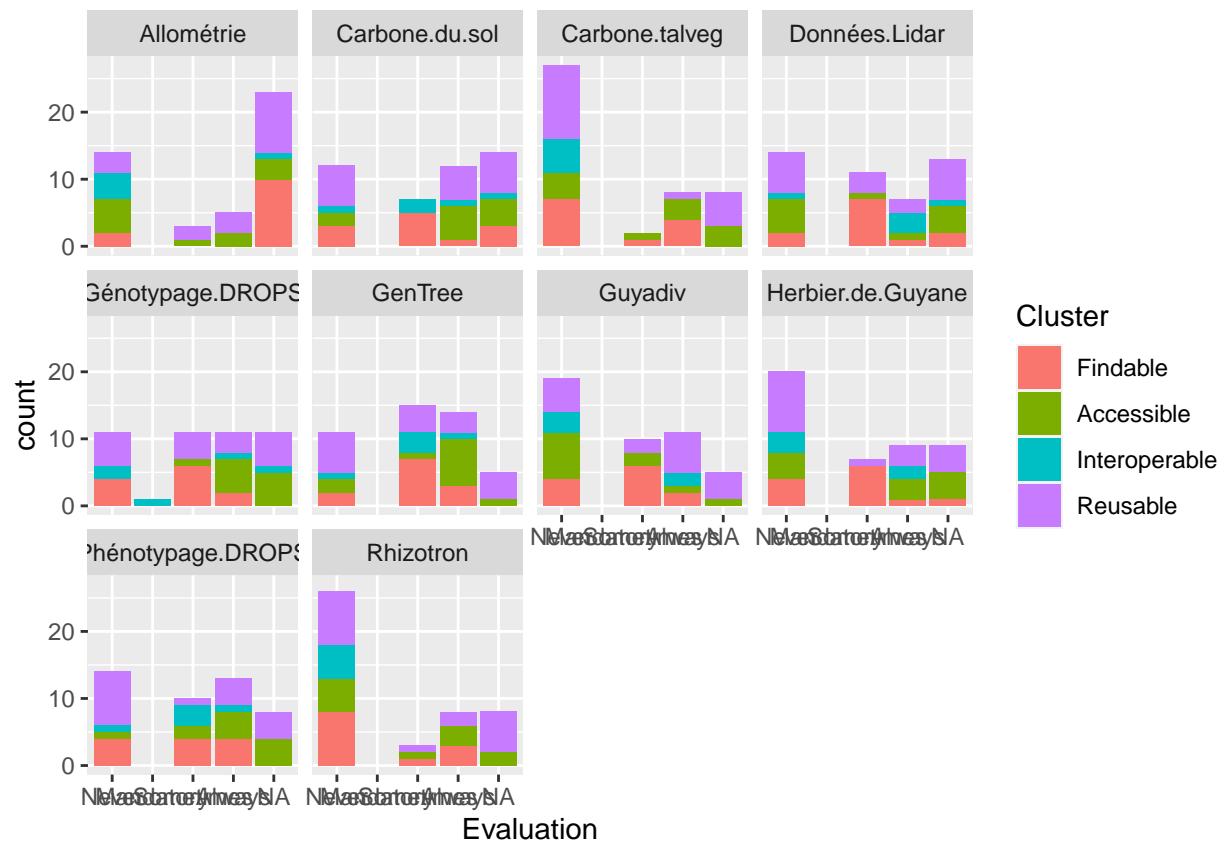

```
data_narrow %>%
  ggplot(aes(x = Evaluation)) + geom_bar() + facet_wrap(~ Name)
```

