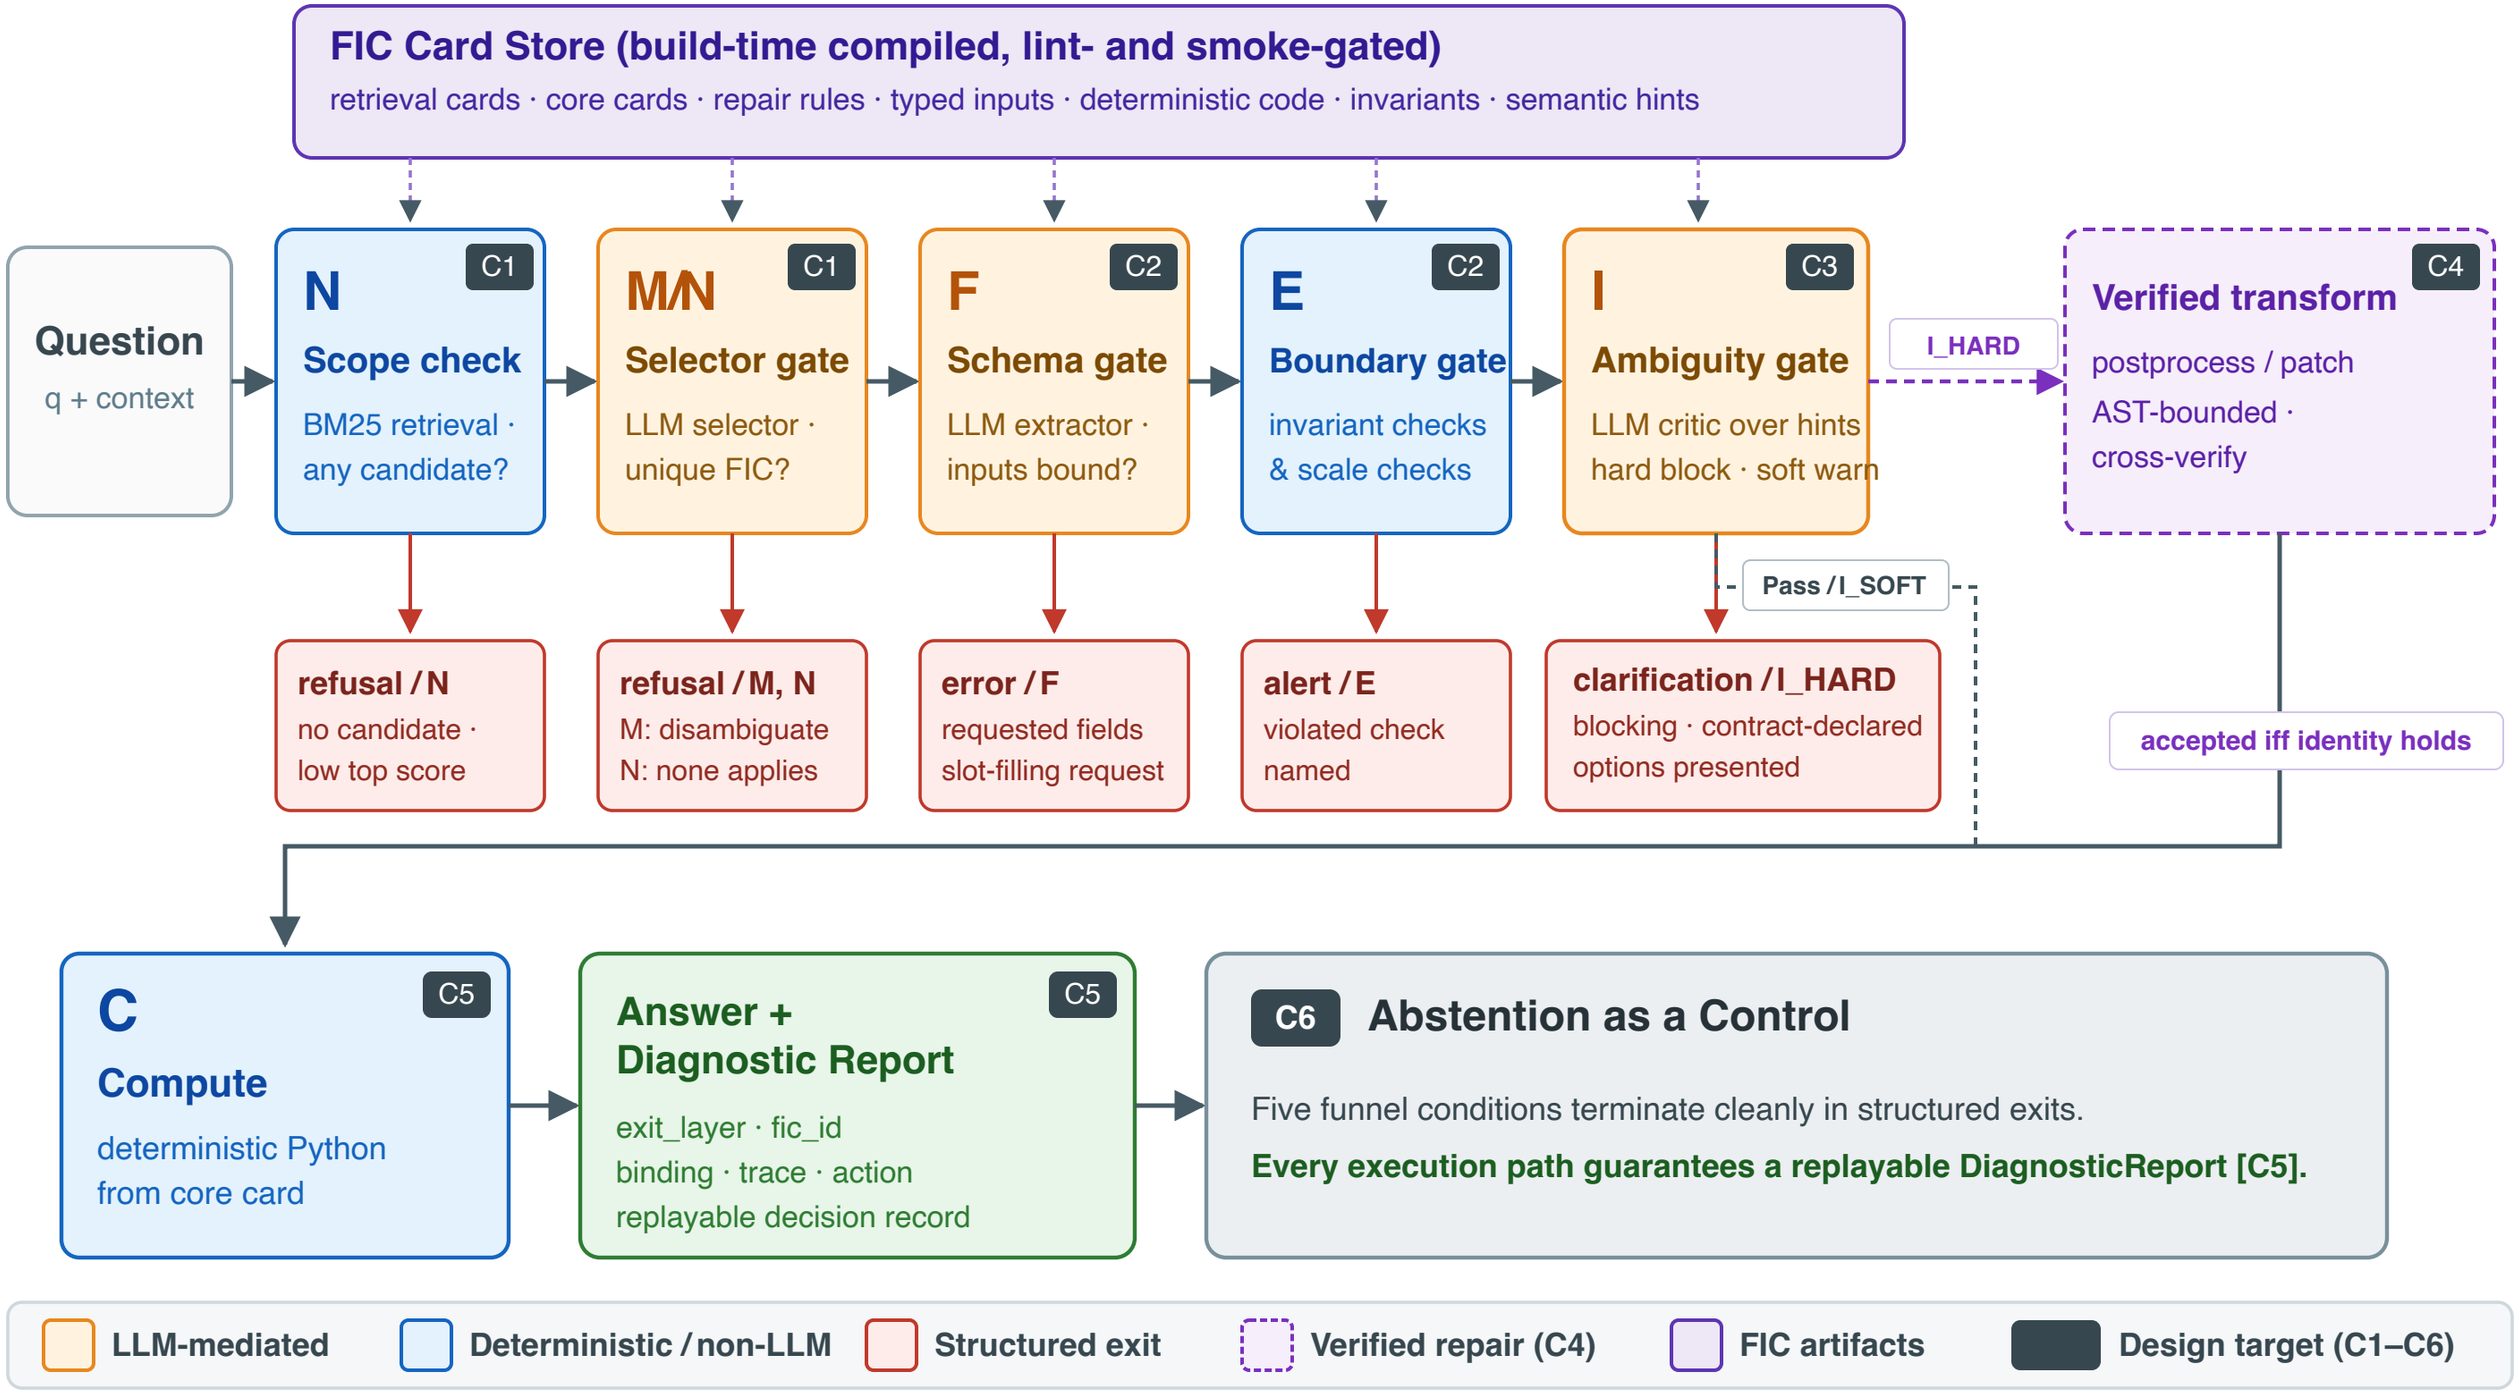

FIC Card Store (build-time compiled, lint- and smoke-gated)
retrieval cards · core cards · repair rules · typed inputs · deterministic code · invariants · semantic hints
Question
q + context
N
C1
Scope check
BM25 retrieval · any candidate?
M/N
C1
Selector gate
LLM selector · unique FIC?
F
C2
Schema gate
LLM extractor · inputs bound?
E
C2
Boundary gate
invariant checks & scale checks
I
C3
Ambiguity gate
LLM critic over hints hard block · soft warn
I_HARD
Verified transform
C4
postprocess / patch
AST-bounded · cross-verify
refusal / N
no candidate · low top score
refusal / M, N
M: disambiguate
N: none applies
error / F
requested fields slot-filling request
alert / E
violated check named
clarification / I_HARD
blocking · contract-declared options presented
Pass / I_SOFT
accepted iff identity holds
C
C5
Compute
deterministic Python from core card
Answer + Diagnostic Report
C5
exit_layer · fic_id
binding · trace · action
replayable decision record
C6 Abstention as a Control
Five funnel conditions terminate cleanly in structured exits.
Every execution path guarantees a replayable DiagnosticReport [C5].
LLM-mediated
Deterministic / non-LLM
Structured exit
Verified repair (C4)
FIC artifacts
Design target (C1–C6)