


# Braze sGTM Proxy Client — Setup Documentation

*Thank you for purchasing the sGTM Client Template for Braze™ Proxying!*

*This document contains the step-by-step documentation to successfully import, configure, and integrate the template into your server-side Google Tag Manager setup and frontend environment.*


## Step 1 — Import the Template into sGTM

- In your Google Tag Manager Server Container, navigate to Templates on the left-hand menu.
- In the Client Templates section, click the New button.
- Click the three vertical dots (top-right contextual menu) and select Import.
- Choose the downloaded file: **custom-client-braze-proxy.tpl**
- Click Save in the top right corner and close the template editor panel.

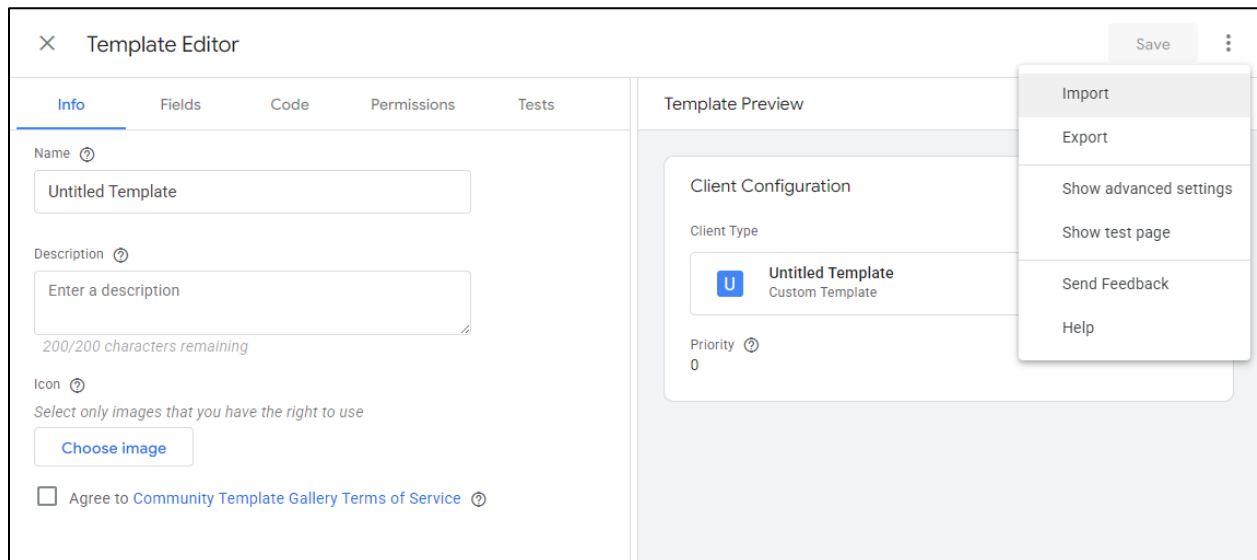


## Step 2 — Create and Configure the Client

- Navigate to Clients in the left-hand menu and click New.
- Click on Client Configuration and select your newly imported Braze Proxy Client.

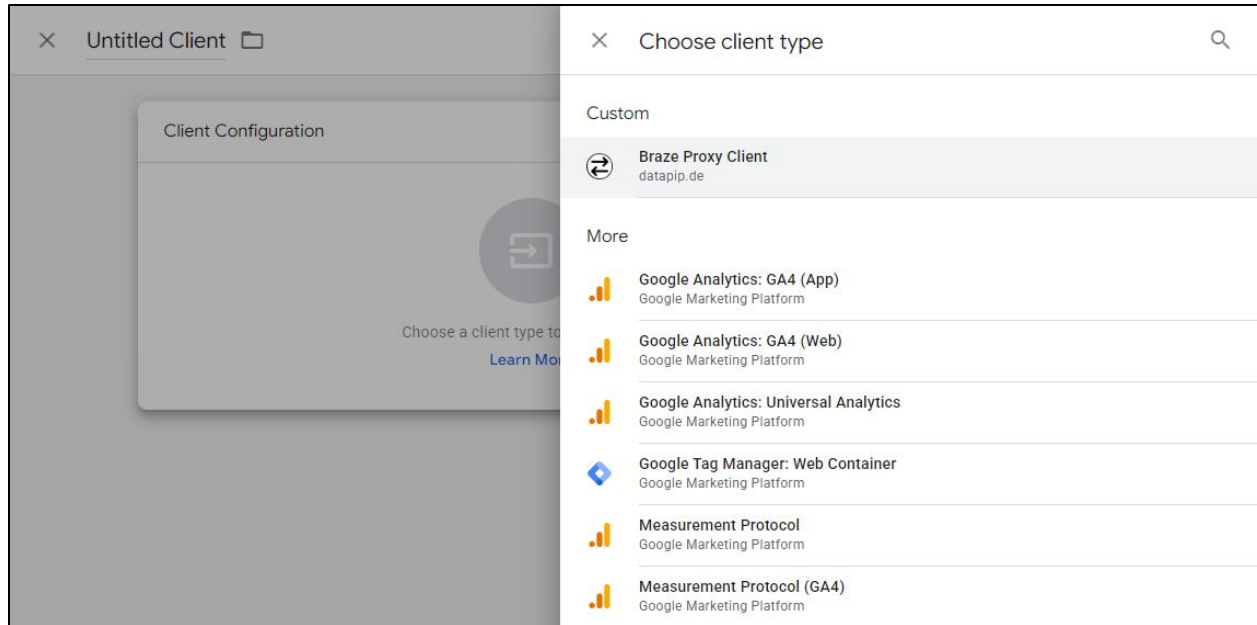

- API Endpoint: Enter your project-specific Braze SDK endpoint (e.g., <https://sdk.ex-01.braze.eu>). You can locate this string in your Braze Dashboard under *Settings > App Settings > SDK Endpoint*.
- Allowed API Keys (Recommended): Enter your authorized Braze Web API key(s) to strictly secure your infrastructure endpoint against unauthorized proxy use. You can locate this string in your Braze Dashboard under *Settings > App Settings > API Key*.
- Allowed Origins: Specify your allowed website domains (e.g., <https://www.yourdomain.com>). Note: Ensure there is no trailing slash at the end of the URL string.
- Assign a recognizable name to the client (e.g., Braze Proxy) and click Save.

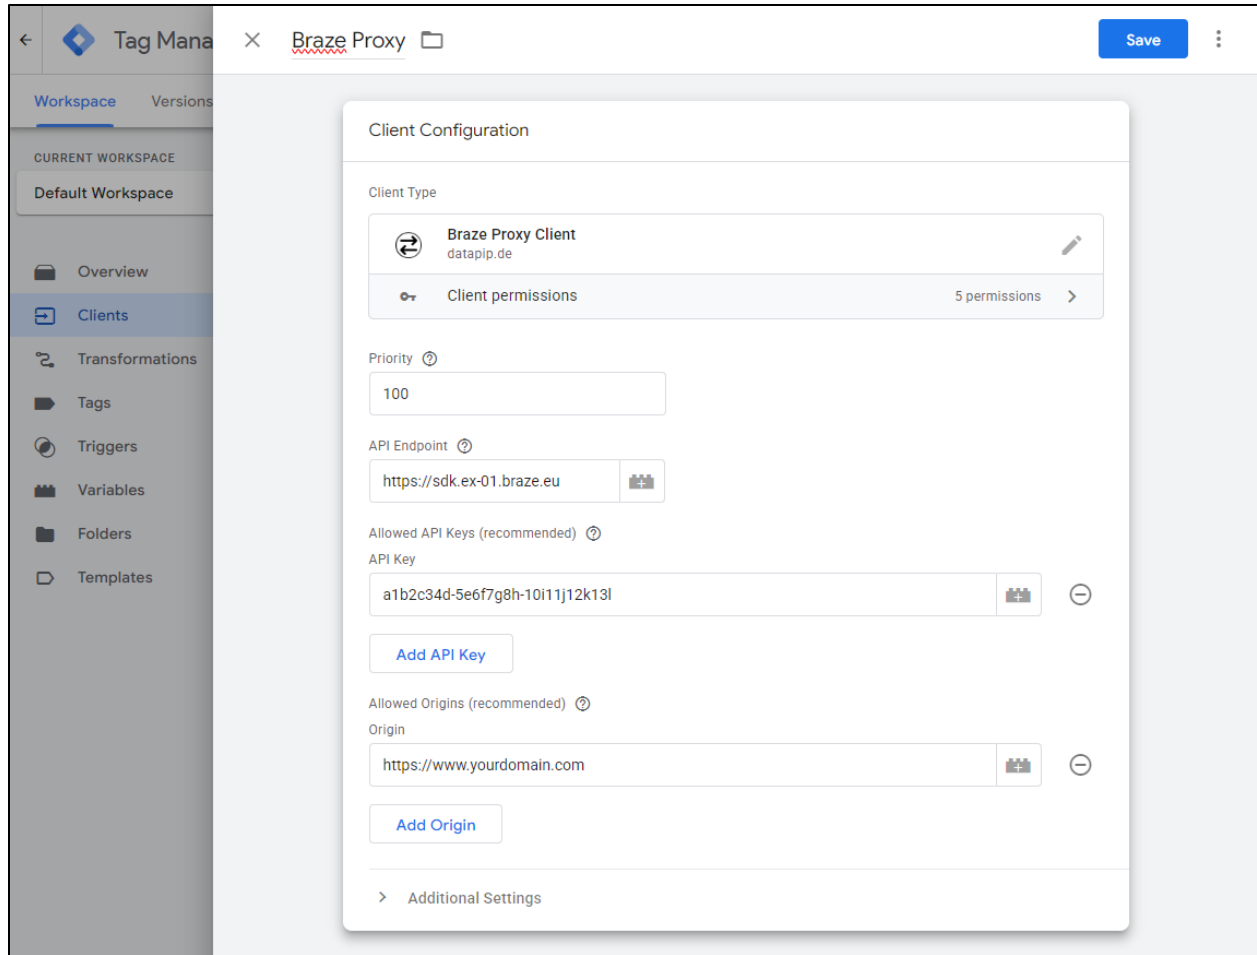

## Step 3 — Update your Website Integration

To actively route your frontend tracking traffic completely through your server-side container infrastructure, see the two code alterations below.

 Instead of adding the code snippets below manually, you can use the free companion [Braze Initialization Tag \(First-Party Domain\)](#) tag available in the Google Tag Manager Community Template Gallery. Just search for “Braze Initialization Tag with First-Party Domain”.

### 1. Load the Web SDK

Follow the documentation on how to install the Braze library via Braze CDN as described here: [https://www.braze.com/docs/developer\\_guide/sdk\\_integration](https://www.braze.com/docs/developer_guide/sdk_integration). Adjust the script src attribute to pull the minified library file straight from your own sGTM tracking instance domain wrapper instead of the standard public vendor CDN asset:

```
<script type="text/javascript">
  +function(a,p,P,b,y){a.braze={};a.brazeQueue=[] ... // Note: this code is shortened
    y.src='https://data.yourdomain.com/web-sdk/6.7/braze.min.js';
    y.async=1;(b=p.getElementsByTagName(P)[0]).parentNode.insertBefore(y,b)
  }(window,document,'script');
</script>
```

## 2. Initialize the Braze Web SDK

Point the baseline URL property directly to your custom sGTM domain environment:

```
braze.initialize("YOUR-API-KEY", {
  baseUrl: "https://data.yourdomain.com",
  // All other initialization options remain completely unchanged
});
```

## License, Warranty & Liability Disclaimer

- Notice: Unofficial community integration. Not affiliated with or endorsed by Braze, Inc. Braze™ is a trademark of Braze, Inc.
- License: Single-company license. Sharing, redistribution, or resale outside of the purchasing entity is strictly prohibited.
- B2B Only: This product is intended exclusively for commercial entities (B2B). By purchasing, you confirm that you are acting as a business, freelancer, or legal entity.
- Warranty & Liability: Sold strictly "as-is" without guaranteed future API updates. Implementation and use are entirely at your own risk. The author assumes no liability for data loss, tracking disruptions, or financial damages.