DataPsych Annotation Widget – Annotators Guide

This is a step-by-step guide for annotators using DataBricks. Before using the tool, the person coordinating annotation efforts should have shared a DataBricks Workspace folder containing the annotation tool. This guide steps through how to access and run this tool in DataBricks, as well as how to use the tool for annotations.

Running the tool

Once you have opened DataBricks in a browser window, click “Workspace” as shown below.

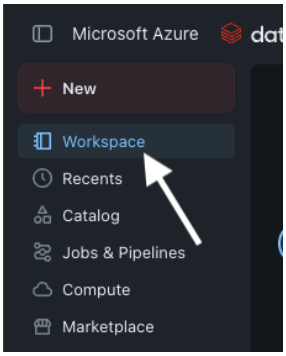

Open the tool

Within “Workspace”, you should see a file browser. Navigate to the annotation folder previously shared with you (if shared recently, you should be able to find it under “Shared with me”). This folder should contain a Notebook called “annotation”, as shown below. Click on this Notebook.

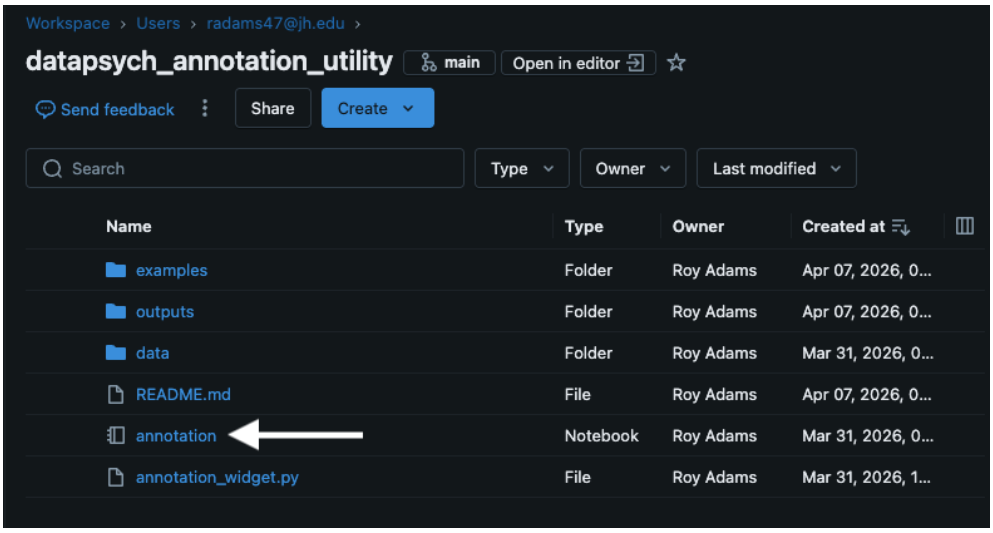

Connect to “Compute”

Before you can run the tool, you must connect to a “Compute” resource. To do this, select the dropdown menu shown below and click “Serverless”.

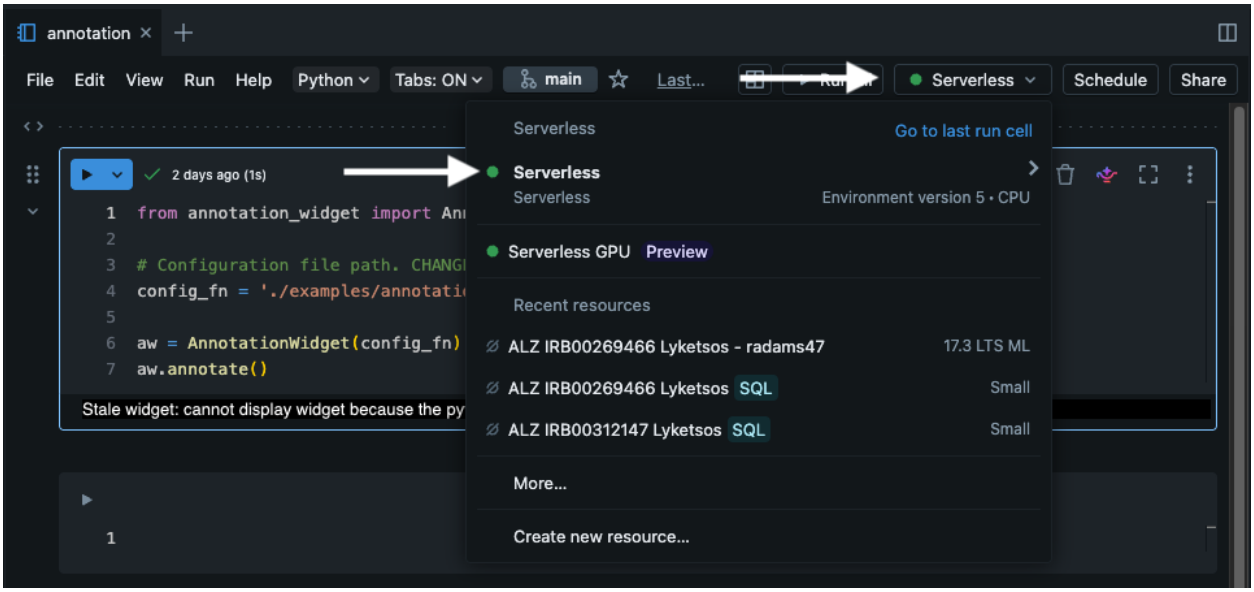

Click “Run all”

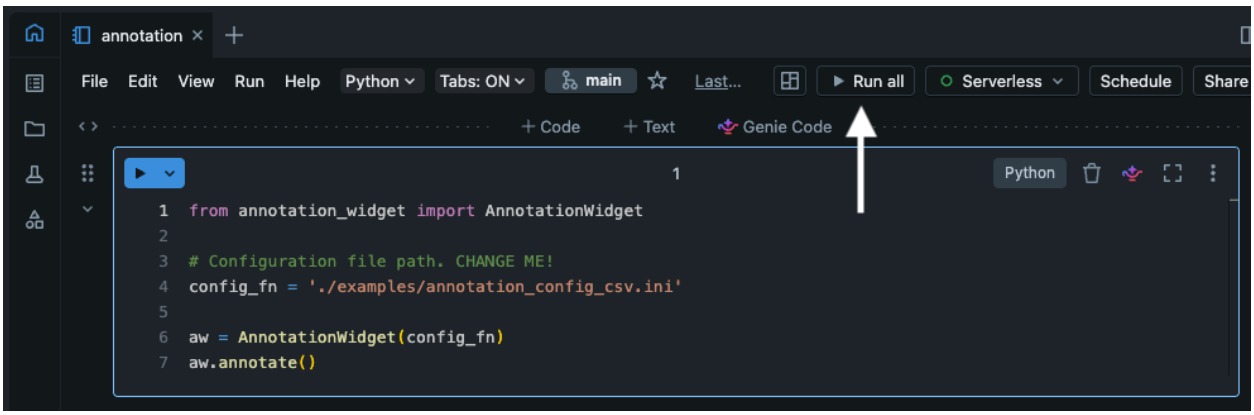

Select your name from the “Annotator” dropdown

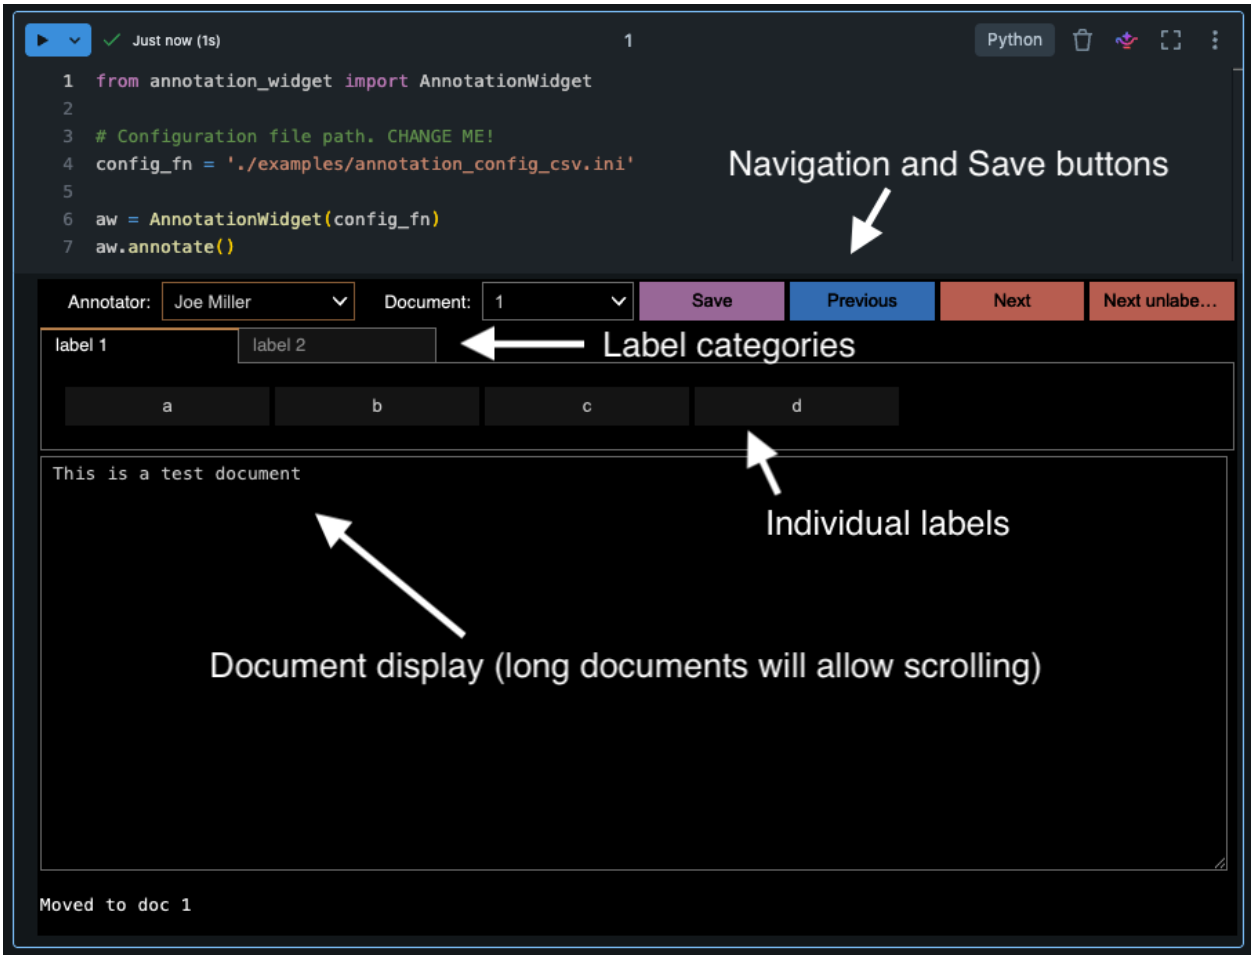

Begin annotation!

Once an annotator is selected, the widget will load the first document assigned to that annotator. Additionally, if annotations were previously saved for that annotator, they will also be loaded and displayed.

Navigating between documents can be done using the “Document” dropdown or the navigation buttons next to it. The Previous/Next buttons will move one document backward/forward whereas the “Next unlabeled” button will advance to the first document with no saved labels.

Annotations can be entered in the annotations tabs directly below the navigation buttons. Each tab will correspond to a separate label or group of labels. The specifics of the annotations assigned will depend on your specific project.

Saving annotations can be done using the Save button, which will write to an annotations file in a shared location. Additionally, annotations for a document are automatically saved when navigating to another document.