

PROGRAMACIÓN 2

MasterSEO
by BIGSEO

TU CAM

PROGRAMACIÓN 2

MasterSEO
by BIGSEO

ÍNDICE

Breadcrumbs

Rich Snippets

Redirecciones

Ajax

CSS Avanzado

CSS Sprite

CSS Mediaquery

TU CAM

BREADCRUMBS

Breadcrumbs

¿Qué es Breadcrumb?

- También llamada navegación miga de pan
- Es una navegación secundaria dentro de una web
- Muestra una ruta lógica desde la página principal hasta la posición de navegación actual

Son importantes para SEO ya que mejoran la usabilidad y el enlazado interno de la página

Mujer > Outlet > Ropa > Vestidos > Vestidos de fiesta

```
<div class="_4qWUe8 w5w9i_1_QGWg"> == $0
  <nav aria-label="Breadcrumb">
    <ul class="_0xLoFW FCIPrz _4oK5GO _MmCDa heWLCX">
      <li class="_0xLoFW FCIPrz">_</li>
      <li class="_0xLoFW FCIPrz">_</li>
      <li class="_0xLoFW FCIPrz">_</li>
      <li class="_0xLoFW FCIPrz">_</li>
      <li class="_7Cm1F9 ka2E9k uMhVZi dgII7d _0xLoFW D--idb iSVqgF" aria-current="page">Vestidos de
        fiesta</li>
    </ul>
  </nav>
</div>
```

TU CAM

RICH SNIPPETS

Rich Snippets

¿Qué son los Rich Snippets?

- Fragmentos de código HTML que expresa la función de los elementos dentro de una página web Los motores de búsqueda los entienden y pueden clasificar mejor estos contenidos
- Algunos ejemplos de etiquetado pueden ser autores, valoraciones, eventos, productos, etc.

Un resultado del buscador con Rich Snippet llamará más la atención.

Product

A Schema.org Type

Thing > Product

[more...]

Any offered product or service. For example: a pair of shoes; a concert ticket; the rental of a car; a haircut; or an episode of a TV show streamed online.

Property	Expected Type	Description
Properties from Product		
additionalProperty	PropertyValue	A property-value pair representing an additional characteristics of the entity, e.g. a product feature or another characteristic for which there is no matching property in schema.org. Note: Publishers should be aware that applications designed to use specific schema.org properties (e.g. https://schema.org/width , https://schema.org/color , https://schema.org/gtin13 , ...) will typically expect such data to be provided using those properties, rather than using the generic property/value mechanism.
aggregateRating	AggregateRating	The overall rating, based on a collection of reviews or ratings, of the item.
audience	Audience	An intended audience, i.e. a group for whom something was created. Supersedes serviceAudience.
award	Text	An award won by or for this item. Supersedes awards.
brand	Brand or Organization	The brand(s) associated with a product or service, or the brand(s) maintained by an organization or business person.
category	PhysicalActivityCategory or Text or Thing or URL	A category for the item. Greater signs or slashes can be used to informally indicate a category hierarchy.
color	Text	The color of the product.
countryOfAssembly	Text	The place where the product was assembled.
countryOfLastProcessing	Text	The place where the item (typically Product) was last processed and tested before importation.

<https://schema.org/Product>

TU CAM

Rich Snippets

¿Cómo se utilizan?

Existen 3 formas para implementar los Rich Snippets:

- Microdatos: Atributos en etiquetas HTML:

```
<div itemscope itemtype="https://schema.org/Movie">
  <h1 itemprop="name">Avatar</h1>
  <div itemprop="director" itemscope itemtype="https://schema.org/Person">
    Director: <span itemprop="name">James Cameron</span> (born <span itemprop="birthDate">August 16, 1954</span>)
  </div>
  <span itemprop="genre">Science fiction</span>
  <a href="../../movies/avatar-theatrical-trailer.html" itemprop="trailer">Trailer</a>
</div>
```

https://schema.org/docs/gs.html#microdata_why

TU CAM

Rich Snippets

¿Cómo se utilizan?

- RDFa: Extensión de etiquetas HTML5:

```
<div xmlns:dc="http://purl.org/dc/elements/1.1/"  
  about="http://www.example.com/books/wikinomics">  
  <span property="dc:title">Wikinomics</span>  
  <span property="dc:creator">Don Tapscott</span>  
  <span property="dc:date">2006-10-01</span>  
</div>
```

<https://en.wikipedia.org/wiki/RDFa>

TU CAM

Rich Snippets

¿Cómo se utilizan?

JSON-LD: Recomendada por Google.
Script de un objeto JSON con datos a catalogar como Rich Snippets.

```
<script type="application/ld+json">{
  "@context": "http://schema.org",
  "@type": "Movie",
  "name": "Movie Name",
  "dateCreated": "17 May, 1980",
  "director": "Donald Trump",
  "actors": ["ActorOne", "ActorTwo", "ActorThree"],
  "image": "http://example.com/image/movie.pgn",
  "countryOfOrigin": "America",
  "duration": "2:10:20",
  "musicBy": "Awesome Band",
  "productionCompany": "Awesome Movies inc.",
  "subtitleLanguage": "en, nb",
  "trailer": {
    "@type": "VideoObject",
    "name": "Official Trailer WAtW!",
    "description": "Trailer for the awesome new movieWigs Around the World!",
    "thumbnailUrl": "http://examples.com/thumbnail.png",
    "uploadDate": "10 May 1980"
  }
}</script>
```

TU CAM

Rich Snippets

Ejemplos

https://linkiafp.es ▼
Linkia FP - Formación Profesional Oficial a Distancia
Linkia FP te ofrece la mejor Formación Profesional estés donde estés. ... y **cursos** especializados Para completar tu desarrollo profesional, **Linkia** FP pone a ...
Ciclos Formativos a Distancia · Grado Superior · Ver todos los cursos · LinkiaFP

https://www.lecturas.com › recetas › postres ▼
Recetas de postres fáciles - Lecturas
Desde la clásica tarta de galletas, a vasitos de frutas con un toque diferente, un pastel de queso o el típico flan casero. Mira todas las **recetas de postres** ...
★★★★★ Valoración: 4 · 176 reseñas · 45 min

TU CAM

Rich Snippets

Validador: <https://validator.schema.org/#url=https%3A%2F%2Flinkiafp.es%2F>

<https://linkiafp.es/>
NUEVA PRUEBA

```

89 <iframe src="https://www.googletagmanager.com/ns.html?id=GTM-KLXWZ7T"
90 height="0" width="0" style="display:none;visibility:hidden">
91 </iframe>
92 </noscript>
93 <!-- End Google Tag Manager (noscript) -->
94 <script type="application/ld+json">
95 [
96 {
97   "@context": "http://schema.org",
98   "@type": "Organization",
99   "name": "Linkia Talentia SL",
100  "url": "https://linkiafp.es/",
101  "logo": "https://linkiafp.es/app/uploads/2021/06/LOGOFONTALblanco.png",
102  "sameAs": ["https://www.facebook.com/LinkiaFP/", "https://twitter.com/linkiafp", "https://www.linkedin.com/school/linkiafp/"],
103  "telephone": "900 67 02 02",
104  "email": "info@linkiafp.es"
105 },
106 {
107   "@context": "http://schema.org",
108   "@type": "WebSite",
109   "name": "Linkia Talentia SL",
110   "url": "https://linkiafp.es/"
111 }
112 ]
113 </script>
114 <header id="header">
115 <div class="action-caller row no-gutters">
116   <div class="col-12">
117     <div class="line-border"></div>
118   </div>
119 </div>
120 <a name="header"></a>
121 <div class="searchbar-container row no-gutters">
122   <div class="col-lg-4 col-md-3 col-sm-5 col-5">
123     <div class="company-logo">
124       <a href="https://linkiafp.es/">
125         
<html>
<body>

<div id="demo">
<h2>The XMLHttpRequest Object</h2>
<button type="button" onclick="loadDoc()">Change
Content</button>
</div>

<script>
function loadDoc() {
  const xhttp = new XMLHttpRequest();
  xhttp.onload = function() {
    document.getElementById("demo").innerHTML =
      this.responseText;
  }
  xhttp.open("GET", "ajax_info.txt");
  xhttp.send();
}
</script>

</body>
</html>
```

The XMLHttpRequest Object

Change Content

AJAX

AJAX is not a programming language.

AJAX is a technique for accessing web servers from a web page.

AJAX stands for Asynchronous JavaScript And XML.

← → ↻ 🔒 w3schools.com/js/ajax_info.txt

```
<h1>AJAX</h1>
<p>AJAX is not a programming language.</p>
<p>AJAX is a technique for accessing web servers from a web page.</p>
<p>AJAX stands for Asynchronous JavaScript And XML.</p>
```

TU CAM

https://www.w3schools.com/js/tryit.asp?filename=tryjs_ajax_first

Ajax

Estados:

Property	Description
onreadystatechange	Defines a function to be called when the readyState property changes
readyState	Holds the status of the XMLHttpRequest. 0: request not initialized 1: server connection established 2: request received 3: processing request 4: request finished and response is ready
status	200: "OK" 403: "Forbidden" 404: "Page not found" For a complete list go to the Http Messages Reference
statusText	Returns the status-text (e.g. "OK" or "Not Found")

https://www.w3schools.com/xml/ajax_xmlhttprequest_response.asp

TU CAM

Ajax

Ejemplo:

```
function loadDoc() {  
    var xhttp = new XMLHttpRequest();  
    xhttp.onreadystatechange = function() {  
        if (this.readyState == 4 && this.status == 200) {  
            document.getElementById("demo").innerHTML =  
                this.responseText;  
        }  
    };  
    xhttp.open("GET", "ajax_info.txt", true);  
    xhttp.send();  
}
```

TU CAM

https://www.w3schools.com/xml/tryit.asp?filename=tryajax_first

Ajax

Ejemplo:



```
<?xml version="1.0" encoding="utf-8"?>
<CATALOG>
  <CD>
    <TITLE>Empire Burlesque</TITLE>
    <ARTIST>Bob Dylan</ARTIST>
    <COUNTRY>USA</COUNTRY>
    <COMPANY>Columbia</COMPANY>
    <PRICE>10.90</PRICE>
    <YEAR>1985</YEAR>
  </CD>
  <CD>
    <TITLE>Hide your heart</TITLE>
    <ARTIST>Bonnie Tyler</ARTIST>
    <COUNTRY>UK</COUNTRY>
    <COMPANY>CBS Records</COMPANY>
    <PRICE>9.90</PRICE>
    <YEAR>1988</YEAR>
  </CD>
</CATALOG>
```

TU CAM

Ajax

Ejemplo:

```
<!DOCTYPE html>
<html>
<body>

<h1>The XMLHttpRequest Object</h1>

<p id="demo"></p>

<script>
var xhttp, xmlDoc, txt, x, i;
xhttp = new XMLHttpRequest();
xhttp.onreadystatechange = function() {
if (this.readyState == 4 && this.status == 200) {
  xmlDoc = this.responseXML;
  txt = "";
  x = xmlDoc.getElementsByTagName("ARTIST");
  for (i = 0; i < x.length; i++) {
    txt = txt + x[i].childNodes[0].nodeValue + "<br>";
  }
  document.getElementById("demo").innerHTML = txt;
}
};
xhttp.open("GET", "cd_catalog.xml", true);
xhttp.send();
</script>

</body>
</html>
```

The XMLHttpRequest Object

Bob Dylan
Bonnie Tyler
Dolly Parton
Gary Moore
Eros Ramazzotti
Bee Gees
Dr.Hook
Rod Stewart
Andrea Bocelli
Percy Sledge
Savage Rose
Many
Kenny Rogers
Will Smith
Van Morrison
Jorn Hoel
Cat Stevens
Sam Brown
T'Pau
Tina Turner
Kim Larsen
Luciano Pavarotti
Otis Redding
Simply Red
The Communards
Joe Cocker

TU CAM

https://www.w3schools.com/xml/tryit.asp?filename=tryajax_responsexml

Ajax

Ejemplo:

```
<h1>The XMLHttpRequest Object</h1>

<form action="">
<select name="customers" onchange="showCustomer(this.value)">
<option value="">Select a customer:</option>
<option value="ALFKI">Alfreds Futterkiste</option>
<option value="NORTS ">North/South</option>
<option value="WOLZA">Wolski Zajazd</option>
</select>
</form>
<br>
<div id="txtHint">Customer info will be listed here...</div>

<script>
function showCustomer(str) {
  var xhttp;
  if (str == "") {
    document.getElementById("txtHint").innerHTML = "";
    return;
  }
  xhttp = new XMLHttpRequest();
  xhttp.onreadystatechange = function() {
    if (this.readyState == 4 && this.status == 200) {
      document.getElementById("txtHint").innerHTML = this.responseText;
    }
  };
  xhttp.open("GET", "getcustomer.php?q="+str, true);
  xhttp.send();
}
</script>
```

https://www.w3schools.com/xml/tryit.asp?filename=tryajax_database

TU CAM

Ajax

Ejemplo:

```
<?php
$mysqli = new mysqli("servername", "username", "password", "dbname");
if($mysqli->connect_error) {
    exit('Could not connect');
}

$sql = "SELECT customerid, companyname, contactname, address, city,
postalcode, country
FROM customers WHERE customerid = ?";

$stmt = $mysqli->prepare($sql);
$stmt->bind_param("s", $_GET['q']);
$stmt->execute();
$stmt->store_result();
$stmt->bind_result($cid, $cname, $name, $adr, $city, $pcode, $country);
$stmt->fetch();
$stmt->close();
```

```
echo "<table>";
echo "<tr>";
echo "<th>CustomerID</th>";
echo "<td>" . $cid . "</td>";
echo "<th>CompanyName</th>";
echo "<td>" . $cname . "</td>";
echo "<th>ContactName</th>";
echo "<td>" . $name . "</td>";
echo "<th>Address</th>";
echo "<td>" . $adr . "</td>";
echo "<th>City</th>";
echo "<td>" . $city . "</td>";
echo "<th>PostalCode</th>";
echo "<td>" . $pcode . "</td>";
echo "<th>Country</th>";
echo "<td>" . $country . "</td>";
echo "</tr>";
echo "</table>";
?>
```

TU CAM

https://www.w3schools.com/xml/ajax_database.asp

Ajax

Ejemplo:

The XMLHttpRequest Object

Alfreds Futterkiste ▼

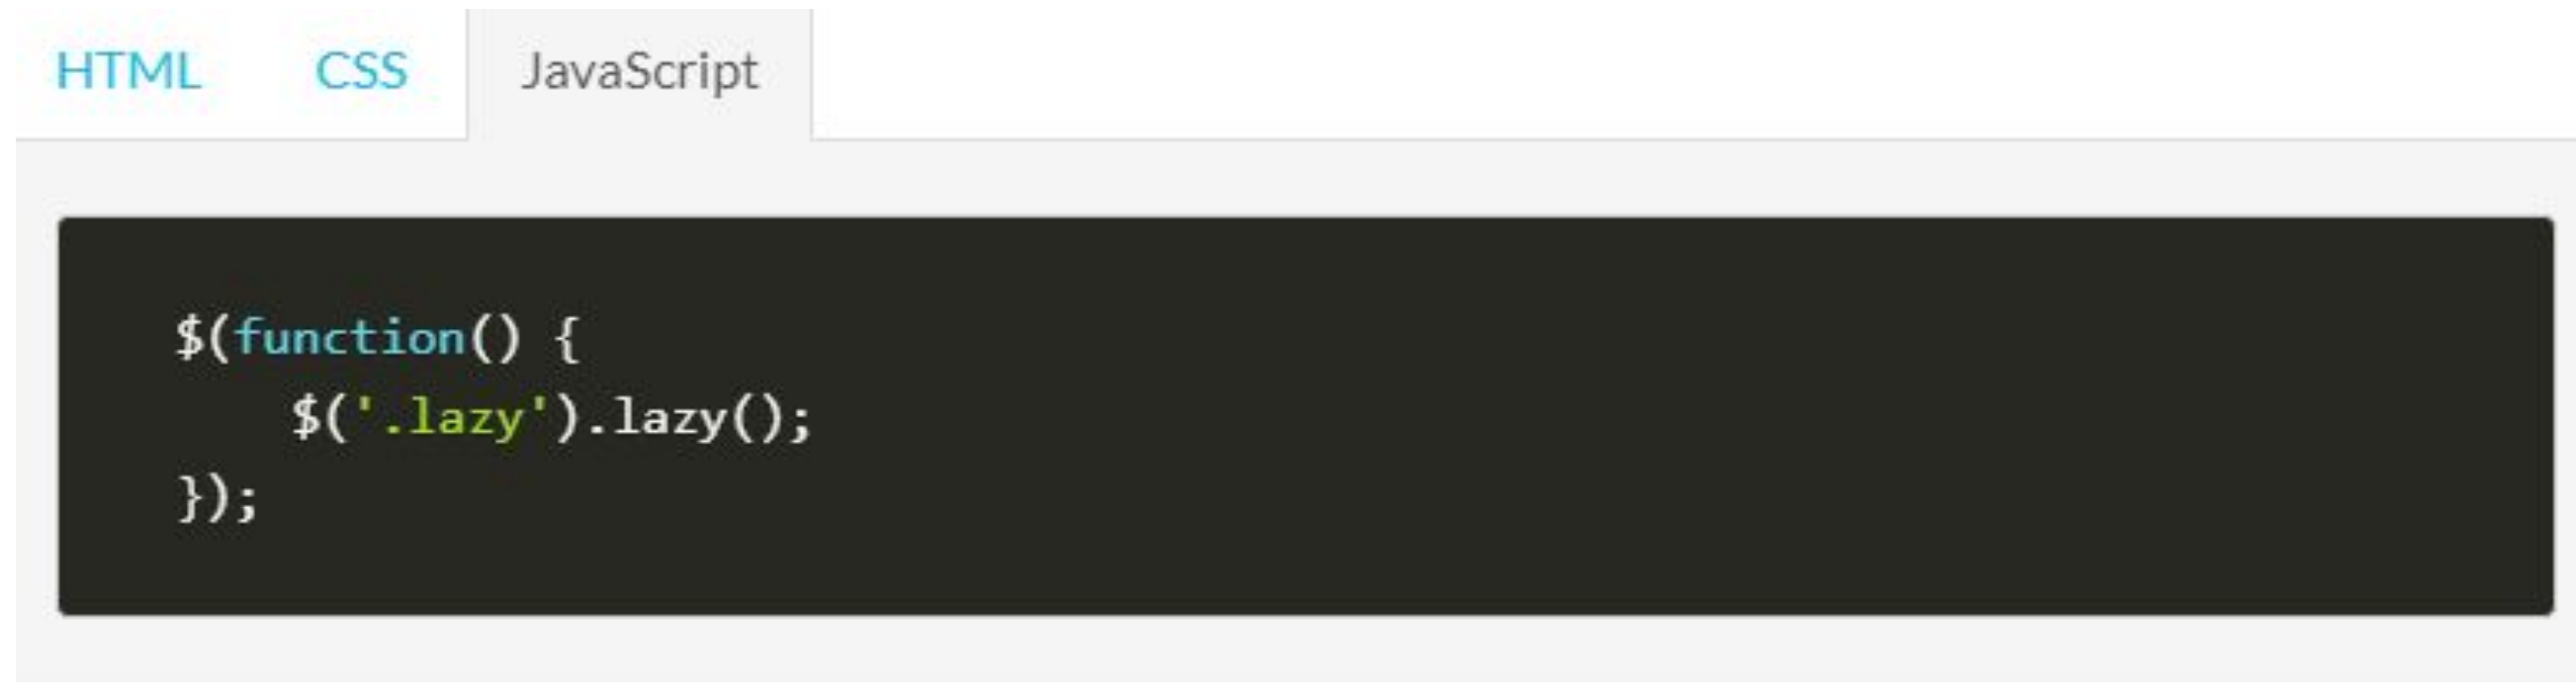
CustomerID	ALFKI
CompanyName	Alfreds Futterkiste
ContactName	Maria Anders
Address	Obere Str. 57
City	Berlin
PostalCode	12209
Country	Germany

https://www.w3schools.com/xml/tryit.asp?filename=tryajax_database

TU CAM

Ajax

Ejemplo jQuery Lazy:

A code editor interface with three tabs: HTML, CSS, and JavaScript. The JavaScript tab is selected and active. The code editor contains the following JavaScript code:

```
$(function() {  
    $('.lazy').lazy();  
});
```

http://jquery.eisbehr.de/lazy/example_basic-usage

TU CAM

CSS AVANZADO

CSS AVANZADO

CSS Sprite:

```
<ul class="navigation">
  <li id="facebook">
    <a href="#" title="Facebook"><span></span></a>
  </li>
  <li id="twitter">
    <a href="#" title="Twitter"><span></span></a>
  </li>
  <li id="pinterest">
    <a href="#" title="Pinterest"><span></span></a>
  </li>
  <li id="instagram">
    <a href="#" title="Instagram"><span></span></a>
  </li>
</ul>
```



```
.navigation{
position: static;
overflow: hidden;
padding-left: 35%;
padding-bottom: 20px;
}

.navigation li {
list-style-type:none;
float: left;
}

.navigation li a {
display:block;
}

.navigation span {
background:url(images/sprite_icons.png) no-repeat left top;
height:45px;
width: 45px;
display:-moz-inline-box;
display:inline-block;
vertical-align: middle;
}

#twitter span {
background-position: -53px 0;
}

#pinterest span {
background-position: -106px 0;
}

#instagram span {
background-position: -159px 0;
}

#facebook span:hover {
background-position: -0 -53px;
}

#twitter span:hover {
background-position: -53px -53px;
}

#pinterest span:hover {
background-position: -106px -53px;
}

#instagram span:hover {
background-position: -159px -53px;
}
```

TU CAM

CSS AVANZADO

Mediaquery:

```
/* Extra small devices (phones, 600px and down) */  
@media only screen and (max-width: 600px) {...}  
  
/* Small devices (portrait tablets and large phones, 600px and up) */  
@media only screen and (min-width: 600px) {...}  
  
/* Medium devices (landscape tablets, 768px and up) */  
@media only screen and (min-width: 768px) {...}  
  
/* Large devices (laptops/desktops, 992px and up) */  
@media only screen and (min-width: 992px) {...}  
  
/* Extra large devices (large laptops and desktops, 1200px and up) */  
@media only screen and (min-width: 1200px) {...}
```

https://www.w3schools.com/css/css_rwd_mediaqueries.asp

TU CAM

¡MUCHAS GRACIAS!

TU CAM