



FID

MasterSEO
by BIGSEO

TU CAM

FID

ÍNDICE

¿Qué es el FID?

¿Qué es un buen FID?

Preconnect

Preload

Prefetch

MasterSEO
by BIGSEO

TU CAM

¿QUÉ ES EL FID?

What is FID?

FID measures the time from when a user first interacts with a page (i.e. when they click a link, tap on a button, or use a custom, JavaScript-powered control) to the time when the browser is actually able to begin processing event handlers in response to that interaction.

FID

First Input Delay




¿QUÉ ES UN BUEN FID?


What is a good FID score?

To provide a good user experience, sites should strive to have a First Input Delay of **100 milliseconds** or less. To ensure you're hitting this target for most of your users, a good threshold to measure is the **75th percentile** of page loads, segmented across mobile and desktop devices.

TU CAM

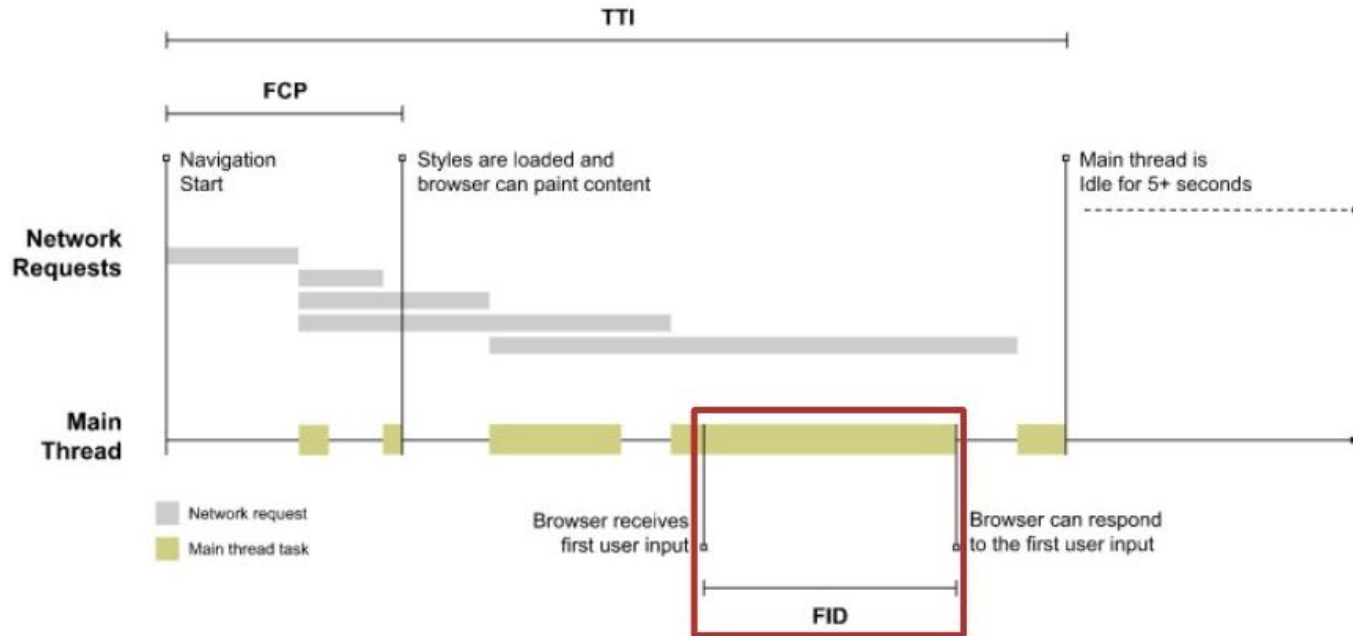

TU CAM

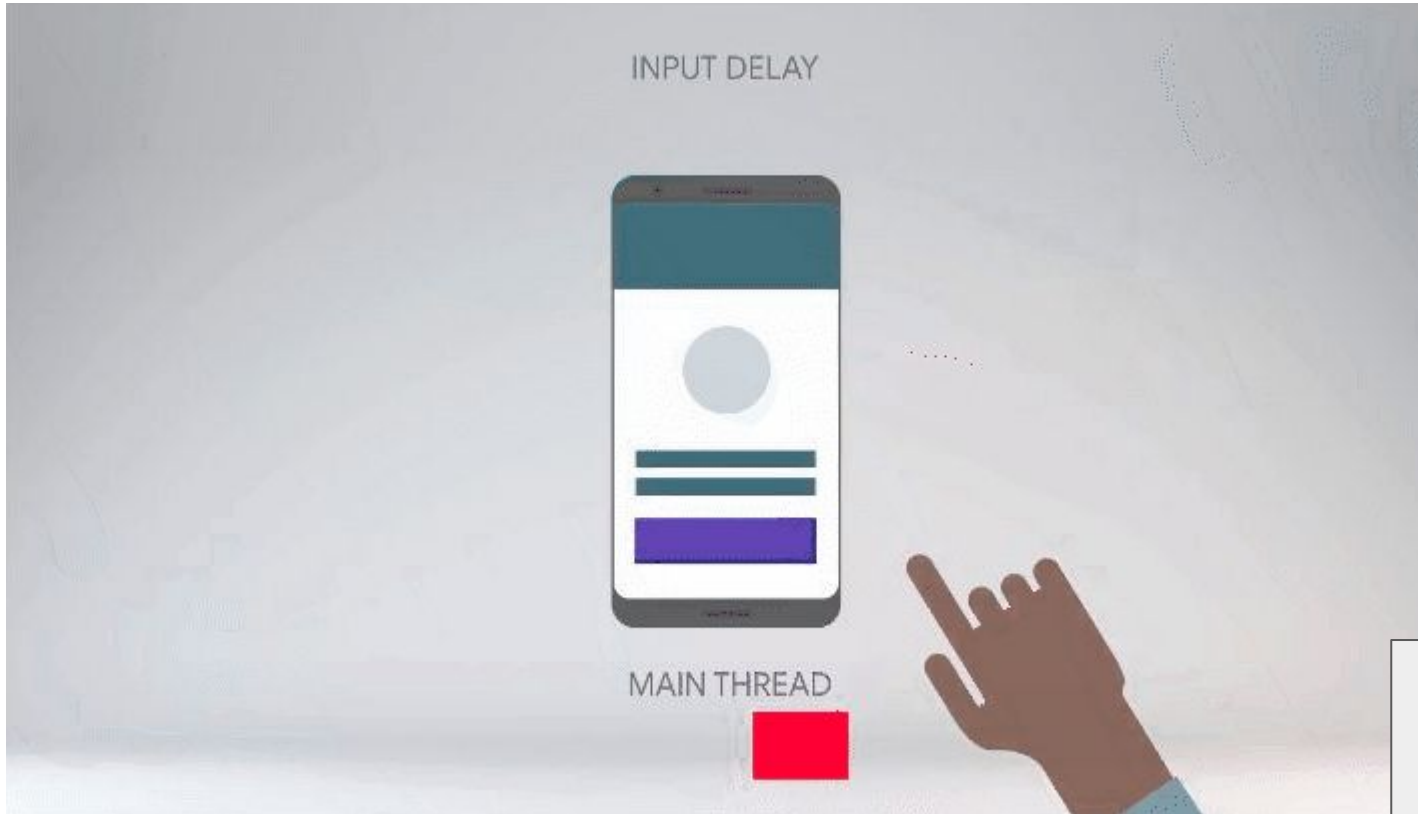

TU CAM

¿Qué **SÍ** cuenta como FID?


- Clics, pulsar botones...

¿Qué **NO** cuenta como FID?

- Scroll, zoom...

TU CAM

- ★ FID requires a real user and thus cannot be measured in the lab. However, the Total Blocking Time (TBT) metric is lab-measurable, correlates well with FID in the field, and also captures issues that affect interactivity. Optimizations that improve TBT in the lab should also improve FID for your users.

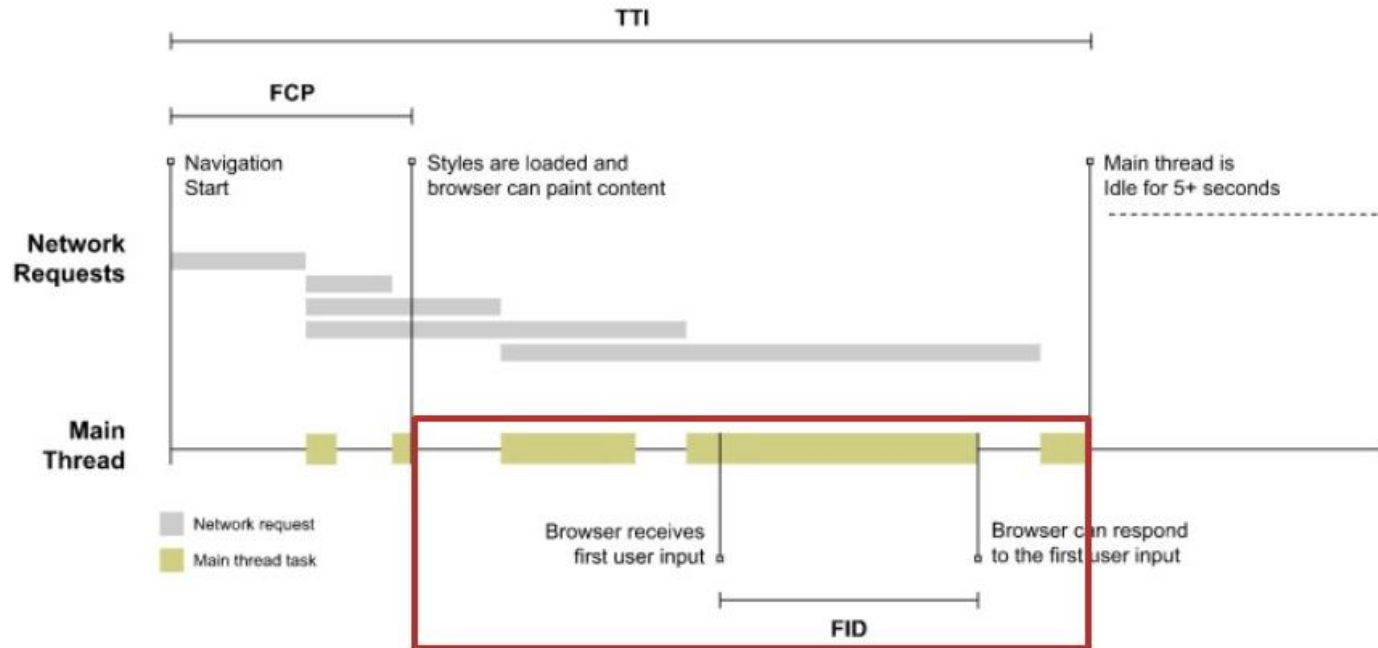

TBT (Total Blocking Time)

TU CAM

How to improve TBT

To learn how to improve TBT for a specific site, you can run a Lighthouse performance audit and pay attention to any specific [opportunities](#) the audit suggests.

To learn how to improve TBT in general (for any site), refer to the following performance guides:

- [Reduce the impact of third-party code](#)
- [Reduce JavaScript execution time](#)
- [Minimize main thread work](#)
- [Keep request counts low and transfer sizes small](#)

The screenshot shows a web browser displaying a product page for Martin Miller's Gin. The page includes a product image, a 'Comprar' button, and a section titled 'Te gustará saber que...' (You will like to know that...). The network tab in the developer tools is open, showing a list of requests. A red circle highlights the first request, 'main.js', which is a script file. The table below lists the network requests.

Name	Status	Type	Initiator	Size	Time	Waterfall
main.js	200	script	martin-millers-gin	12.9 kB	201 ms	
ld.js	200	script	martin-millers-gin	2.0 kB	71 ms	
algolia.dist.js	200	script	martin-millers-gin	10.6 kB	69 ms	
rev-cef6cea087438f584dba979ae795cd.header.dist.js	200	script	martin-millers-gin	21.4 kB	51 ms	
gpt.js	200	script	martin-millers-gin	6.7 kB	31 ms	
rev-cef6cea087438f584dba979ae795cd.commoncons.dist.js	200	script	martin-millers-gin	13.1 kB	31 ms	
rev-cef6cea087438f584dba979ae795cd.products.dist.js	200	script	martin-millers-gin	9.7 kB	30 ms	
rev-cef6cea087438f584dba979ae795cd.footer.dist.js	200	script	martin-millers-gin	19.6 kB	20 ms	
analytics.js	200	script	martin-millers-gin			

TU CAM

The image shows three sequential screenshots of the Chrome DevTools Network tab, illustrating how to block a specific request.

Screenshot 1: The address bar shows 'youtube'. The network timeline shows a request for 'www-widgetapi.js'. A red box highlights the '200' status code in the list, and another red box highlights the '200' status code in the details pane. A red arrow points from the first box to the second.

Screenshot 2: The context menu is open for the selected request. A red box highlights the 'Block request URL' option. A red arrow points from the '200' status code in the details pane to this option.

Screenshot 3: The request is now blocked. The status code in the details pane is '(blocked:devtools)'. A red arrow points from the 'Block request URL' option in the previous screenshot to this status.

TU CAM

The screenshot shows the Google Lighthouse Performance report for the URL `https://www.drinksco.es/gin/martin-millers-gin`. The overall performance score is 42, displayed in a red circle. The 'Performance' section lists several metrics:

Metric	Score
First Contentful Paint	2.3 s
Speed Index	5.3 s
Largest Contentful Paint	4.0 s
Time to Interactive	14.6 s
Total Blocking Time	1,900 ms
Cumulative Layout Shift	0

Below the metrics, a note states: "Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)"

A red arrow points from the 'Total Blocking Time' value (1,900 ms) to the 'Network request blocking' panel at the bottom of the page. This panel is titled 'Network request blocking' and contains a checkbox labeled 'Enable network request blocking' which is currently unchecked. Below the checkbox, three domains are listed with checkboxes next to them:

- ☒ www.youtube.com
- ☒ connect.facebook.net
- ☒ static.olark.com

TU CAM

> Destilados > Ginebra > Martin Miller's Gin > Martin Miller's Gin



Inglaterra

Martin Miller's Gin

Elements Console Sources Network Performance Memory Application Security Lighthouse AdBlock

13:56:29 - www.drinksco.es

https://www.drinksco.es/gin/martin-millers-gin

48

Performance

Metrics

First Contentful Paint	2.4 s	Time to Interactive	13.4 s
Speed Index	4.0 s	Total Blocking Time	1,470 ms
Largest Contentful Paint	3.8 s	Cumulative Layout Shift	0

Values are estimated and may vary. The [performance score](#) is calculated directly from these metrics. [See calculator.](#)

[View Original Trace](#)

Console Rendering Network conditions Network request blocking x

☒ Enable network request blocking


☒ www.youtube.com

☒ connect.facebook.net

☒ static.clark.com

TU CAM

<https://requestmap.herokuapp.com/>

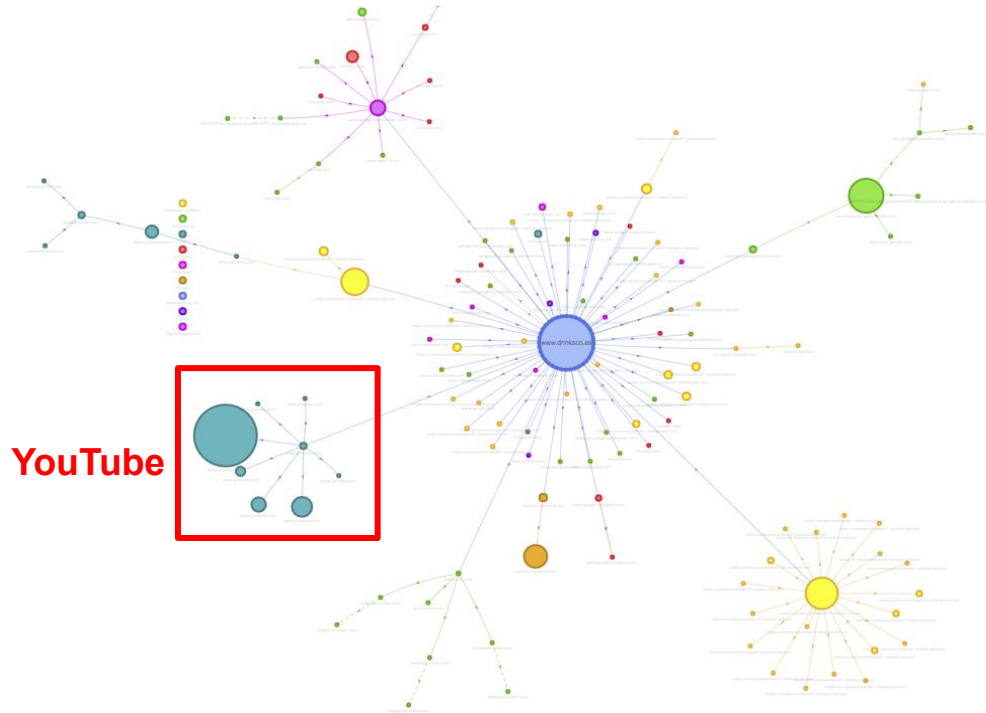

TU CAM

- Elimina lo innecesario
- Minifica
- Comprime
- Asincroniza

TU CAM



Pre* Party Resource Hints

Por Sam Perrow

Descargar

TU CAM

PRECONNECT

Pre* Party Plugin Settings

Insert Hints Settings Information

Bulk Actions ▾ Apply

11 elementos «

☐ URL	Hint Type	As Attr	Type Attr	Crossorigin	Media	Status
☐ https://ajax.googleapis.com	preconnect	-	-	-	-	enabled
☐ https://connect.facebook.net	preconnect	-	-	-	-	enabled
☐ https://fonts.googleapis.com	preconnect	-	-	crossorigin	-	enabled
☐ https://fonts.gstatic.com	preconnect	-	-	crossorigin	-	enabled
☐ https://maxcdn.bootstrapcdn.com	preconnect	-	-	-	-	enabled
☐ https://pagead2.googlesyndication.com	preconnect	-	-	-	-	enabled
☐ https://www.facebook.com	preconnect	-	-	-	-	enabled
☐ https://www.google-analytics.com	preconnect	-	-	-	-	enabled
☐ https://www.googletagmanager.com	preconnect	-	-	-	-	enabled
☐ https://www.gstatic.com	preconnect	-	-	-	-	enabled


TU CAM

Improve page load speed with preconnect


Consider adding `preconnect` or `dns-prefetch` resource hints to establish early connections to important third-party origins.

`<link rel="preconnect">` informs the browser that your page intends to establish a connection to another origin, and that you'd like the process to start as soon as possible.

Without preconnect

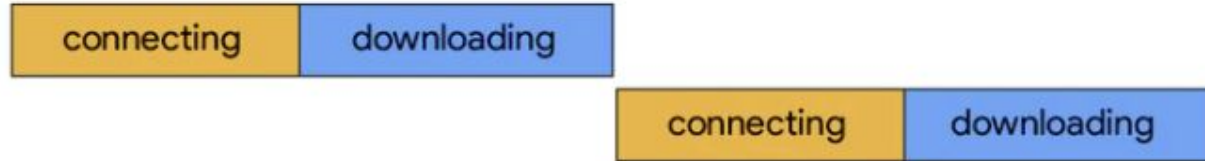

With preconnect

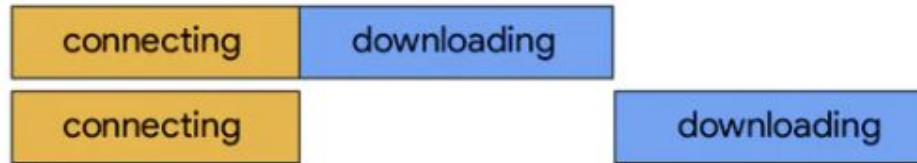

time

TU CAM

Update Resource Hint

? Domain or URL:

? DNS-Prefetch ☐ ? Prefetch ☐ ? Prerender ☐ ? Preconnect ☒ ? Precarga ☐

? Crossorigin? ☐ ? as:

Media Attribute ?

Insert domain names from external URL's
to perform DNS resolution, initial
connection, and SSL negotiation ahead of
time.

TU CAM

Datos de experimentos



■ First Contentful Paint	2,7 s
■ Speed Index	5,8 s
▲ Largest Contentful Paint ■	4,5 s

▲ Time to Interactive	13,5 s
▲ Total Blocking Time	2660 ms
● Cumulative Layout Shift ■	0,015

Datos de experimentos



■ First Contentful Paint	2,5 s
▲ Speed Index	6,0 s
▲ Largest Contentful Paint ■	4,4 s


▲ Time to Interactive	12,9 s
▲ Total Blocking Time	1340 ms
■ Cumulative Layout Shift ■	0,126

TU CAM



PRELOAD

TU CAM

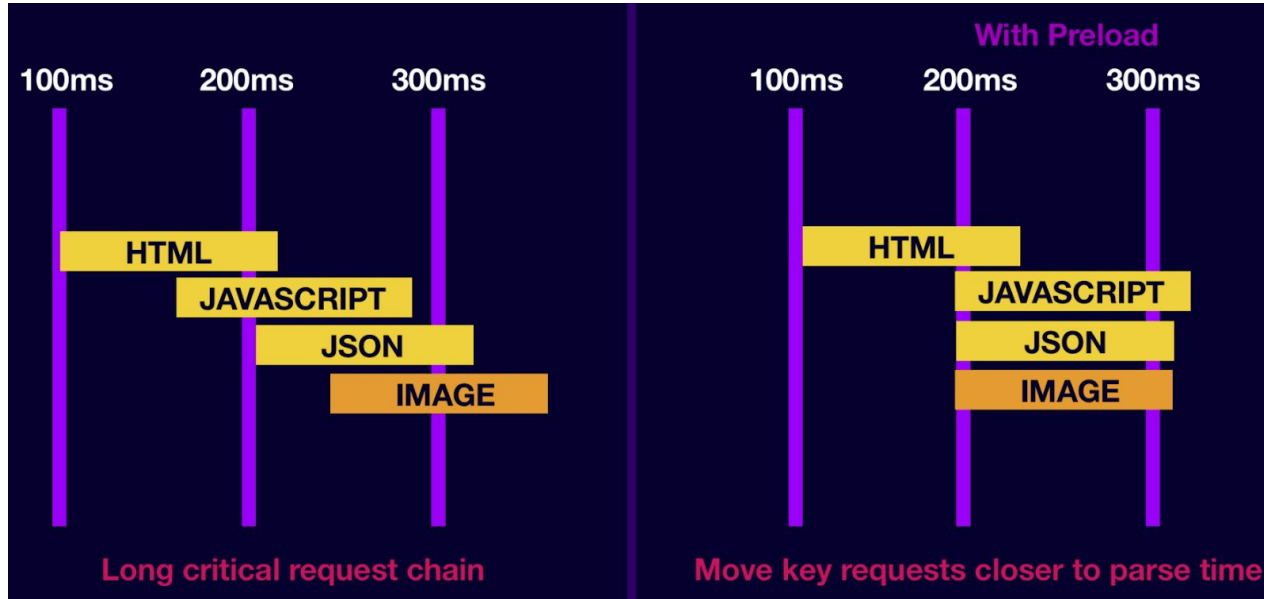

TU CAM

 Carga previamente las solicitudes clave

1,95 s ^

Te recomendamos usar `<link rel=preload>` para dar prioridad a los recursos que se solicitan más tarde al cargar la página. [Más información](#) `FCP` `LCP`

URL

Ahorro potencial

...fonts/fontawesome-webfont.woff2?v=4.7.0

1950 ms

URL

Hint Type

As Attr

https://www.ejemplo.com/wp-content/plugins/random/resources/icons/fa/fonts/fontawesome-webfont.woff2?v=4.7.0

preload

font

TU CAM

Oportunidad

Ahorro estimado

▲ Carga previamente las solicitudes clave

3,15 s ▼

Advertencias: Se ha encontrado un elemento `<link>` de precarga para "https://www.soloquiz.com/wp-content/plugins/wp-viral-quiz-gr/resources/icons/fa/fonts/fontawesome-webfont.woff2?v=4.7.0", pero el navegador no lo ha usado. Comprueba que el atributo `crossorigin` se esté usando correctamente.

Update Resource Hint

Domain or URL:

DNS-Prefetch ☐ Prefetch ☐ Prerender ☐ Preconnect ☐ Precarga ☒

Crossorigin? ☒ as: Mime Type:

Crossorigin applies to preconnect and preload hints only. For various reasons, font files (and others) need to be loaded with the crossorigin attribute. [Source: Mozilla](#)

Cancel Update

● Carga previamente las solicitudes clave ▼

TU CAM

PREFETCH


Improve navigations with rel=prefetch

Adding `<link rel=prefetch>` to a web page tells the browser to download entire pages, or some of the resources (like scripts or CSS files), that the user might need in the future. This can improve metrics like [First Contentful Paint](#) and [Time to Interactive](#) and can often make subsequent navigations appear to load instantly.

```
<link rel="prefetch" href="/articles/" as="document">
```

How does **prefetch** improve page load?

Reduces page transition time.

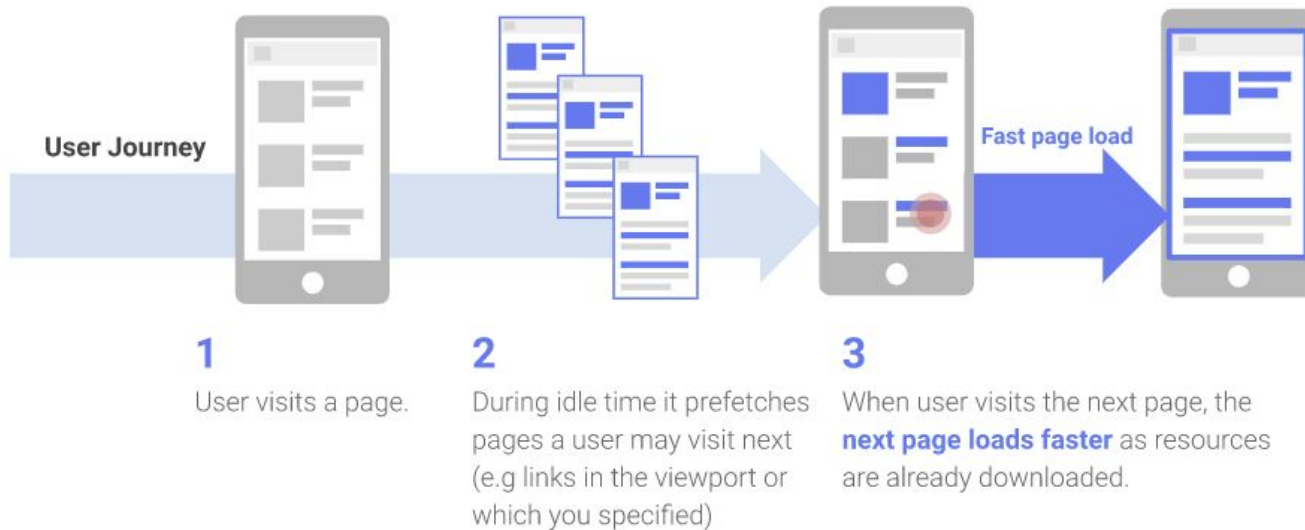

TU CAM

Prefetching static assets

Prefetch static assets, like scripts or stylesheets, when subsequent sections the user might visit can be predicted. This is especially useful when those assets are shared across many pages.

For example, Netflix takes advantage of the time users spend on logged-out pages, to prefetch React, which will be used once users log in. Thanks to this, they [reduced Time to Interactive by 30% for future navigations](#).

Add New Resource Hint

Domain or URL:	Enter valid domain or URL here...			
DNS-Prefetch ☐	Prefetch ☐	Prerender ☐	Preconnect ☐	Precarga ☐
Cross-Origin ☐			Mime Type:	
Media Attribute ☐				

Insert the full URL of a resource that is likely to be needed on a page later.

Insert Resource Hint





Quicklink for WordPress


Por WP Munich

Descargar

TU CAM


What is prefetch?

Pre-downloading resources that could be used in next pages.

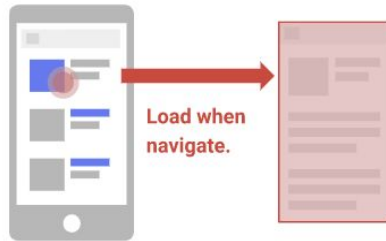

Without Prefetch:

Each subsequent page may takes significant time to load.

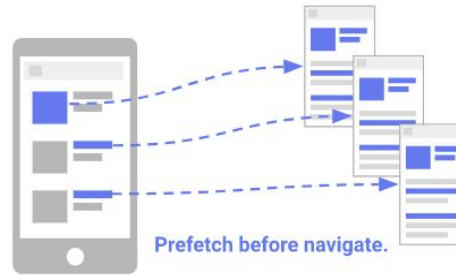


With Prefetch:

Before navigation, proactively prefetch resources for predictable next pages.

Quicklink attempts to make navigations to subsequent pages load faster. It:

- **Detects links within the viewport** (using `Intersection Observer`)
- **Waits until the browser is idle** (using `requestIdleCallback`)
- **Checks if the user isn't on a slow connection** (using `navigator.connection.effectiveType`) or has data-saver enabled (using `navigator.connection.saveData`)
- **Prefetches URLs to the links** (using `<link rel=prefetch>` or XHR). Provides some control over the request priority (can switch to `fetch()` if supported).

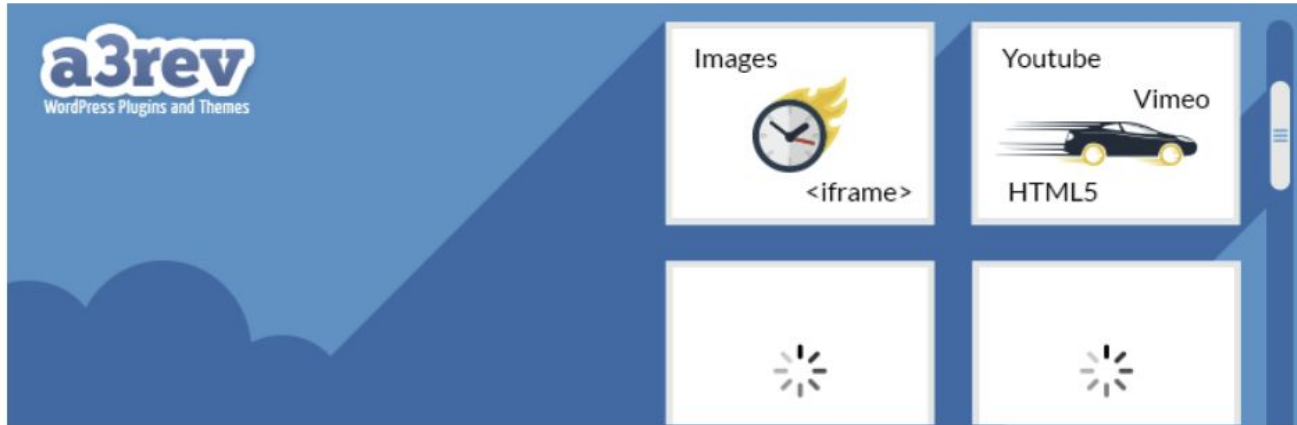

a3 Lazy Load
Por a3rev Software

Descargar

TU CAM





<https://carlosortega.page/seo-on-serp/>


▲ 0-49 ■ 50-89 ● 90-100 ⓘ



<https://carlosortega.page/seo-on-serp/>

▲ 0-49 ■ 50-89 ● 90-100 ⓘ

TU CAM

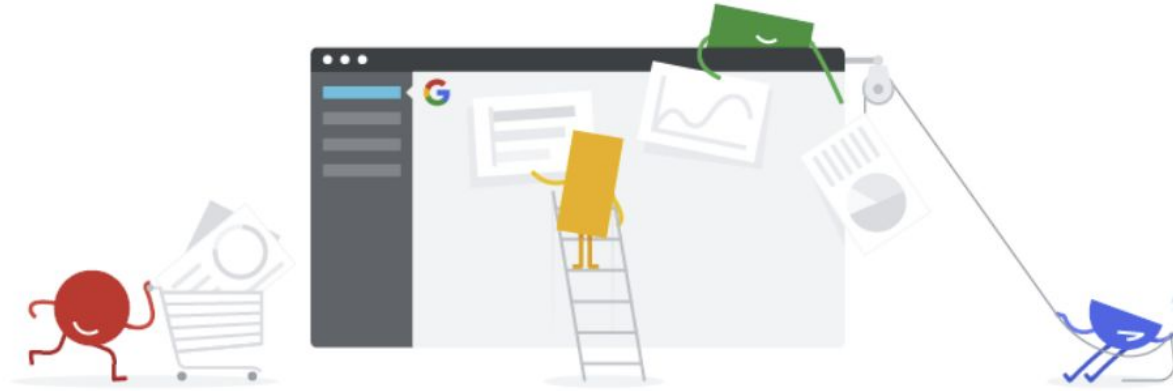


Site Kit by Google – Analytics, Search Console,
AdSense, Speed

Por Google

Descargar

TU CAM

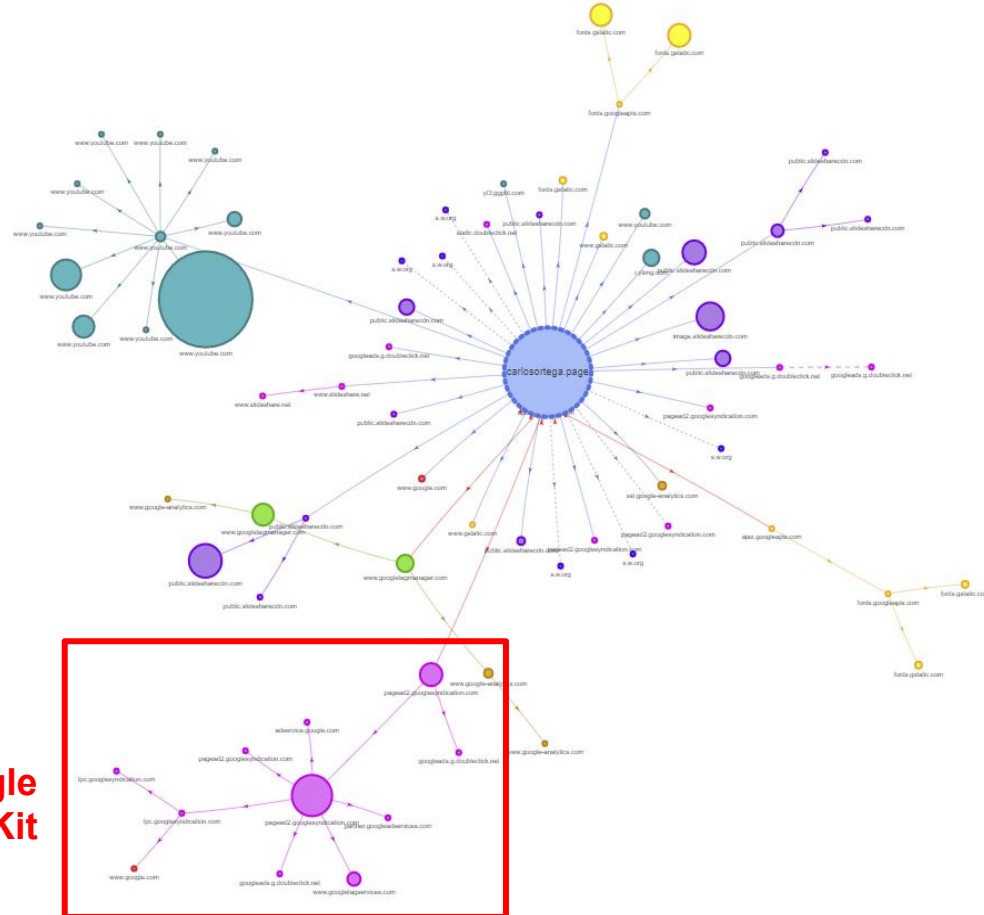

Google
SiteKit

TU CAM




<https://carlosortega.page/seo-on-serp/>

▲ 0-49 ■ 50-89 ● 90-100 ⓘ



<https://carlosortega.page/seo-on-serp/>

▲ 0-49 ■ 50-89 ● 90-100 ⓘ



TU CAM

¡MUCHAS GRACIAS!

TU CAM