

# Pizza Sales — SQL KPI Queries

Concise reference for key SQL queries used to measure pizza sales performance.

Made with GAMMA



# Total Revenue

Query

```
select SUM(total_price) As Total_Revenue from [pizza_sales (1)];
```

Made with GAMMA





# Average Order Value (AOV)

Use total revenue divided by distinct orders to get AOV.

```
select SUM(total_price) / COUNT(DISTINCT order_id) AS
Avg_order_value from [pizza_sales (1)];
```

Made with GAMMA

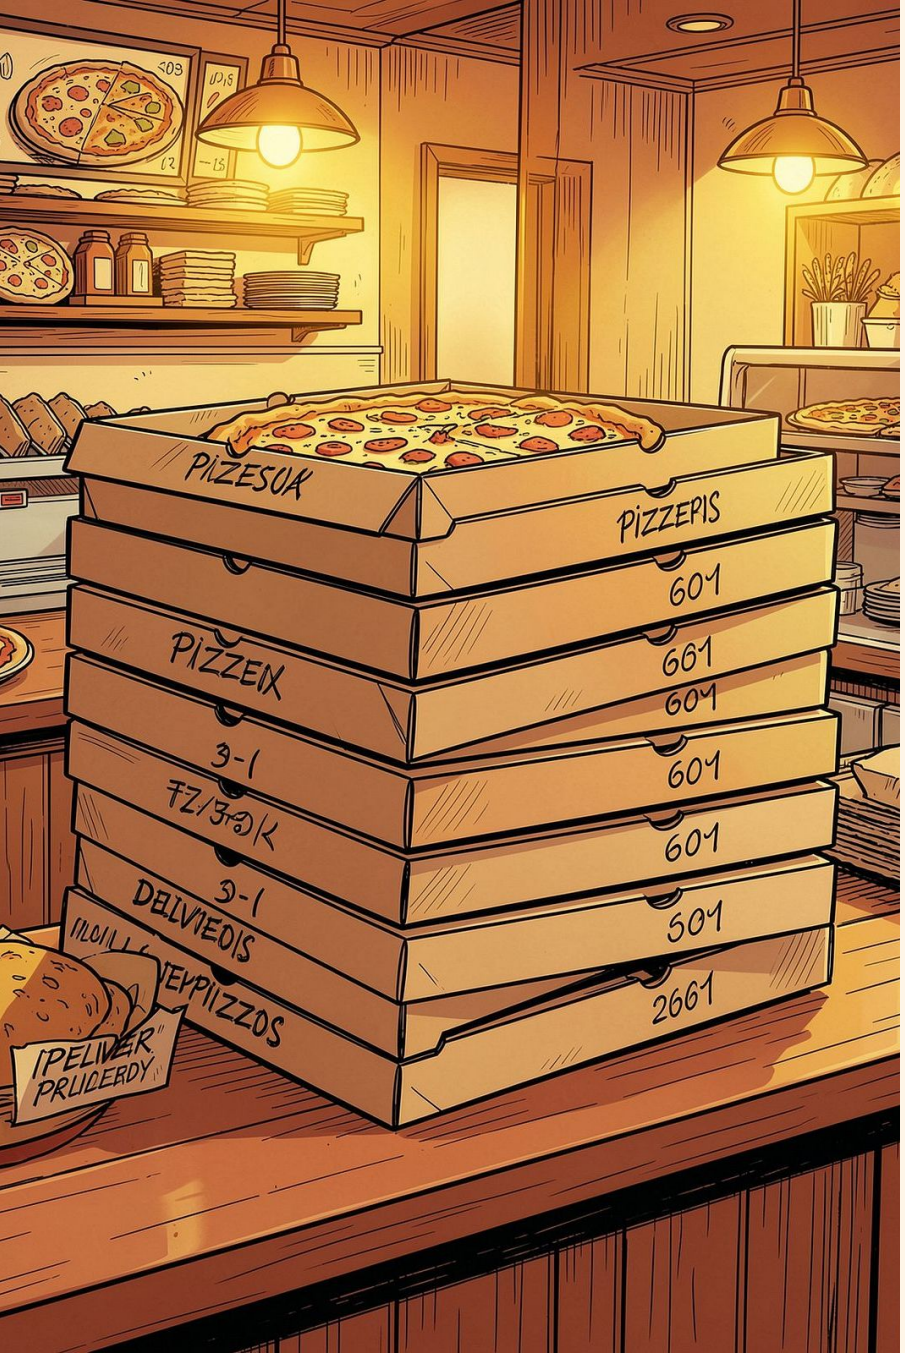


# Total Pizza Sold

Sum quantities across all sales to measure volume.

```
select SUM(quantity) AS Total_Pizza_Sold from [pizza_sales (1)];
```

Made with GAMMA




# Total Orders

Count distinct order IDs to get total number of orders.

```
select count(distinct order_id) AS Total_orders from [pizza_sales
(1)];
```

Made with GAMMA

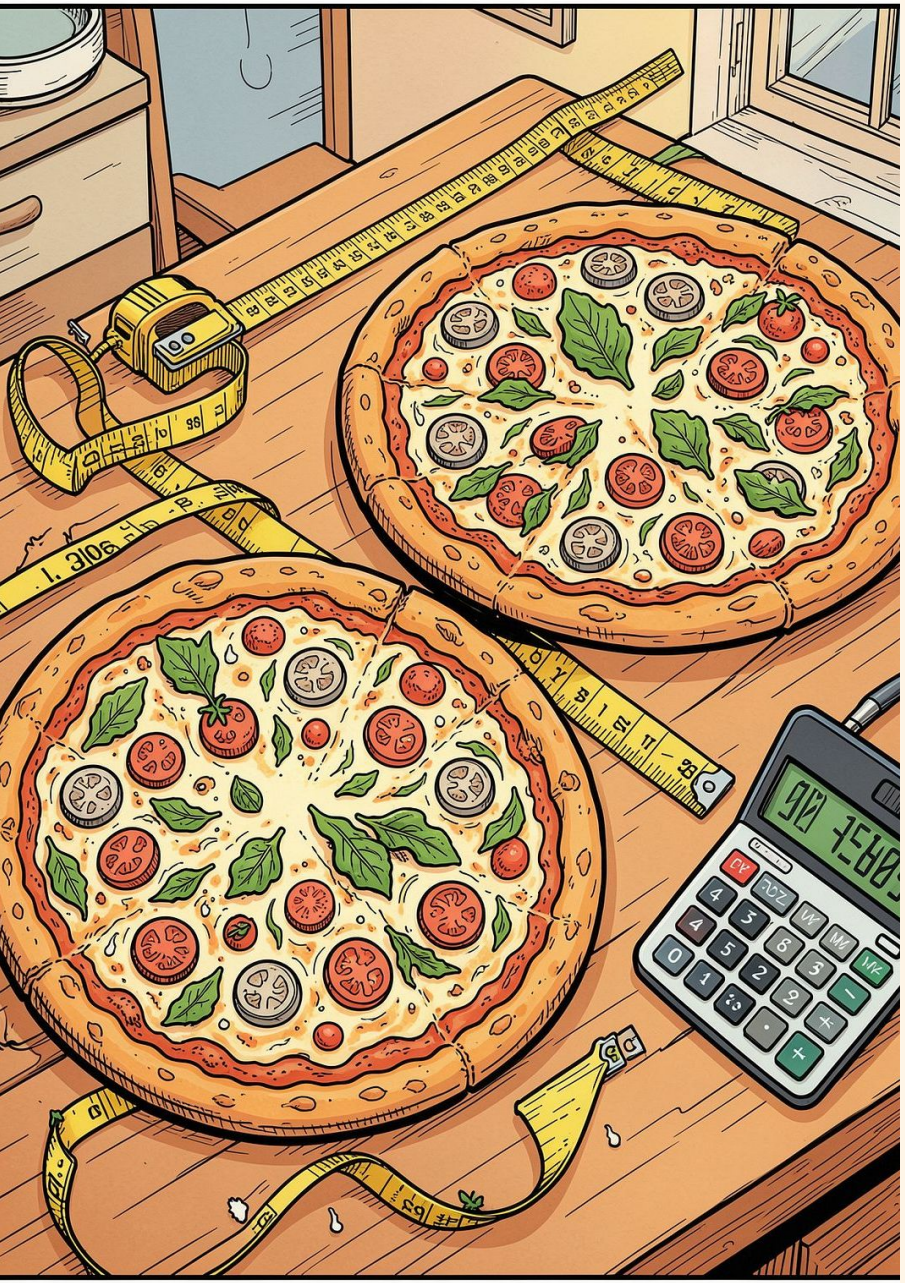

# Average Pizzas per Order

Compute average quantity per distinct order (decimal precision preserved).

```
SELECT CAST(CAST(SUM(quantity) AS DECIMAL(10,2)) /
CAST(COUNT(DISTINCT order_id) AS DECIMAL(10,2)) AS
DECIMAL(10,2)) AS Avg_Pizzas_Per_order from [pizza_sales (1)];
```

Made with GAMMA

# Query Checklist & Tips

## Data Hygiene


Ensure total_price and quantity have correct data types and no nulls.

## Distinct Keys


Use COUNT(DISTINCT order_id) to avoid double-counting order lines.

## Precision

Cast numerators and denominators to decimals for accurate averages.

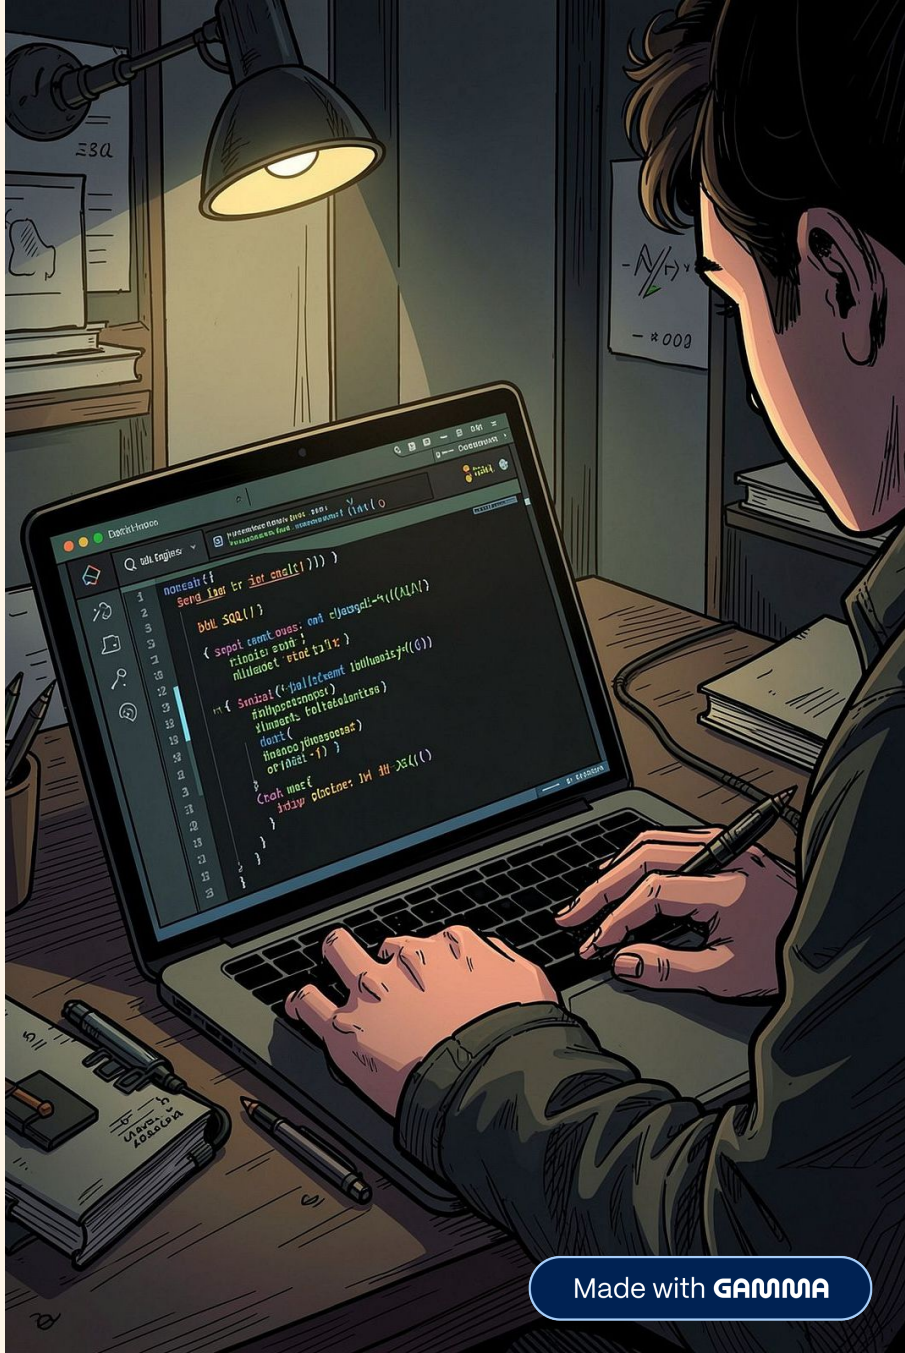

# Visualizing KPIs

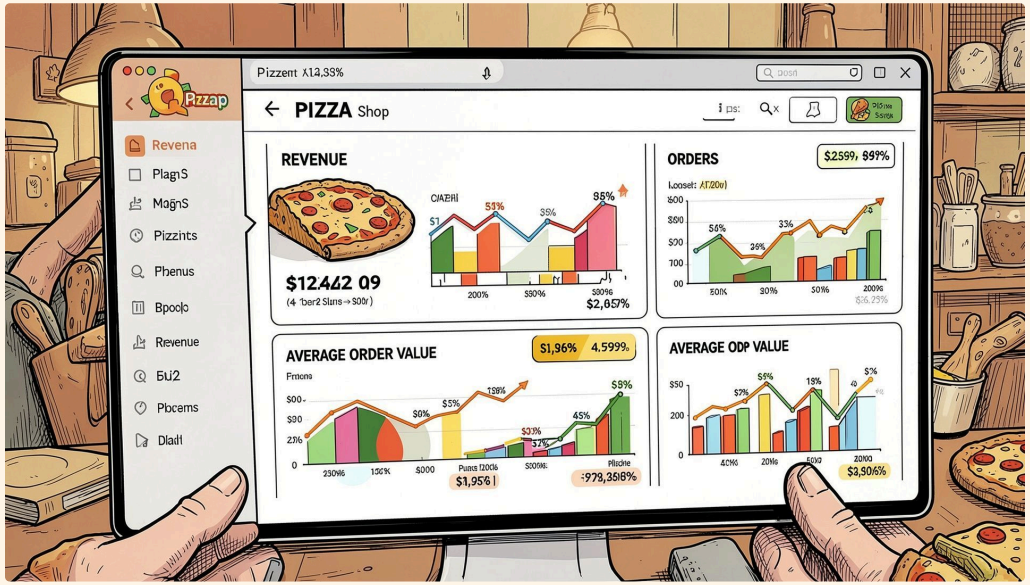


Recommended visual tiles: Revenue (trend), Orders (count), AOV, Total Pizza Sold, Avg Pizzas/Order. Update daily for operational tracking.

Made with GAMMA

# Operational Queries (Examples)

## Revenue by Day

Group by order_date to analyze daily trends.

## Top-Selling Pizzas

Group by item_id or product_name and sum quantity.

## Delivery vs Pickup

Segment orders by fulfillment_type to optimize operations.



# Next Steps

## Validate Data

Run sanity checks on totals and counts

Made with GAMMA