Python Bootcamp




12th Feb to 15th Feb 2023


Email *


2020ce32f@sigce.edu.in


- ✓ to control the fractional part which function can be used?
- floor()
- round()
- ceiling
- rounding()

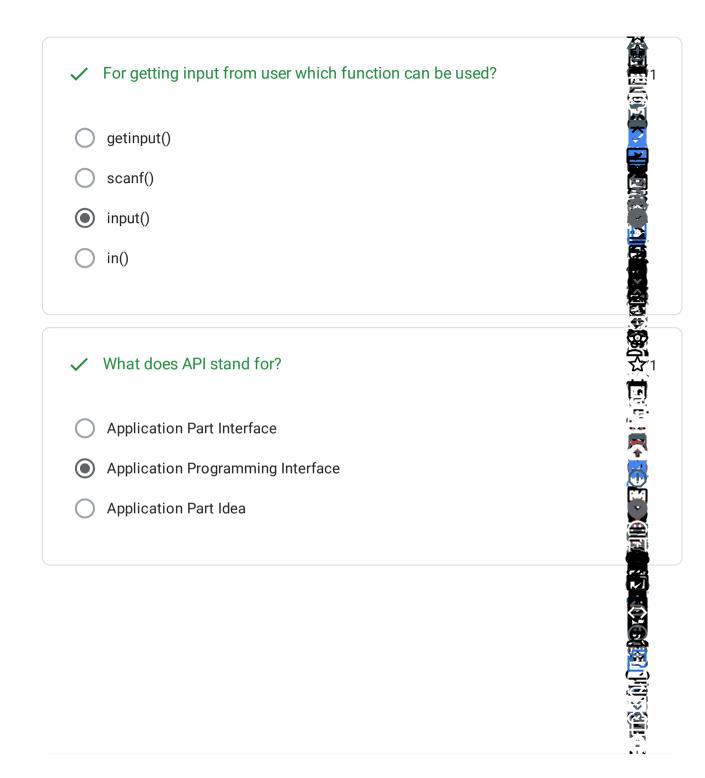


X To get floating point number from user which function can be used? double() real() float() floating Correct answer real() randint(1, 5) will generate random integer between 1 to 4 random integer between 1 to 5 random integer between 0 to 4 random integer between 0 to 5

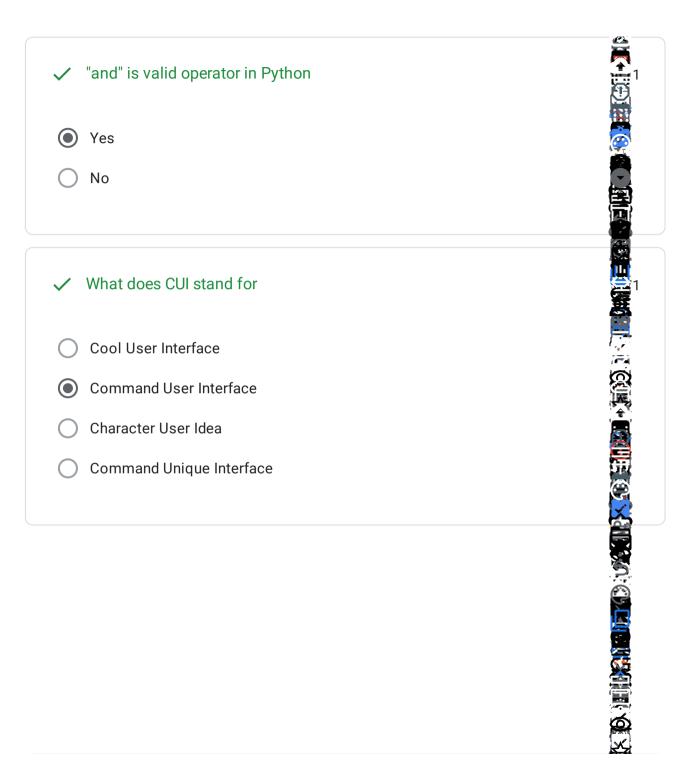

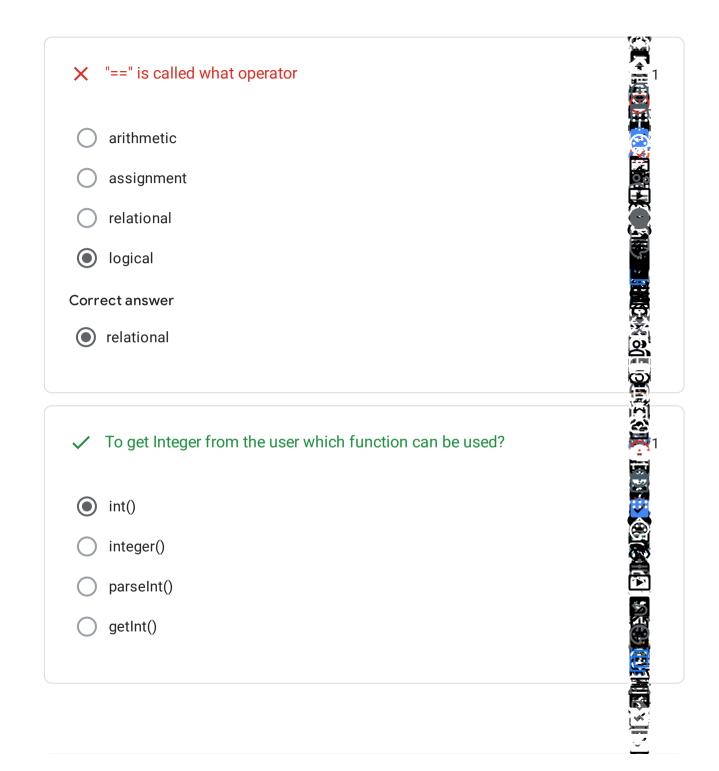

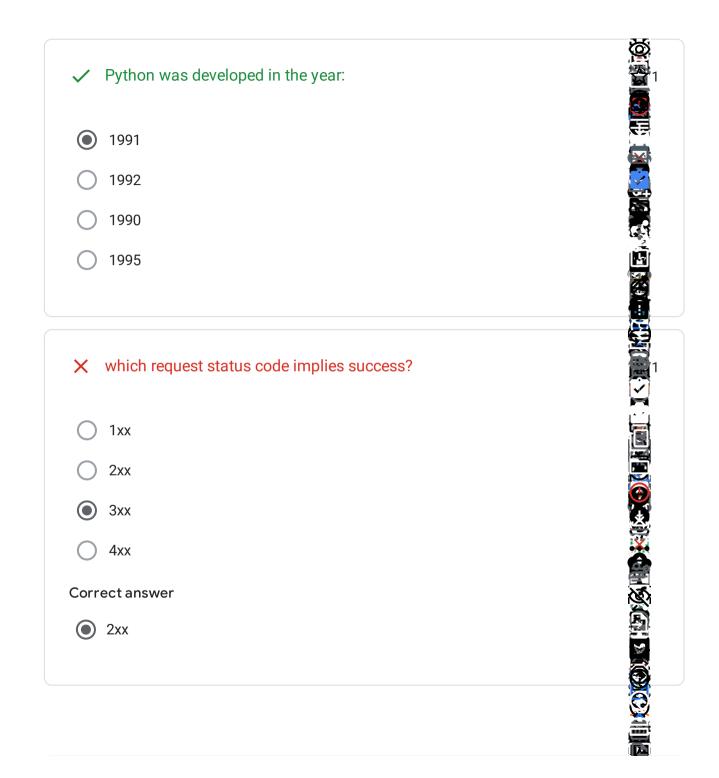

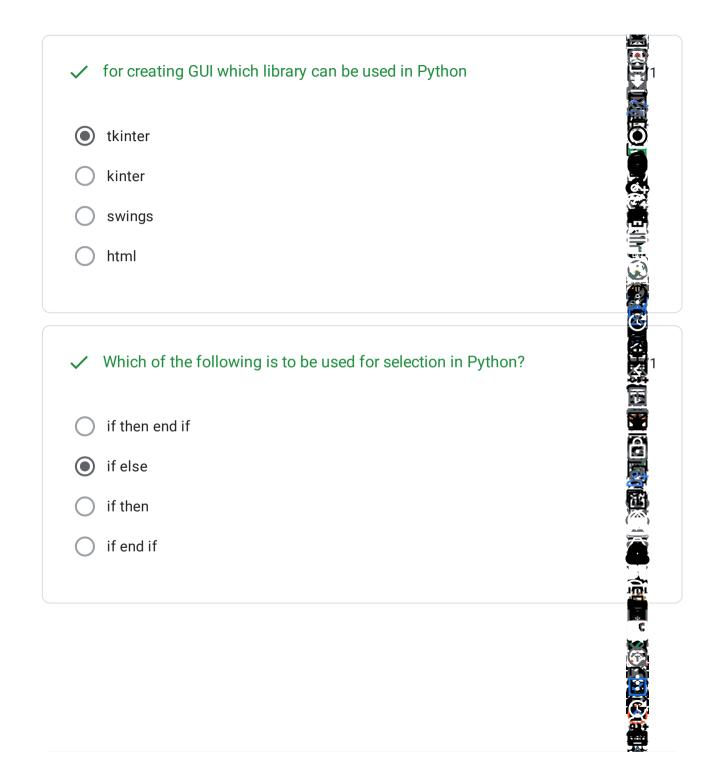

✓ which request status code implies client error○ 2xx

3xx

4xx

O 5xx


 \checkmark 2 * 3 + 5 will evaluate to


16

11

10

30

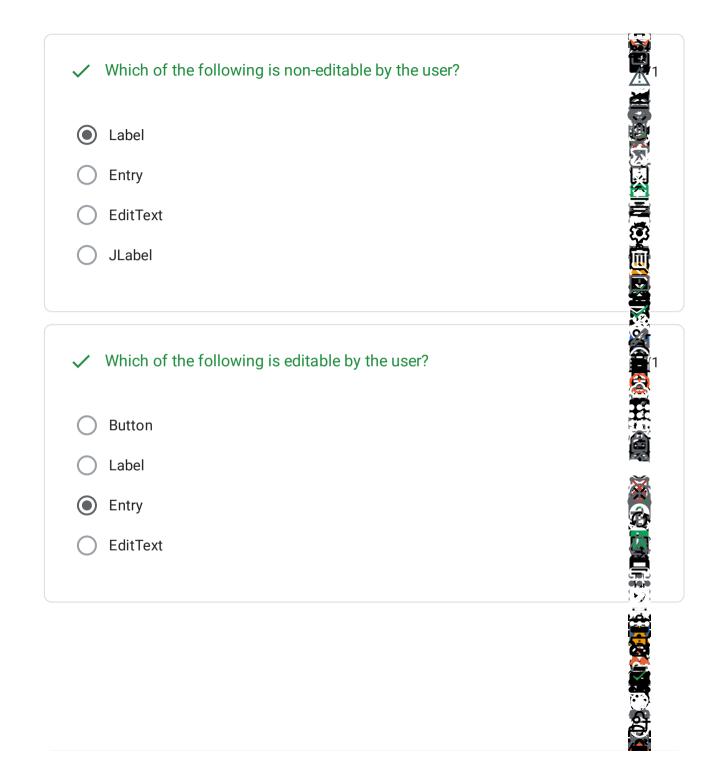

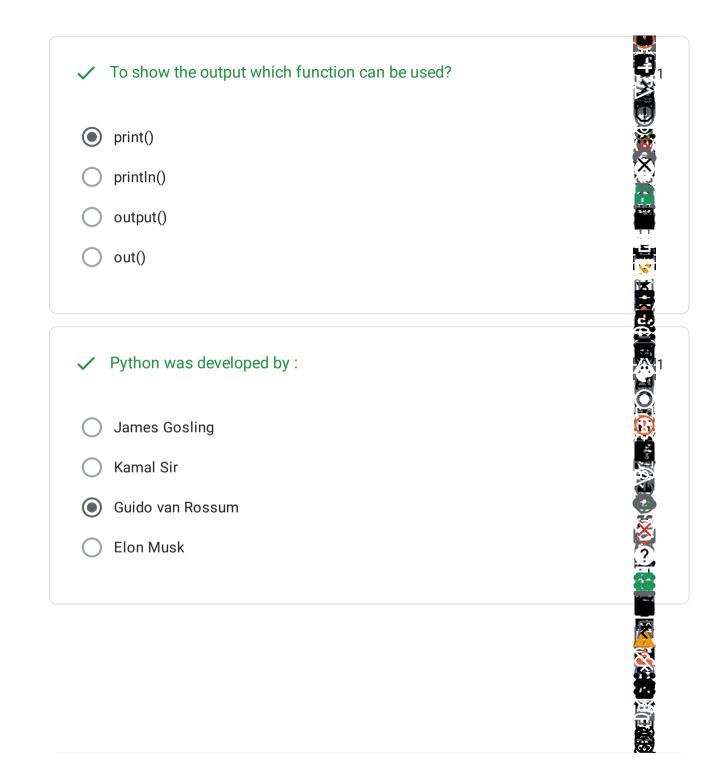

root.after() method requires how many parameters
1
2
3
4

This form was created outside of your domain. - <u>Terms of Service</u> - <u>Privacy Policy</u>

Google Forms













