
Guide for Installation

Developer setup | Team 1 - T3.2605.E1.FPT

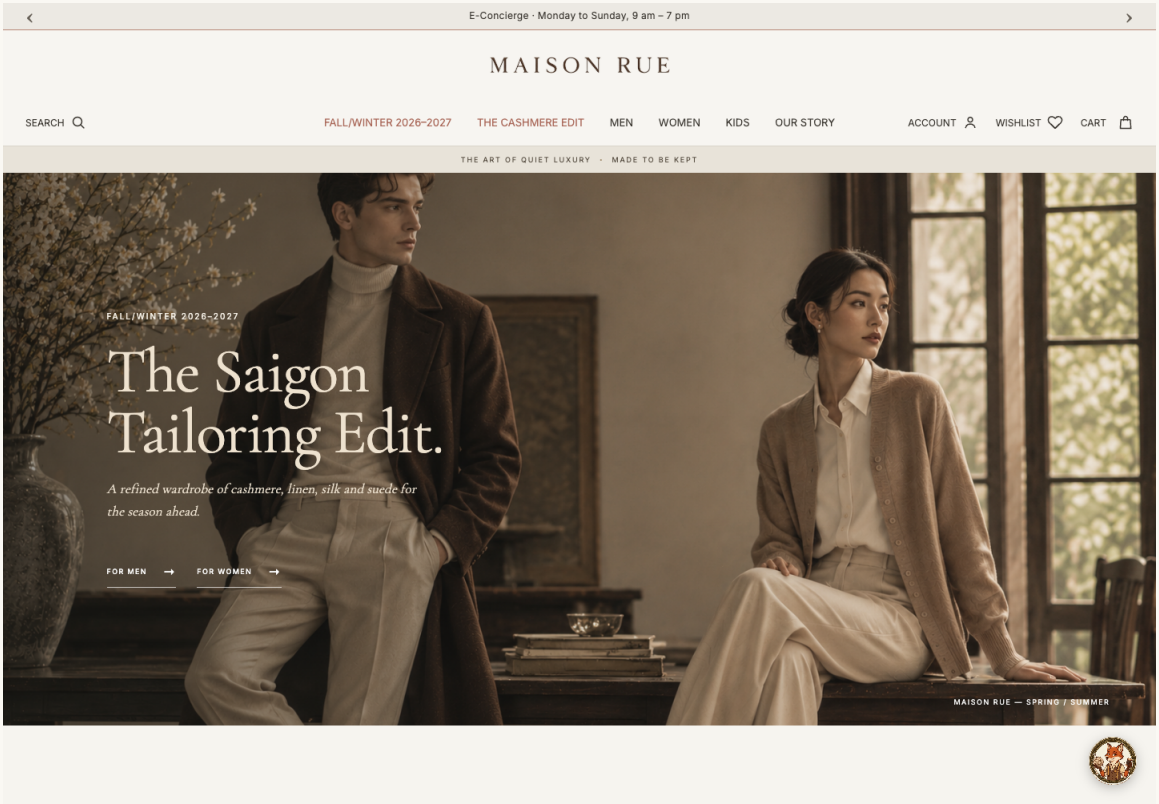

Required software

Node.js 22.12 or later, npm, a Microsoft SQL Server instance, a SQL management client and a modern browser. Vite also supports Node 20.19 or later in its supported 20.x range.

Project files

Use the supplied Maison Rue repository. package.json contains startup and database scripts; server/db contains the schema, seed and migrations.

Before installation

Use a separate development database. Migration and seed commands change database records; back up an existing database before applying them.

1 Configure the environment

Install dependencies

Open a terminal in the repository root and run `npm install`. Keep the package lockfile with the project.

Local configuration

Copy .env.example to .env, then set your own database connection and session secret. Do not publish real credentials.

Setting	Development configuration
PORT	5001, or another available API port
CLIENT_ORIGIN	http://localhost:5173
DB_SERVER and DB_PORT	Your SQL Server host and TCP port, typically 1433
DB_NAME	MaisonRueDB
DB_USER and DB_PASSWORD	A valid SQL login for this development database
JWT_SECRET	A unique randomly generated secret
DB_TRUST_SERVER_CERTIFICATE	true for a trusted local development server


The example file defaults PORT to 5000. The current local project uses 5001. Vite reads PORT to proxy /api, so keep the running API and environment aligned.

2 Prepare SQL Server

Create and connect
Create an empty database named MaisonRueDB in your SQL management client. Enable TCP connectivity and verify the host, port and SQL login from the development machine.

Apply schema and seed
Run `npm run db:migrate`. The script executes server/db/schema.sql, incremental SQL files and the seed. Read all warnings: an already existing object and a failed migration are not equivalent.

Optional demonstration setup
npm run setup additionally runs metrics, cost, analytics and promotion distribution scripts. It changes demonstration data and is intended for a development environment.

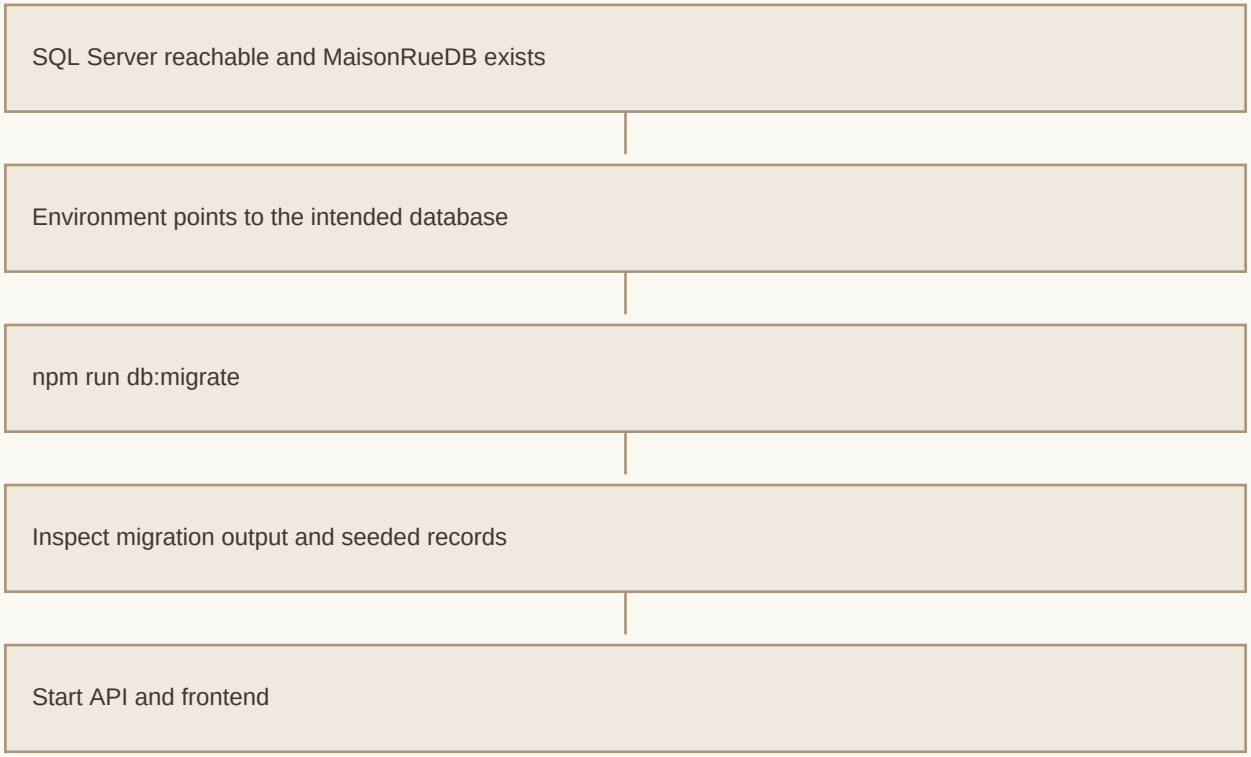

Do not rerun catalogue replacement scripts as a routine troubleshooting step.

3 Start the project

Combined startup

Run `npm run dev`. scripts/dev.js starts Express and Vite together. Keep this process running while using the website.


Separate terminals

Alternatively run `npm run server` and `npm run client` in separate terminals.

Check	Expected result
http://localhost:5173	Storefront loads
http://localhost:5001/api/health	Successful API health response when PORT is 5001
http://localhost:5001/api/products	Product response from the API
Backend terminal	SQL Server connected and API listening
npm run build	Vite production build completes

Port conflicts

If Vite selects 5174, check the existing 5173 process and permitted client origin. If the backend reports its port is occupied, identify the old process before stopping or replacing it.

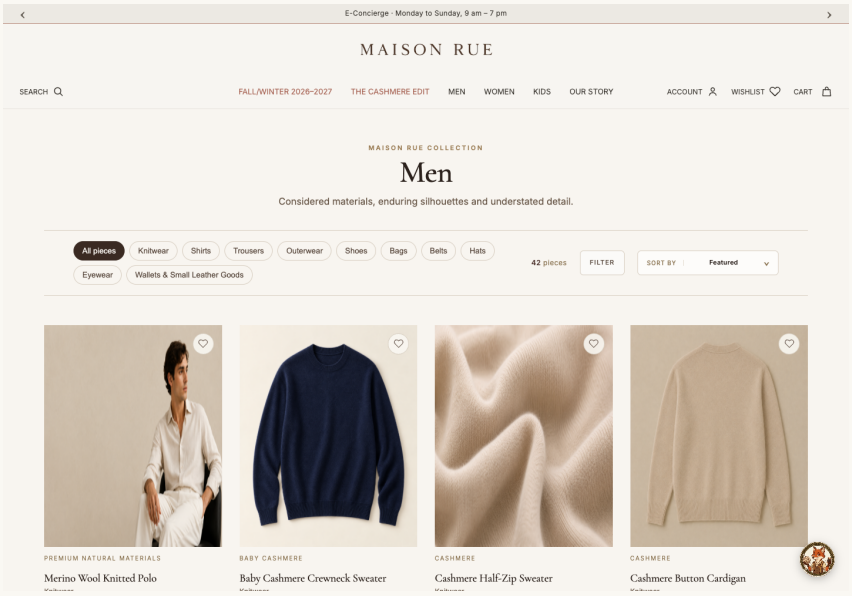


4 Demo portal access

These are development seed defaults. Existing accounts may retain a different password; the seed does not reset every existing password.

Portal	Seed email	Initial password
Customer	vudat9532@gmail.com	customer123
Staff	staffmaisonrue@gmail.com	staff123
Admin	vanhung29993@gmail.com	admin123

Portal paths
Customer /login
Staff /staff/login
Administrator /admin/login

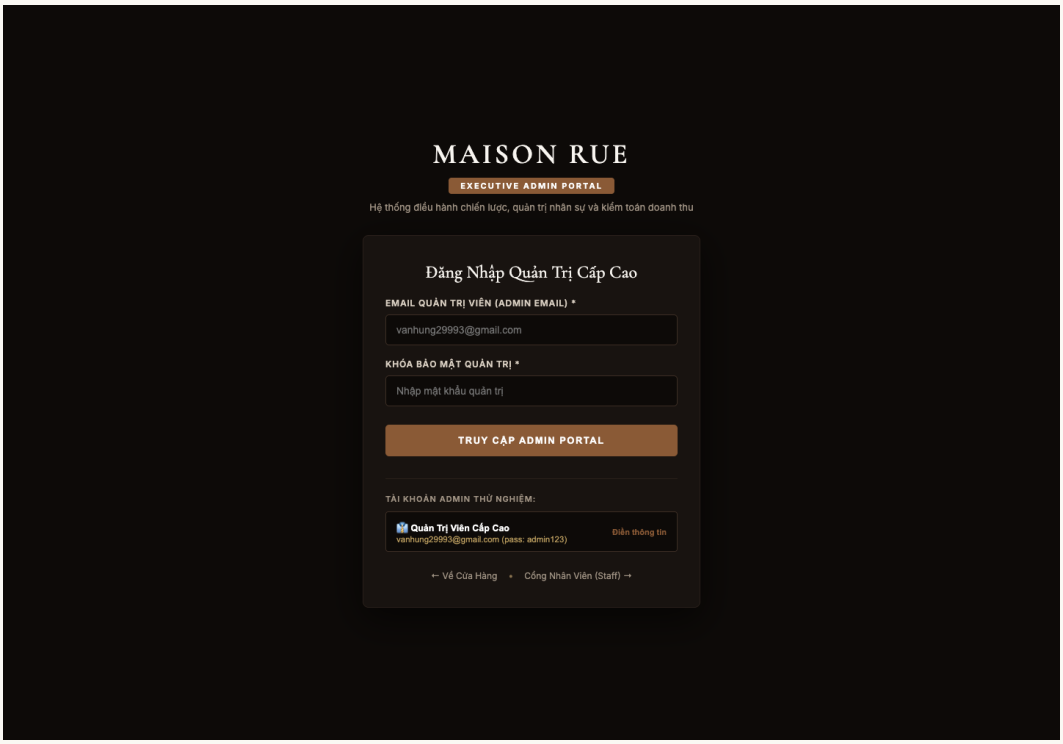

Replace demonstration accounts before public deployment. Never use sample bank details as a real payment instruction.

5 Optional external services

Google address suggestions
Set GOOGLE_MAPS_API_KEY for the server integration. Enable the required Places and Geocoding services for the implementation, configure billing if required by the provider, and restrict access appropriately. Restart the backend after changes.

Rue assistant
The current UI reads VITE_CHAT_API_KEY and calls an external chat service. VITE values are included in the browser bundle; move secret bearing AI calls to the backend before a public deployment. Without configuration, the assistant uses a fallback response.

Email workflows
Configure the EmailJS service, public key and templates used by the code. Verify delivery with test recipients before relying on order, return or stock emails.

Newsletter
The footer currently has a subscription interface. A visible success state must not be treated as proof of integration with a mailing list provider.

Verification
Test address suggestions, assistant responses and email delivery separately. Core product browsing should not be used as evidence that an external integration is operational.

6 Troubleshooting and handover

Symptom	Checks
Cannot connect to server	Confirm API process, PORT, Vite proxy and SQL Server availability.
HTTP 500	Inspect the failing request and server log; check migration failures and database connection.
Empty exchange options	Verify order item product ID, active variants and the exchange options API response.
No delivered orders	Confirm account identity, database and order filter; use a dedicated delivered demo order.
Address dropdown unavailable	Verify API key, enabled services, restrictions and backend response.
Build or JSX error	Read Vite file and line output; repair syntax before restarting.

Release checks

Build frontend assets; configure a production server or reverse proxy, TLS, secure cookies, database backups and service secrets. Vite development mode is not a production deployment.

Useful commands

npm run build
npm run lint
npm test

These commands are provided by the repository; execute them in the intended test environment.