

Assignment 1 Report

Name: Alizhan Rashid, Dauren Eskuatov

Group: SE-2535

Task A - Anatomy of a Real Page

1. Technical Baseline & Metadata

Analyzed URL: <https://happycake.kz/astana>

DOCTYPE: <!DOCTYPE html>

lang: ru (<html class="hc-js" lang="ru">)

charset: utf-8 (<meta charset="utf-8">)

viewport: width=device-width, initial-scale=1.0

Title: Happy Cake Астана

Three Meta Tags Found in Source:

1.<meta name="description" content="Заказ и доставка свежих тортов и десертов Happy Cake в Астане.">

2.<meta name="keywords" content="Happy Cake, торты Астана, заказ тортов, кондитерская">

3.<meta property="og:type" content="website">

2. Semantic Analysis & Element Usage

Semantic Tag Usage: Basic top-level layout utilizes <header>, <nav>, <footer>, and tags.

Forms & Tables: Order form elements rely on basic <input> fields wrapped in generic wrappers without grouping structures. Product pricing and weights are arranged inside flex/grid div layouts rather than semantic <table> elements.


3. Hand-Drawn Page Structure

AliZhan R.

Dauren E.

Date: 13.09.2026

~~DA~~

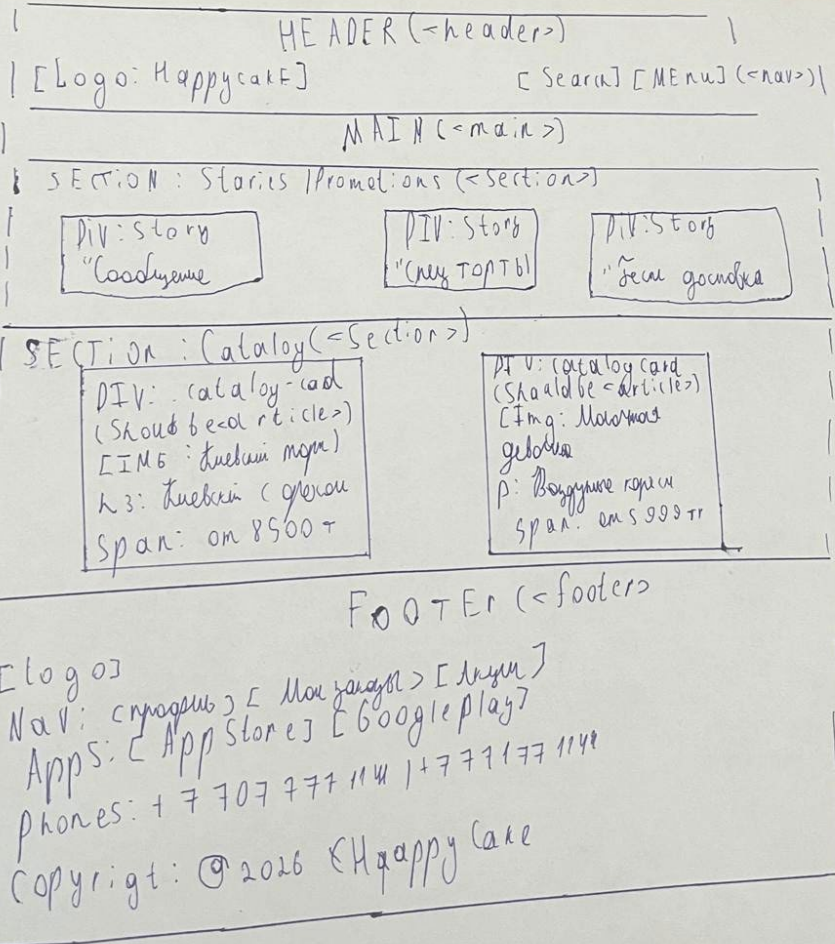

4. Structural Mistakes Found & How They Were Avoided

Mistake 1: Deep Div Nesting for Content Modules.

Issue on Target Site: Happy Cake relies heavily on div wrappers for products and content sections due to Angular template rendering.

Our Solution: We replaced generic div containers with native HTML5 semantic tags: `<article>` for distinct content blocks, `<aside>` for supplementary delivery notes, and `<figure>/<figcaption>` for dessert images.

Mistake 2: Unstructured Form Control Layout.

Issue on Target Site: Form input fields on the reference site are rendered without formal structural grouping, reducing accessibility for screen readers.

Our Solution: In `order.html`, form fields are logically separated into distinct `<fieldset>` sections with descriptive `<legend>` headers (Контактные данные and Параметры заказа).

Mistake 3: Absence of Tabular Data Markup for Prices.

Issue on Target Site: Product pricing and weight details are laid out using visual CSS grids inside div blocks rather than standard table structures.

Our Solution: In `menu.html`, all product rates and metrics are implemented via accessible `<table>` markup complete with `<caption>`, `<thead>`, `<tbody>`, and explicit `th scope="col"` headers.

Task B — Written Part

A web page is a plain text file structured with HTML elements, text content, and linked assets like images. When loading `index.html`, the browser parses the HTML code top-to-bottom, builds a Document Object Model (DOM) tree representing the element hierarchy, fetches image files, and renders the unstyled layout on screen.

Across our project files, we chose semantic tags over generic `<div>` elements:

1. In `index.html`, we wrapped the quality philosophy text in `<article>` instead of `<div>` because it is a self-contained, standalone block of narrative content.
2. In `index.html`, we used `<aside>` for free delivery terms rather than `<div>` because it contains auxiliary information secondary to the main content.
3. In `menu.html`, we enclosed the dessert price table in `<section>` instead of `<div>` to establish a distinct thematic grouping introduced by an `<h2>` heading.

When a visitor clicks "Отправить заявку" in `order.html`, the browser triggers built-in HTML validation for required fields like username. Once validated, it sends an HTTP POST request to

order.html. Since no backend server is connected yet, the page simply reloads without processing or storing data.

Github link: <https://github.com/daurenpelmen8656/Taptatti/tree/main/taptatti-website>