Experimenting RMarkdown

daveedortega

10/28/2020

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see http://rmarkdown.rstudio.com.
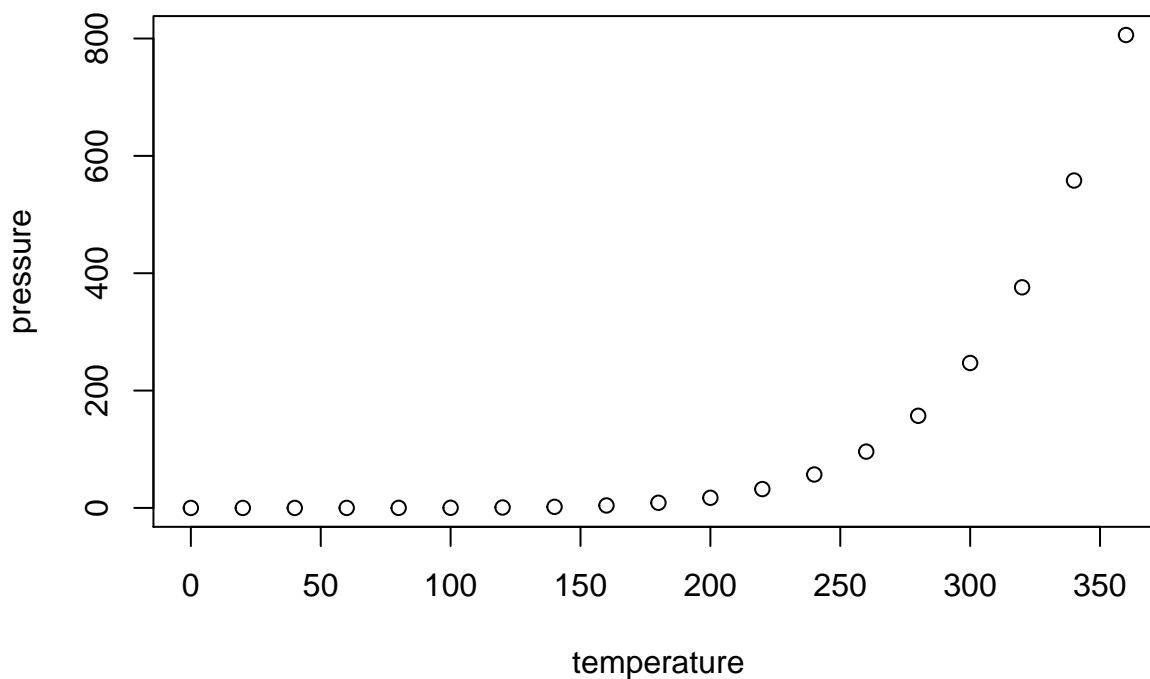
When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed           dist
##  Min.   : 4.0   Min.   :  2.00
##  1st Qu.:12.0   1st Qu.: 26.00
##  Median :15.0   Median : 36.00
##  Mean   :15.4   Mean   : 42.98
##  3rd Qu.:19.0   3rd Qu.: 56.00
##  Max.   :25.0   Max.   :120.00
```

Including Plots

You can also embed plots, for example:

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the

Fooling around

BOLD TITLE
italic title
two spaces after list objects to create it
-list
-of
-things
-Use CMD+OPT+I to create a code stuff, must be created with `{r}` in order to work
-CMND+SHIFT+ENTER to run a code chunk

```r
print('HelloMF!')
```

```
## [1] "HelloMF!"
```