


GDPS METRO GLOBAL – LAB: CONFIGURATION SWITCH



Switching from cascaded to multi-target configuration

- with GM primary disk in RegA.RS2

- Starting configuration

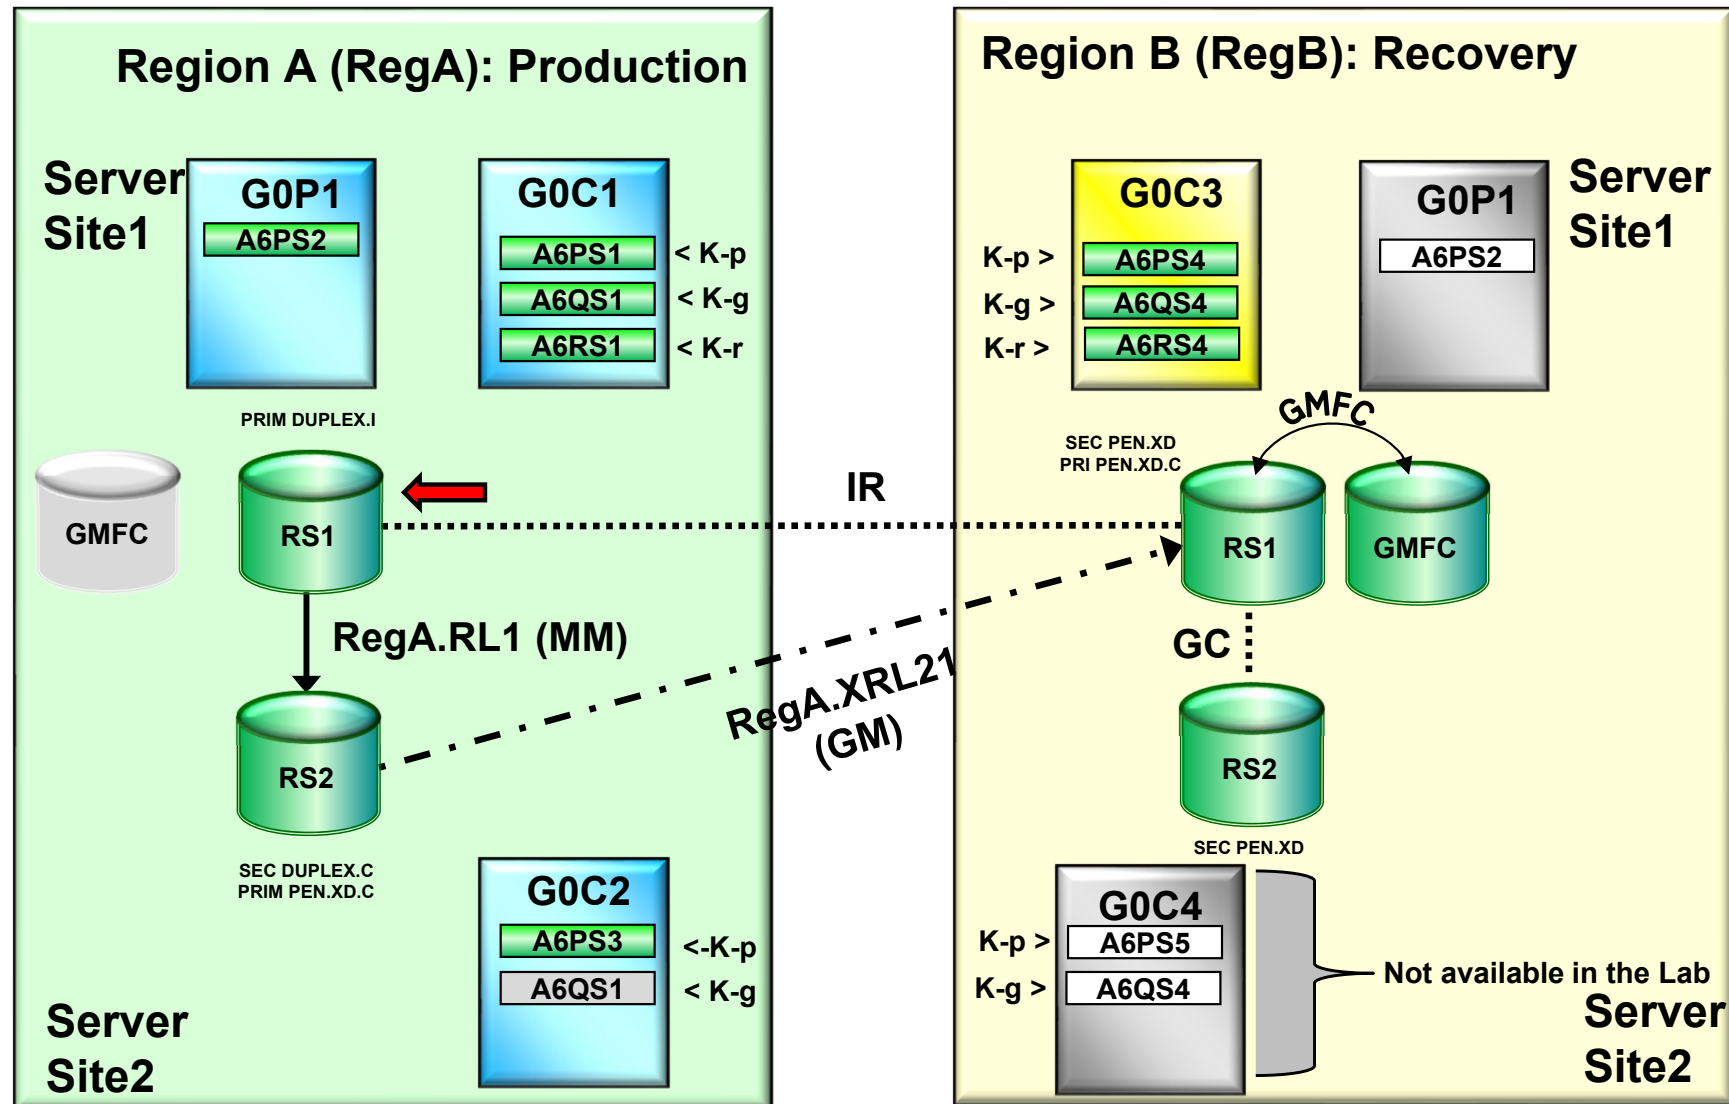

Switching from cascaded to multi-target configuration

- with GM primary disk in RegA.RS2

- High level steps

- Change the primary disks by executing a planned HyperSwap
- Re-establish Metro Mirror from RegA.RS2 > Reg.A.RS1 by running a START SECONDARY


- Used scripts:

- Control script with SWITCH HYPERSWAP SUSPEND
- Control script with START SECONDARY

Switching from cascaded to multi-target configuration

- with GM primary disk in RegA.RS2


- Target configuration

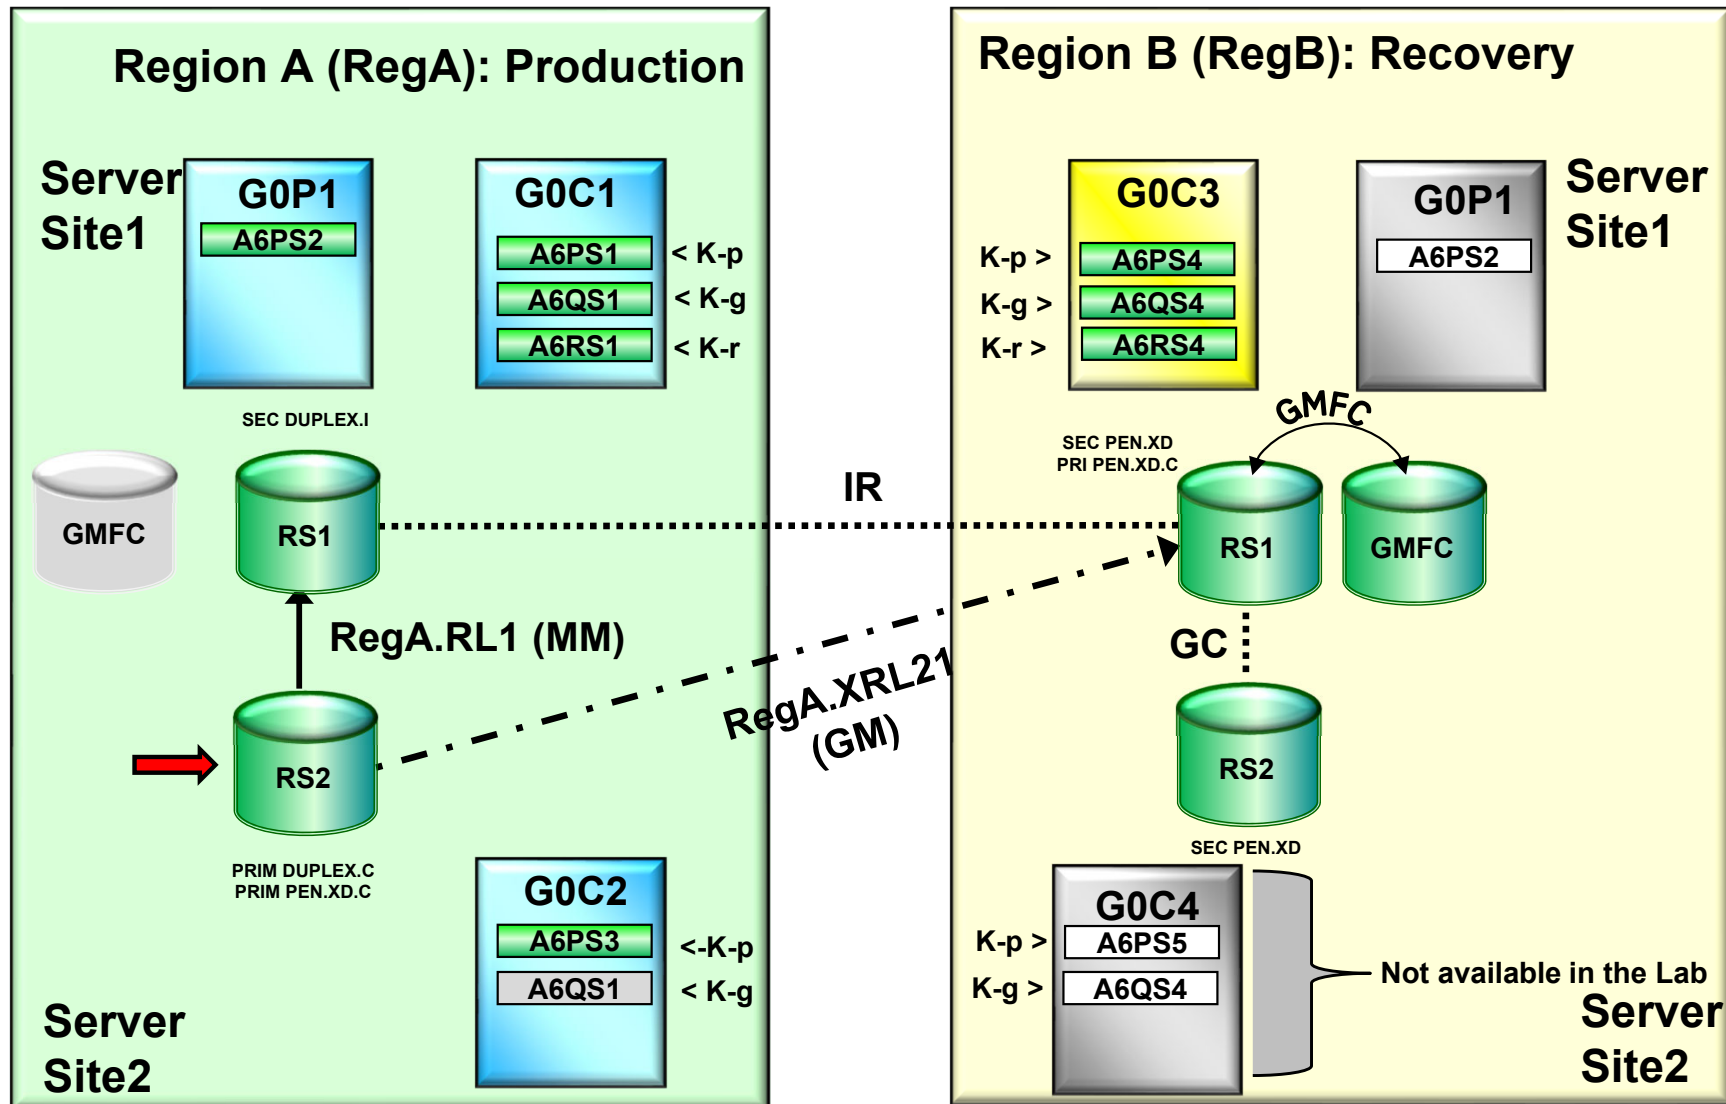

Switching from cascaded to multi-target configuration

- with GM primary disk in RegA.RS1

- Starting configuration

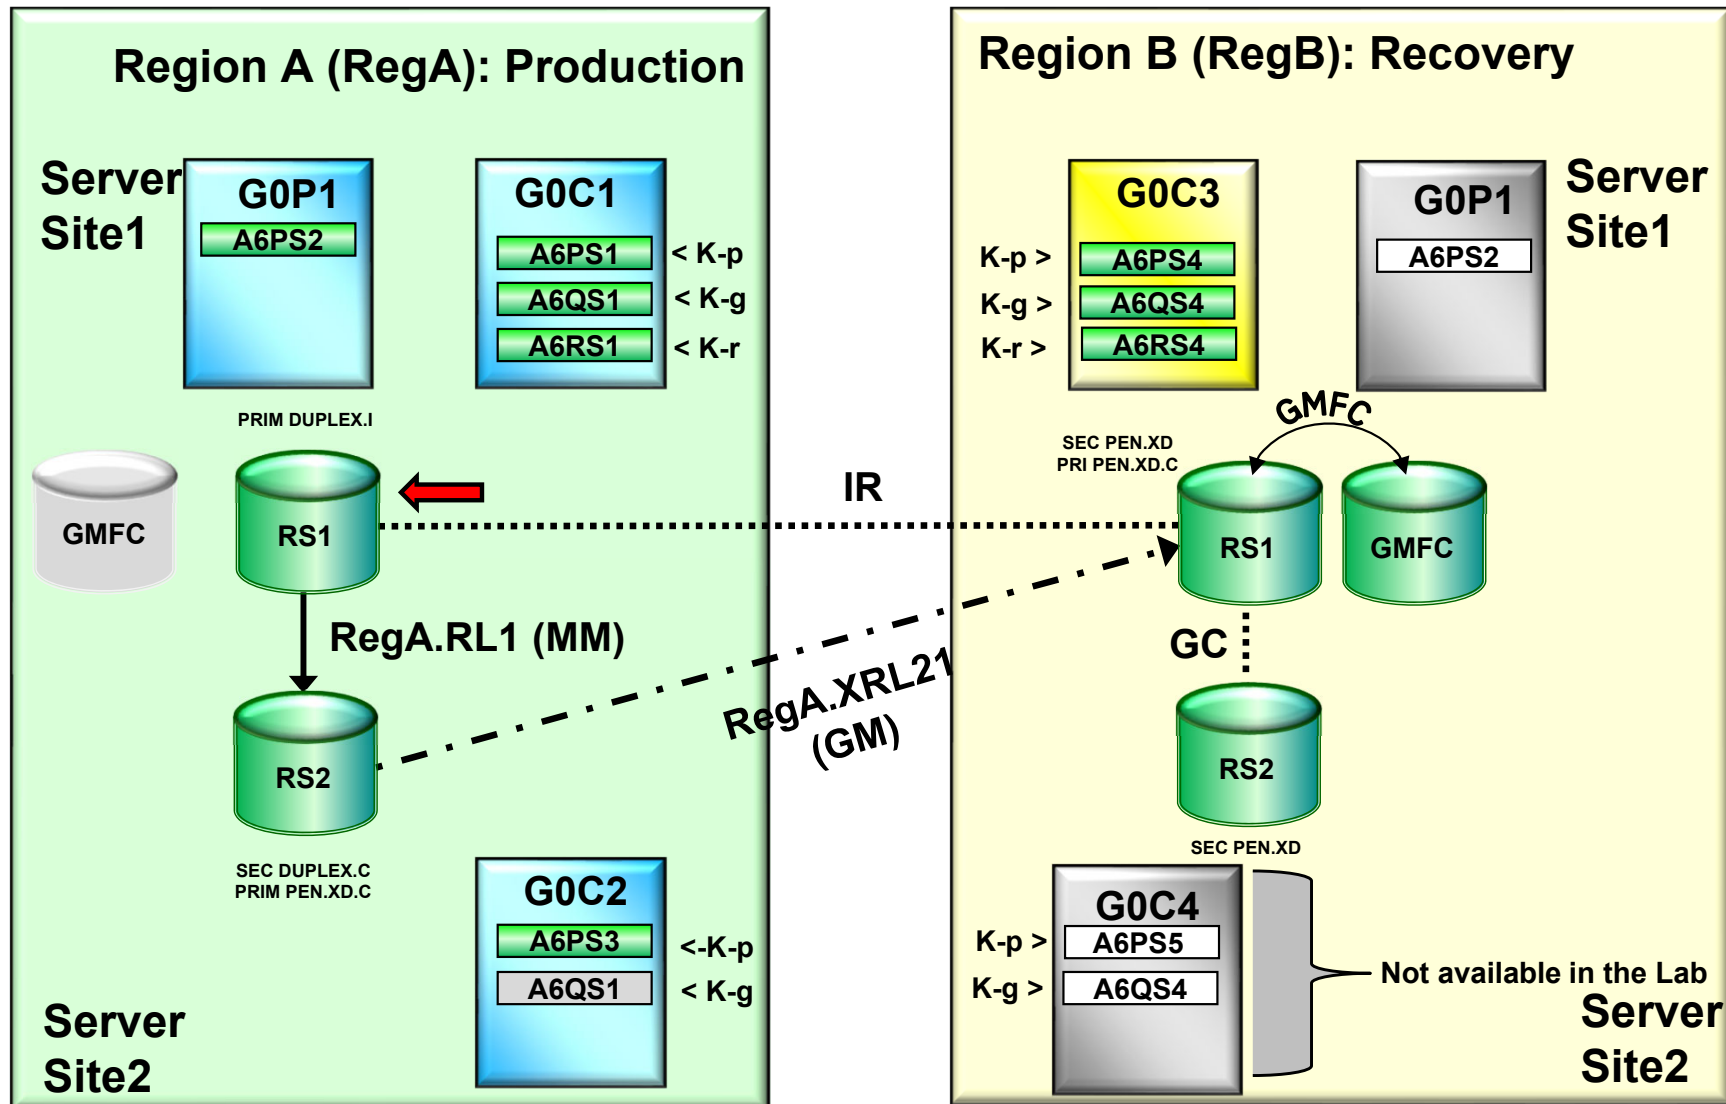

Switching from cascaded to multi-target configuration

- with GM primary disk in RegA.RS1

- High level steps


- Change the primary disks to get to a cascaded configuration with RegA.RS2 > RegA.RS1 > RegB.RS1
- Perform planned HyperSwap to RegA.RS1
- Re-establish Metro Mirror from RegA.RS1 > RegA.RS2 by running a START SECONDARY
- Move Kg-Sys to G0C2

- Used scripts:

- Control script with MGM4SITE_SWAP procedure
- Control script with SWITCH HYPERSWAP SUSPEND
- Control script with START SECONDARY

Switching from cascaded to multi-target configuration


- with GM primary disk in RegA.RS1
 - Target configuration

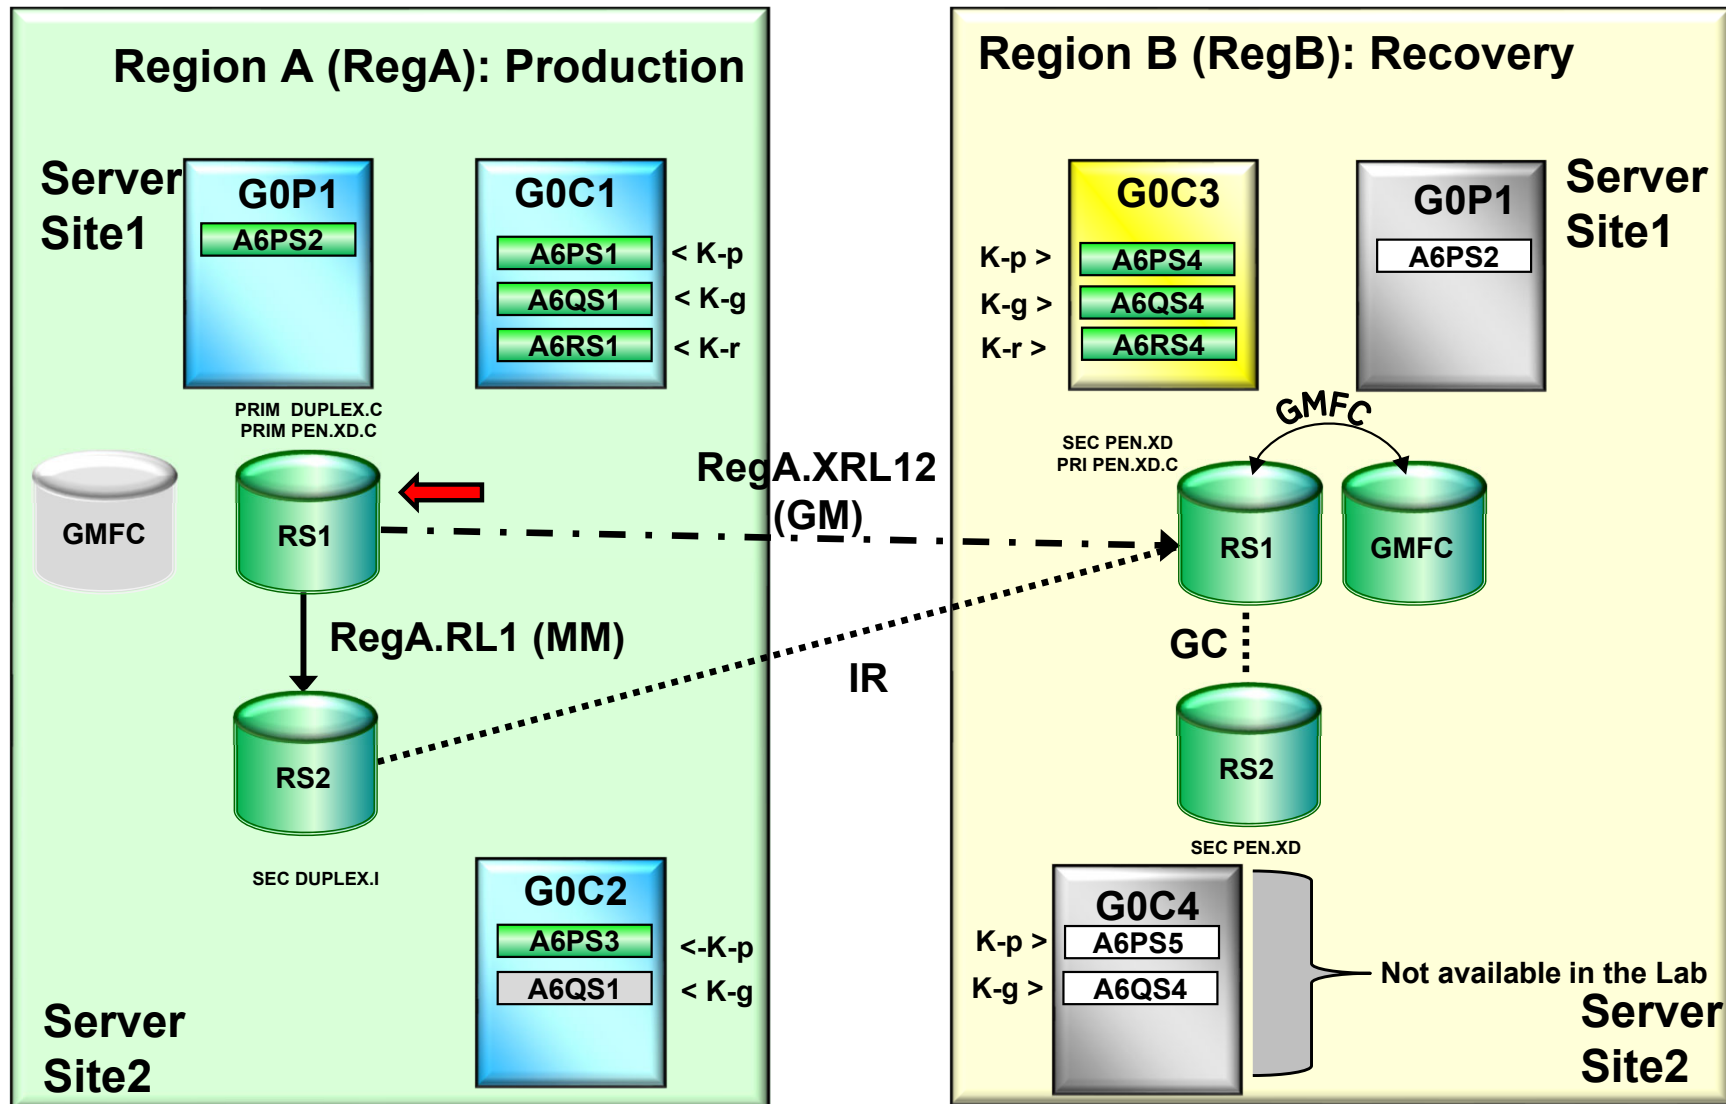

Switching from cascaded to multi-target configuration

- with GM primary disk in RegA.RS2

- Starting configuration

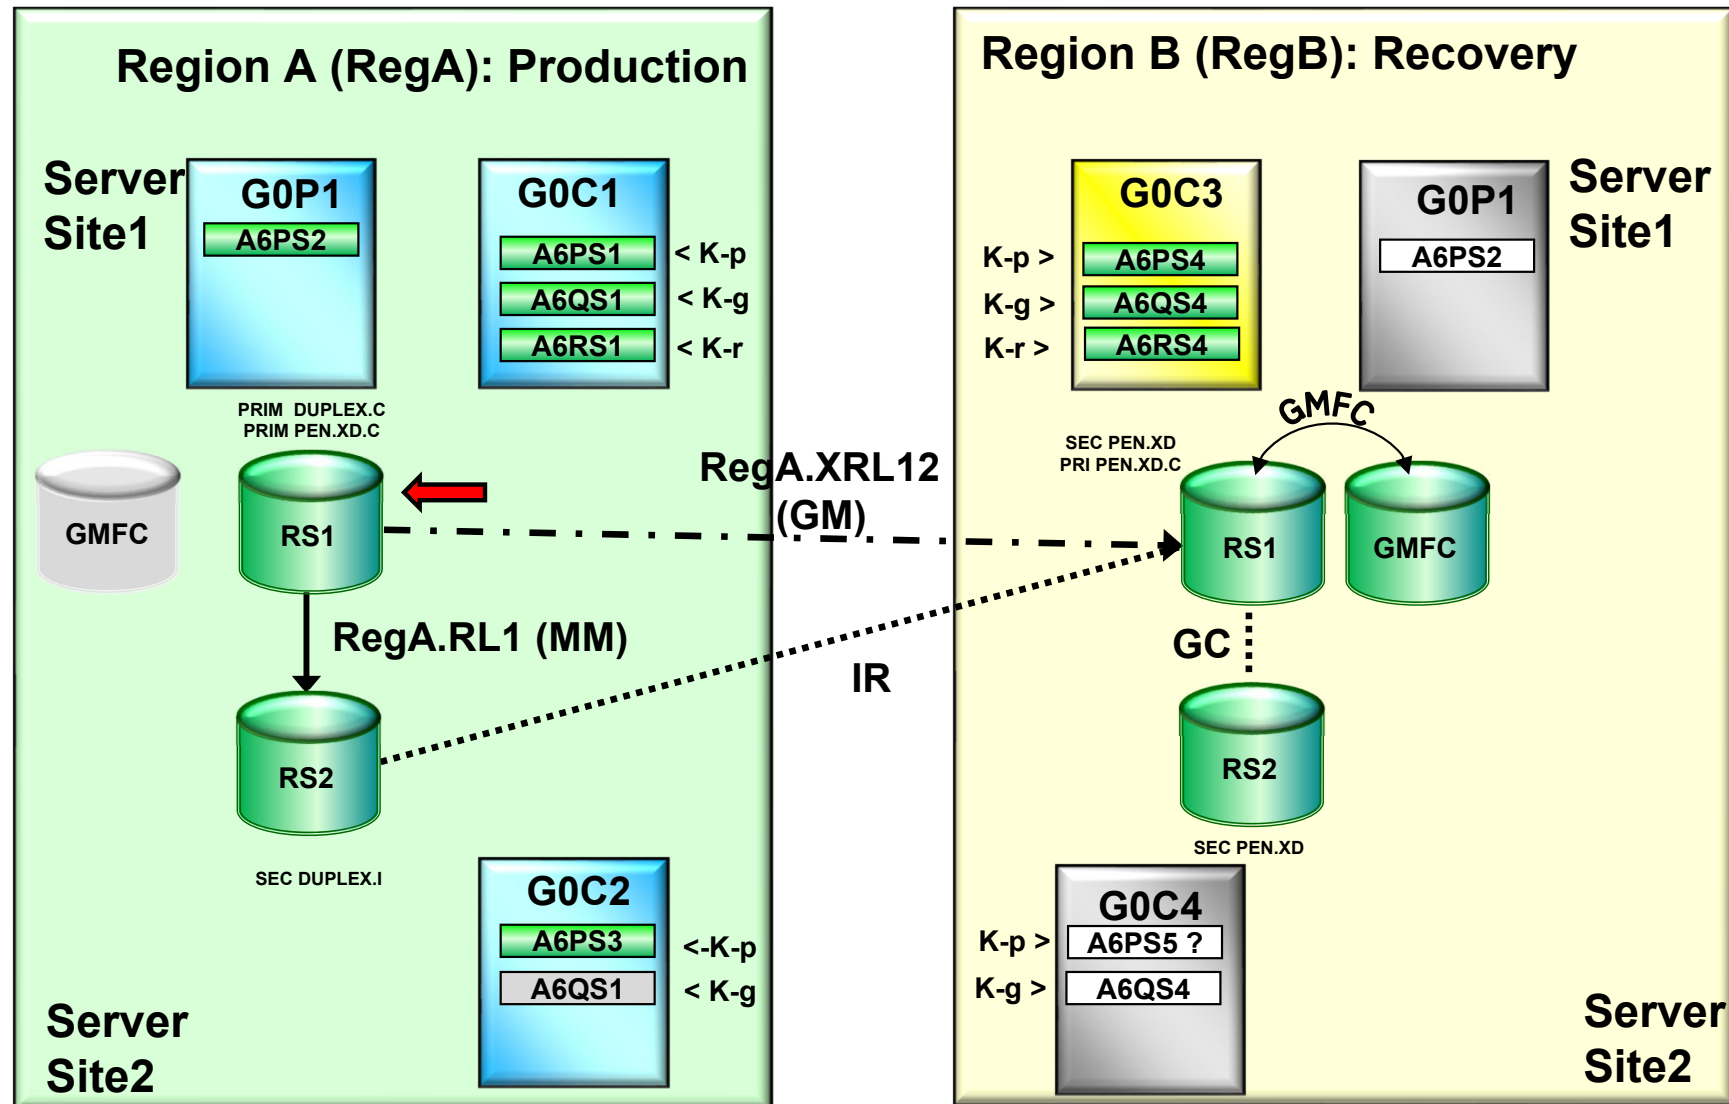

Switching from multi-target to cascaded configuration

- with GM primary disk in RegA.RS2

- High level steps

- Run MGM4SITE_RESTORE procedure
- Move Kg-Sys to G0C1


- Used scripts:

- Control script with MGM4SITE_RESTORE procedure

Switching from cascaded to multi-target configuration

- with GM primary disk in RegA.RS2

- Starting configuration

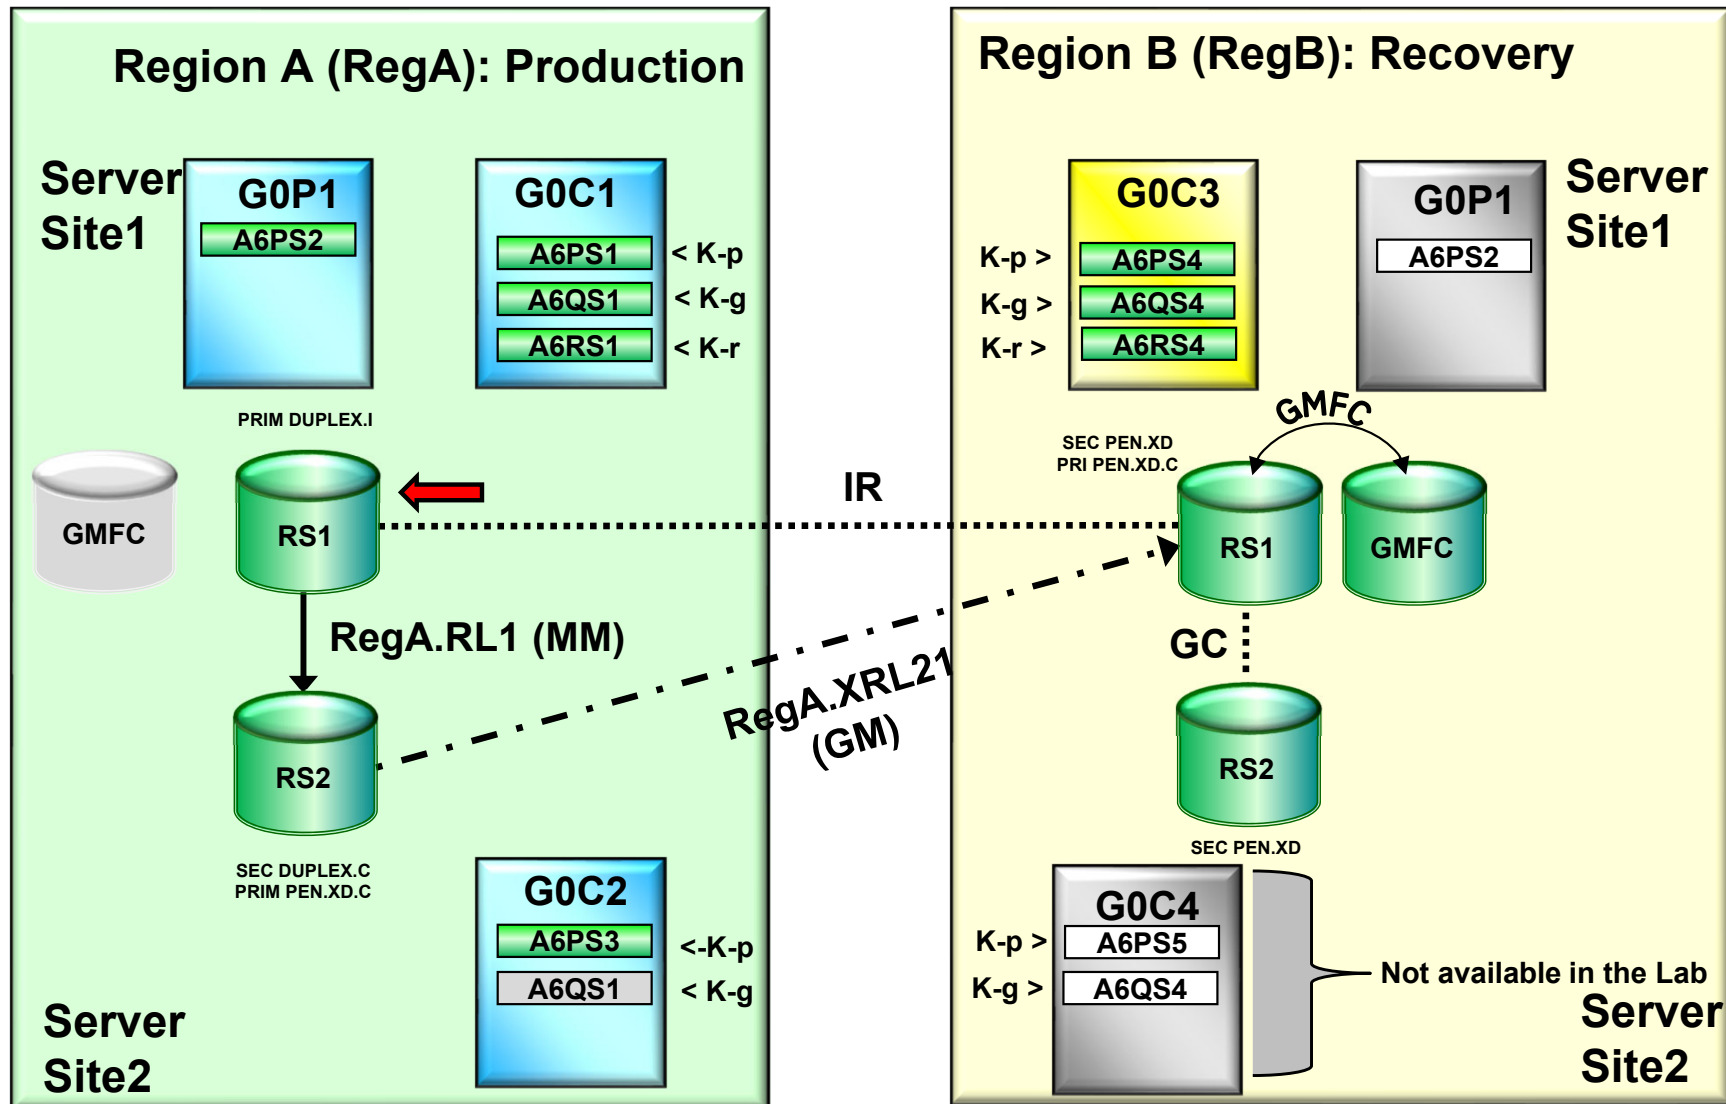

END OF LECTURE