
HIV protease with saquinavir

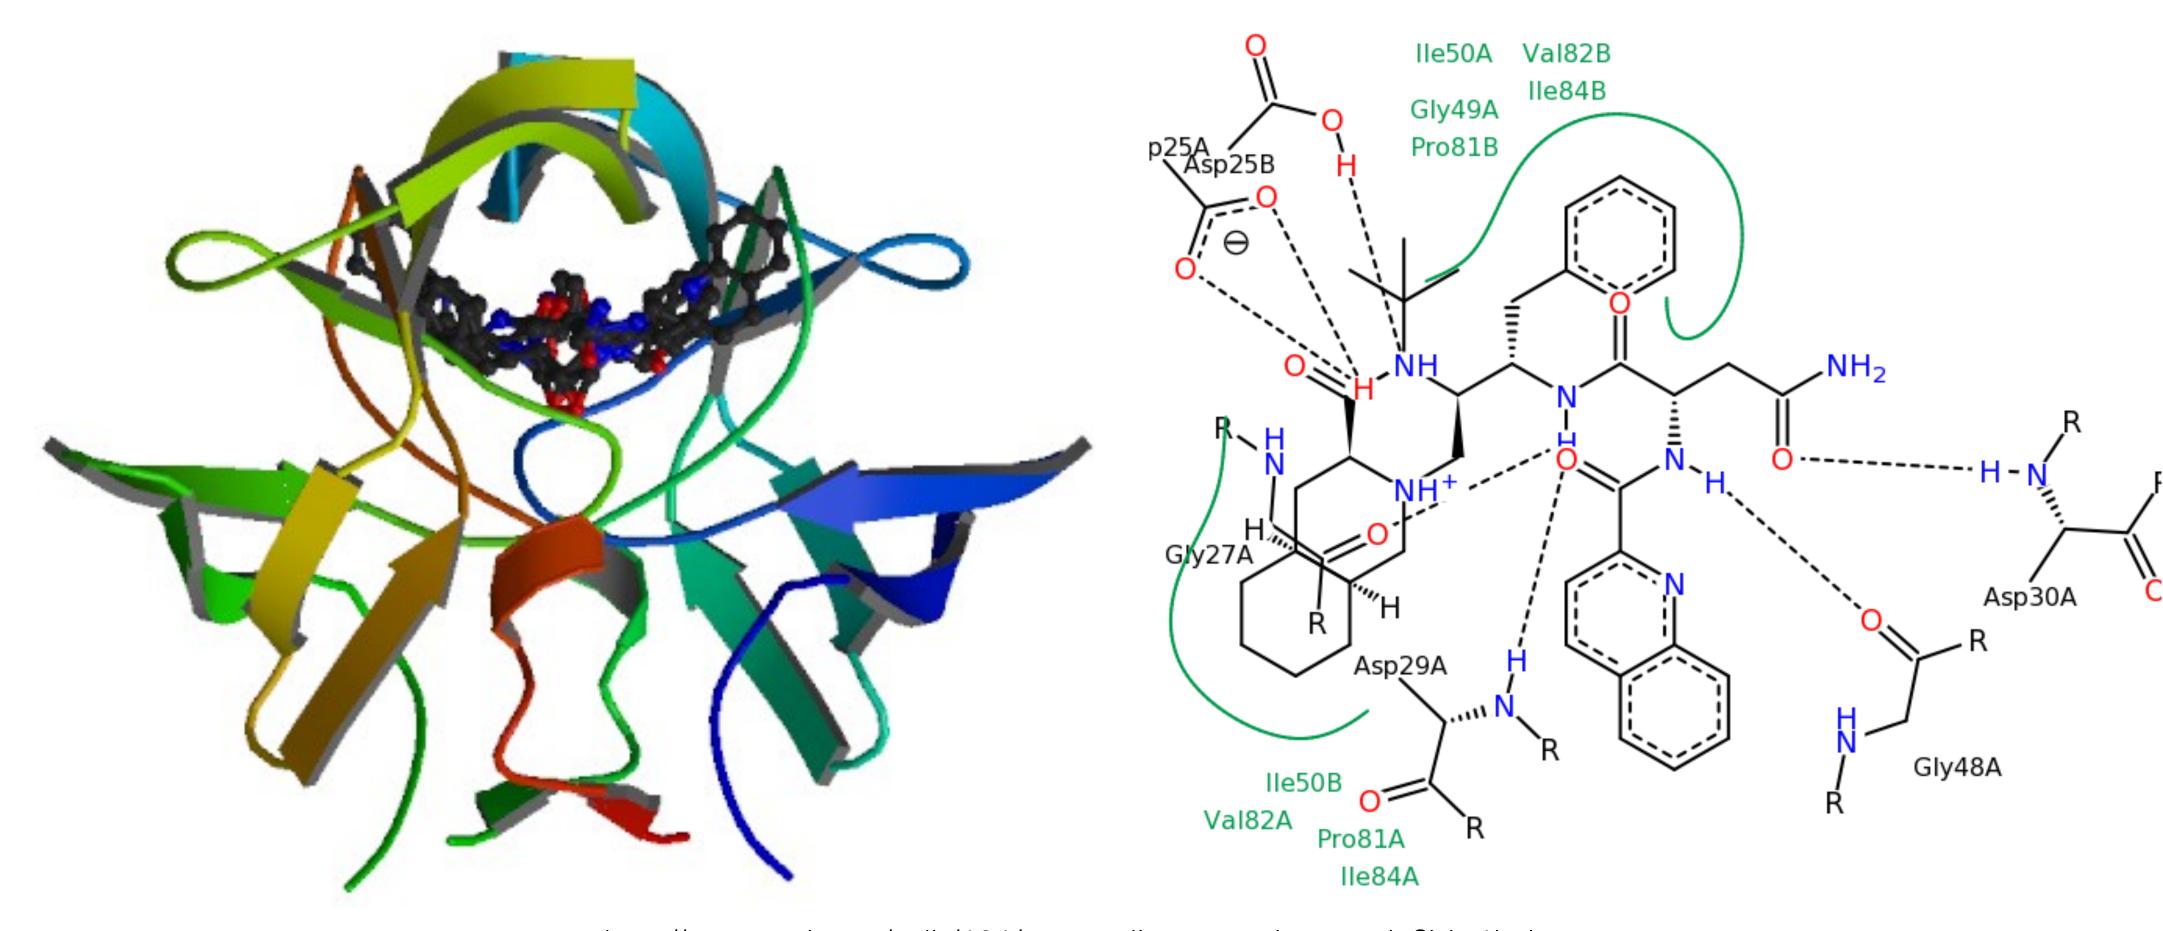


http://www.rcsb.org/pdb/101/motm_disscussed_entry.do?id=1hxb

Most drugs are small molecules that specifically interact with the folded structures

HIV protease drugs often cause a flap to fold over the active site


Most drugs are small molecules that specifically interact with the folded structures

HIV protease with saquinavir

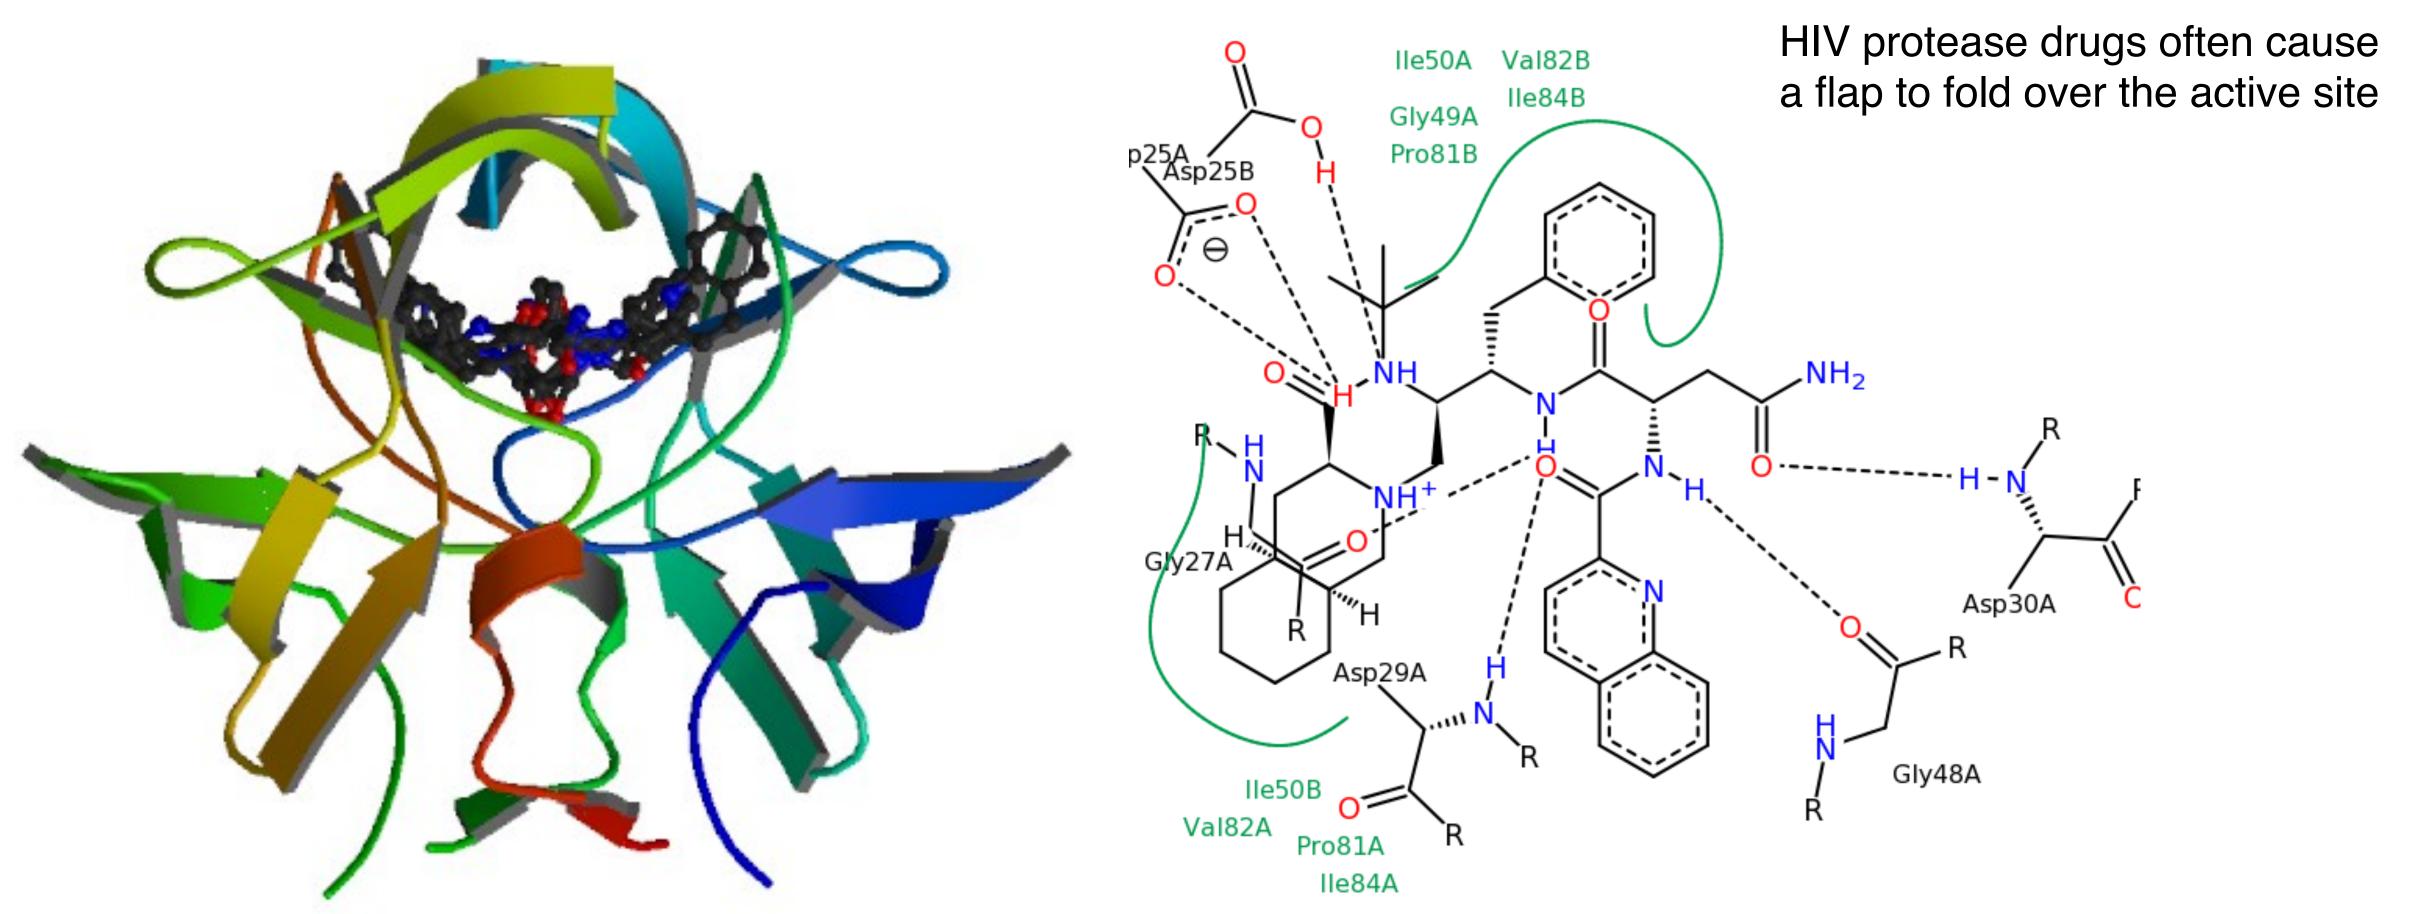

http://www.rcsb.org/pdb/101/motm_disscussed_entry.do?id=1hxb

Most drug-target interactions are noncovalent

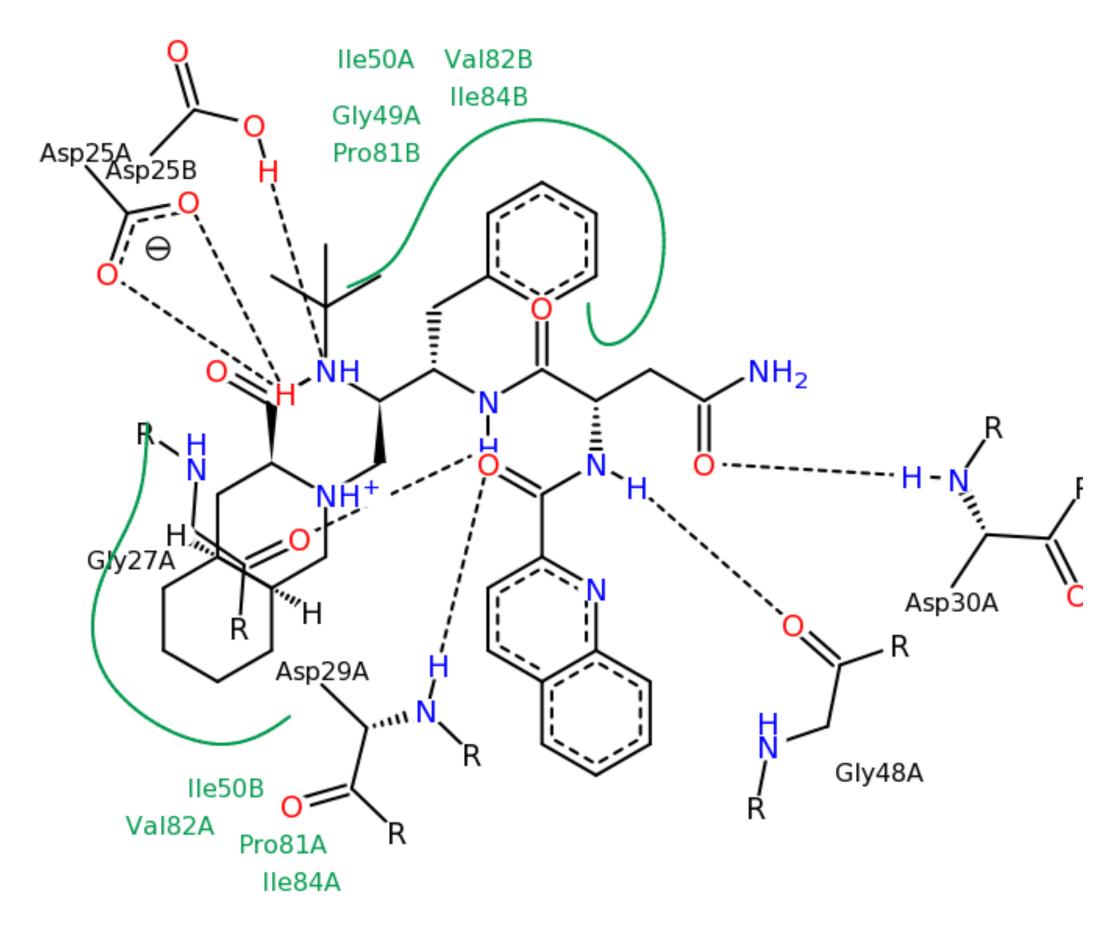

http://www.rcsb.org/pdb/101/motm_disscussed_entry.do?id=1hxb