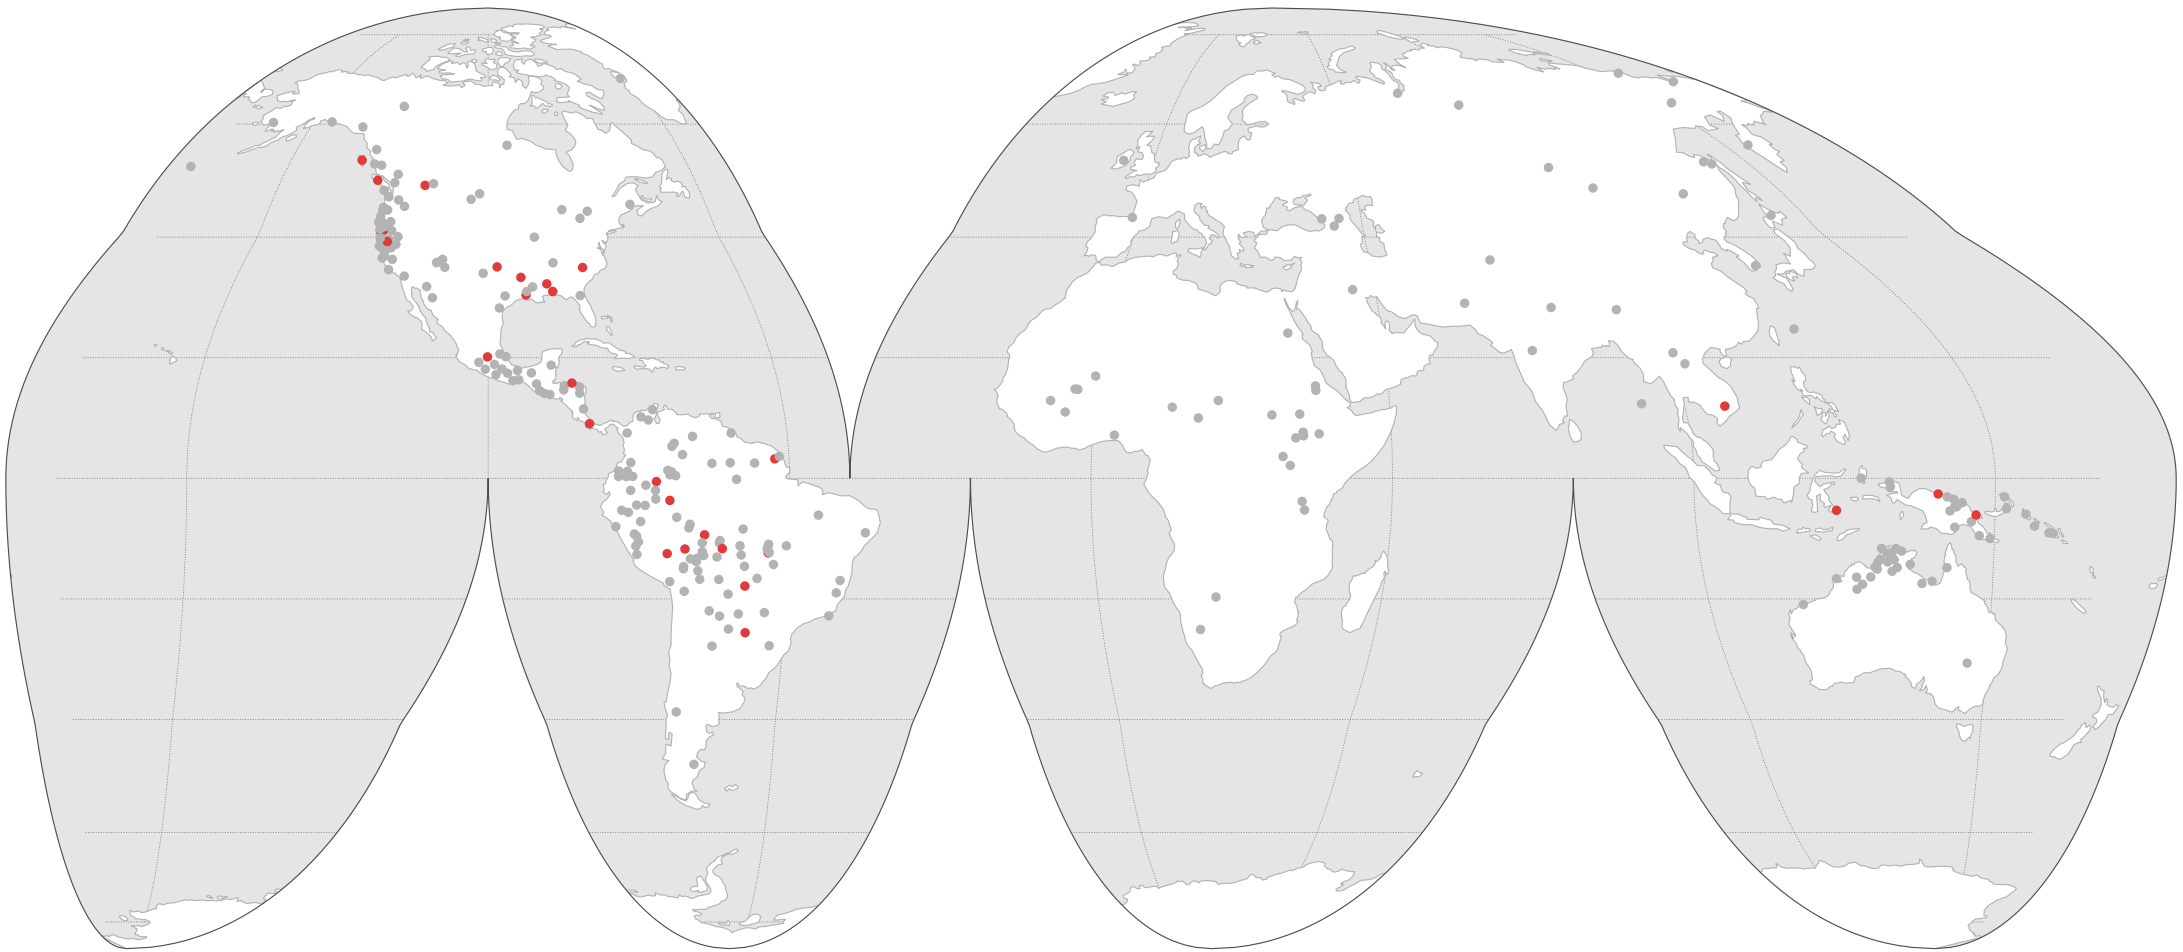

If 2sg is distinct from 2pl (i.e. if <no> to Ppron−08a),
can the same form be used for 3sg (or minimal) and 3pl (or
augmented) contexts?

- no
- yes