

# Exercise 2 - Add System Actions



Before you begin this lab exercise, please make sure you have read the course content for Step 2: Adding System Action.

In this exercise, you will complete the following steps to become familiar with adding a system action:


- Add Action



Before you begin the steps below, complete the below actions:

- Open a new browser and navigate to <https://webhook.site>
- Copy your **Unique URL** (you will need this for a step in this exercise)

## 1. Select System

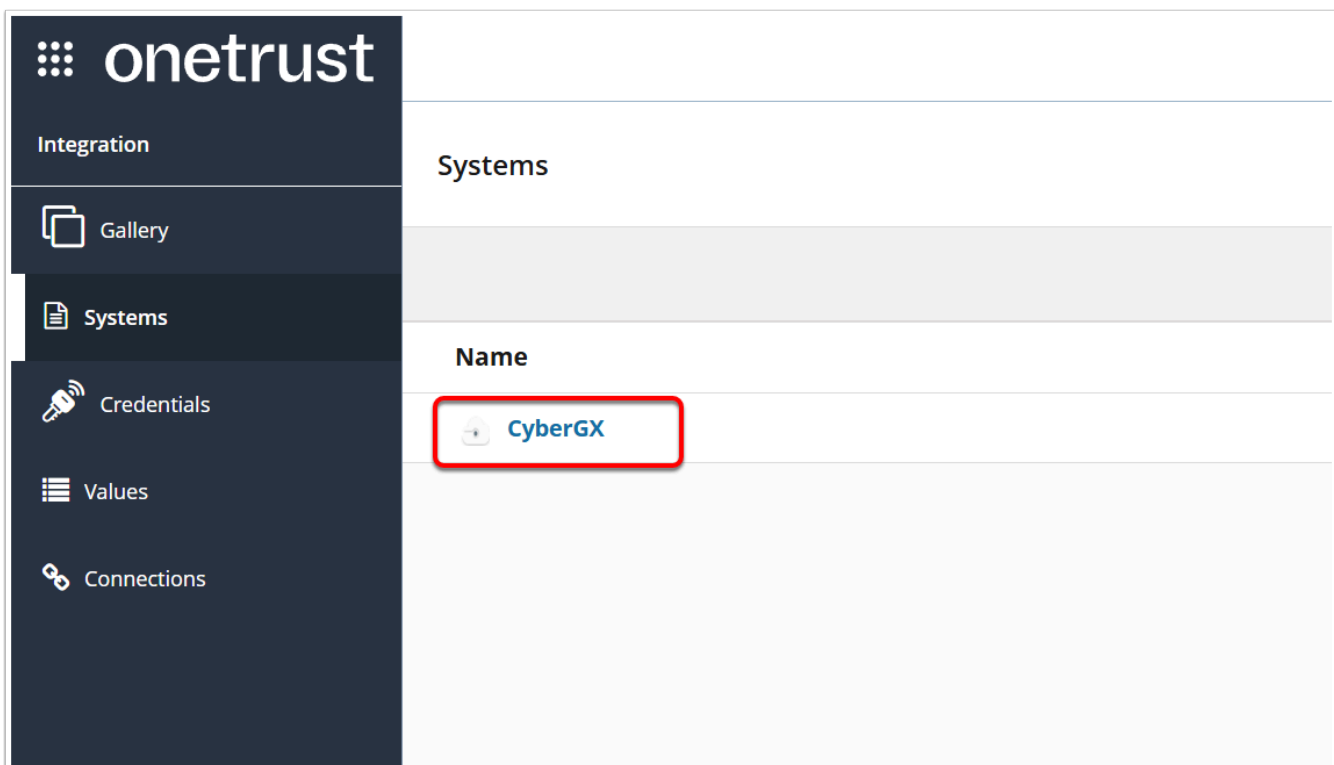

From the **Systems** screen, select **CyberGX**, (created earlier)

## 2. Add Action

The screenshot shows the 'Add Action' form in the OneTrust interface. The form is titled 'Add Action' and has a tabbed interface with 'Actions' selected. The form contains the following fields and sections:

- Action Name:** A text field with the value 'POST - send data to webhook.site'.
- Description:** A text area with the value 'This action posts data to webhook.site endpoint'.
- Endpoint Path:** A text field with the value 'https://webhook.site/251ddd83-f241-4e3c-9f6e-b7e52cbc9405'.
- Method:** A dropdown menu with the value 'POST'.
- Header Section:** A section titled 'Enter Optional Header to Include' with a table for Key and Value. The Key is 'Content-Type' and the Value is 'application/json'.
- Payload Type:** A dropdown menu with the value 'JSON'.

Numbered callouts 1 through 8 highlight specific steps: 1. Actions tab, 2. Add Action button, 3. Action Name field, 4. Description field, 5. Endpoint Path field, 6. Method dropdown, 7. Header section, 8. Payload Type dropdown.

1. From the **Systems Details** page, click the **Actions** tab
2. Click **Add Action**
3. In the **Action Name** field, type **POST - send data to webhook.site**
4. In the **Description** field, type **This action posts data to a webhook.site endpoint**
5. In the **Endpoint Path** field, paste the **Unique URL** copied from **webhook.site** (*do not copy the url in the image*)
6. In the **Method** field, select **POST**
7. In the **Header** section, select **Content-Type** for **Key** and type **application/json** for the **Value**



**Note:** Headers are optional, and can be added if applicable to the use case.

8. In the **Payload Type** field, select **JSON**

### 3. Add Action (continued)

Request Body

\* Payload Type **1**

JSON

Response Body **2**

```
{
  "dataSent": "true"
}
```

Cancel **3** Add

1. In the **Payload Type** field, select **JSON**
2. In the **Response Body**, type the below

```
{
  "dataSent": "true"
}
```

3. Click **Add**



Request body can be added if applicable to the use case. In this example, it is intentionally blank.