

Exercise 3 - Configure System Credentials




Before you begin this lab module, please make sure you have read the course content for **Step 3: Configuring System Credentials**.

In this exercise, you will complete the following steps to simulate adding a system credentials:

- Add Credentials

1. Navigate to Credentials

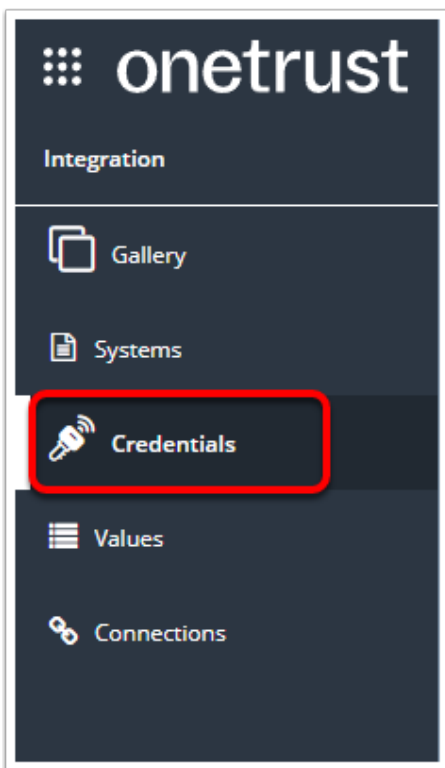

From the **Integration** menu, select **Credentials**

2. Select System

The screenshot shows the 'Credentials' management interface. At the top right, there is an 'Add New' button. Below it is a table with columns: 'Credential Name', 'Connector Type', 'Authentication Type', and 'System'. A modal dialog titled 'Select System' is open in the center. The dialog contains a search bar with 'CyberGX' entered. At the bottom right of the dialog, there are 'Cancel' and 'Next' buttons. Numbered callouts (1, 2, 3) highlight the 'Add New' button, the 'Select System' field, and the 'Next' button respectively.

1. Click **Add New**
2. In the **Select System** field, choose **CyberGX** (*created earlier*)
3. Click **Next**

3. Add Credential Details



As you complete this step, you will notice an updated **Create Credentials UI** that is different from the lab screen shot. Please note that although different, the content fields are still the same and can be matched up. For More information on the updated UI and creating credentials, please visit this [MYOT](#) article.

Credential Details

Enter the name and descriptions of the credentials.
[See guide on configuring credentials.](#)

*** Credential Name** 1
 [TPRM] - Cyber GX UAT Credentials

Description
 Enter Description

*** Connector Type** 2
 Web App

*** Auth Type** 3
 Basic

*** Protocol** Hostname 4
 HTTPS uat.cybergx.com

Test URL 5
 https://uat.cybergx.com/assets

1. In the **Credential Name** field, type **[TPRM] - Cyber GX UAT Credentials**
2. In the **Connector Type** field, select **Web App**
3. In the **Auth Type** field, select **Basic**
4. In the **Hostname** field, type **uat.cybergx.com**
5. In the **Test URL** field, type **https://uat.cybergx.com/assets**

4. Add Credential Details (Contd)

Enter Default Headers to Include

Key	Value

* User Name **1**
TestUser

Password **2**
OneTrust

Send Credentials In **3**
HTTPS Headers

MTLS Enabled
Use mutual TLS authentication to secure all connections that use these credentials. ☐

Server Certificate Chain **4**

Classify Credential as Sensitive ☐
Enable if this credential is going to be used with a sensitive workflow or retrieve potentially sensitive data. When enabled, only users with the permission 'Manage Sensitive Classification' will be able to access this credential.

Cancel Save

1. In the **User Name** field, type **TestUser**
2. In the **Password** field, type **OneTrust**
3. In the **Send Credential In** field, select **HTTPS Headers**



Depending on the use case and the credentials being configured, **MTLS** can be enabled. For this exercise it is disabled.



Note: When **Classify Credentials as Sensitive** is enabled (*highlighted in blue*), only users with the permission "**Manage Sensitive Classification**" will be able to access this credential. For this exercise, this option is disabled.

4. Click **Save**



Note: The credential created in this exercise is not real, and any attempt to test it will yield a **"connection failed error"**