
Task1

The program creates a simple counter using a **Label** and a **Button**. The counter is initially set to 0. When the user clicks the **Increment** button, the program increases the counter value by 1. The updated counter value is then converted into text and displayed in the Label.

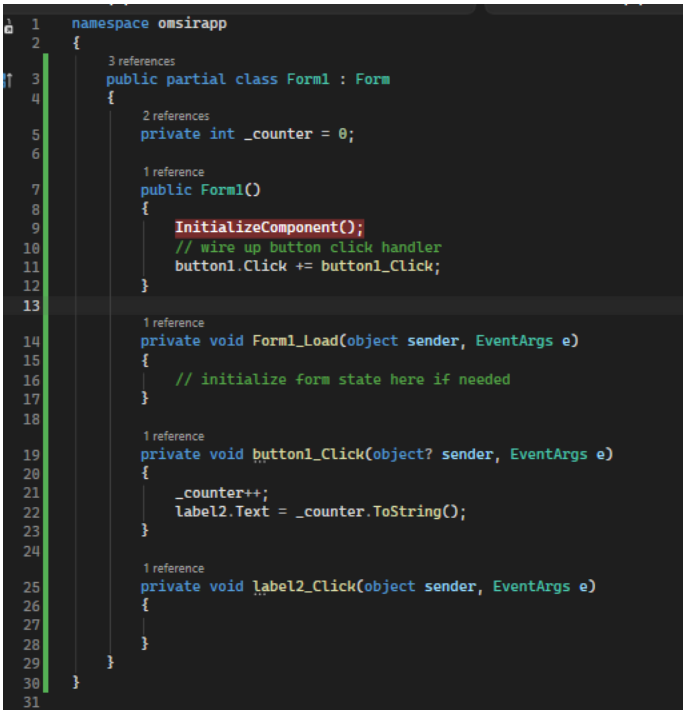

```
namespace omsirapp
{
    3 references
    public partial class Form1 : Form
    {
        2 references
        private int _counter = 0;


        1 reference
        public Form1()
        {
            InitializeComponent();
            // wire up button click handler
            button1.Click += button1_Click;
        }

        1 reference
        private void Form1_Load(object sender, EventArgs e)
        {
            // initialize form state here if needed
        }


        1 reference
        private void button1_Click(object? sender, EventArgs e)
        {
            _counter++;
            label2.Text = _counter.ToString();
        }

        1 reference
        private void label2_Click(object sender, EventArgs e)
        {

        }
    }
}
```

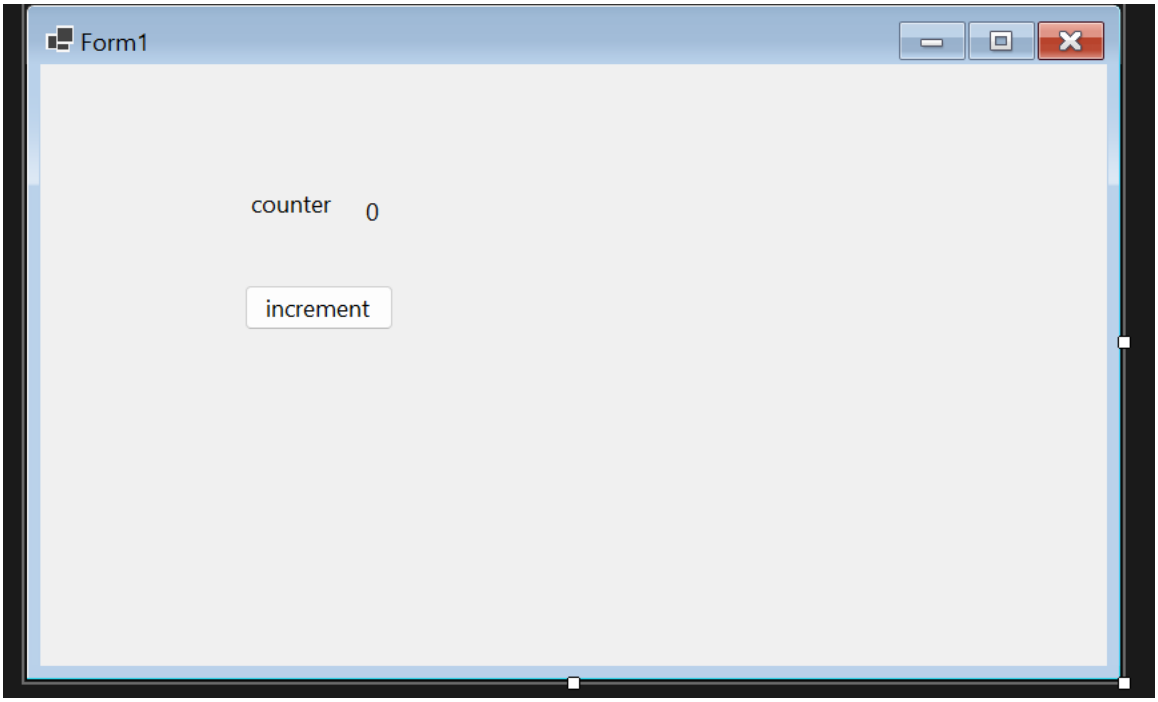




When the user clicks the **Increment** button, the value increases by one.

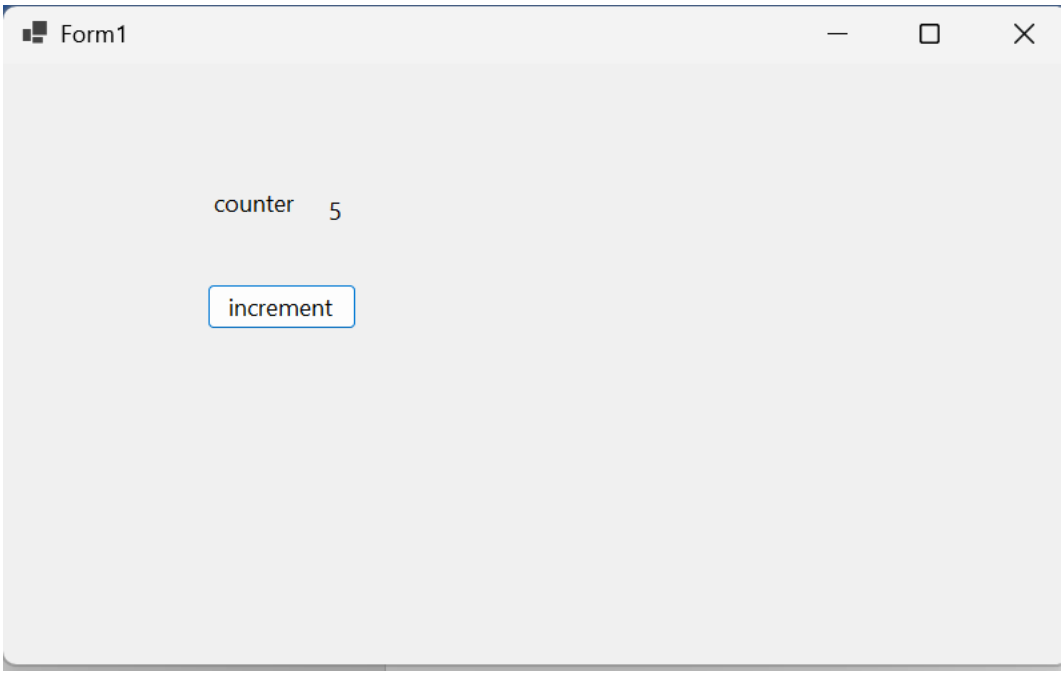



Task 2

The program allows the user to enter their name into a **TextBox**. When the user clicks the **Display** button, the program takes the name entered in the TextBox and stores it in a string variable. It then combines the name with "Hello, " and displays the complete message in a Label.

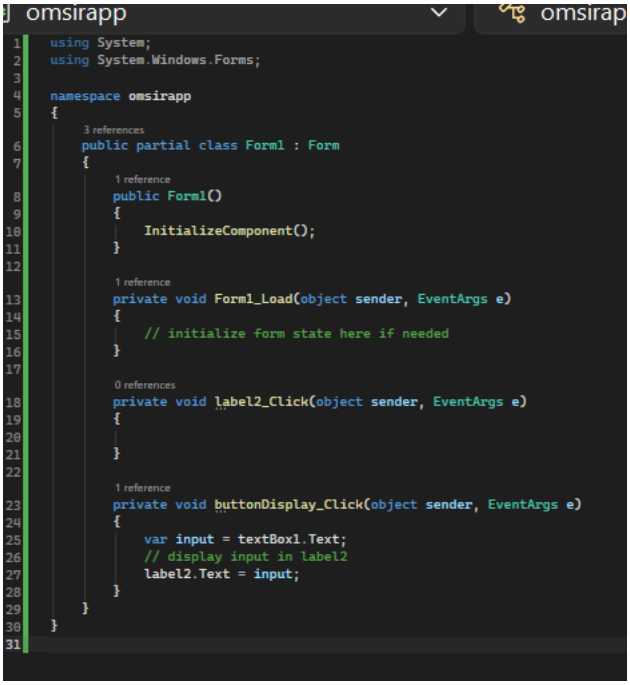
omsirapp
omsirap
using System;
using System.Windows.Forms;
namespace omsirapp
{
3 references
public partial class Form1 : Form
{
1 reference
public Form1()
{
InitializeComponent();
}
1 reference
private void Form1_Load(object sender, EventArgs e)
{
// initialize form state here if needed
}
0 references
private void label2_Click(object sender, EventArgs e)
{
}
1 reference
private void buttonDisplay_Click(object sender, EventArgs e)
{
var input = textBox1.Text;
// display input in label2
label2.Text = input;
}
}
}

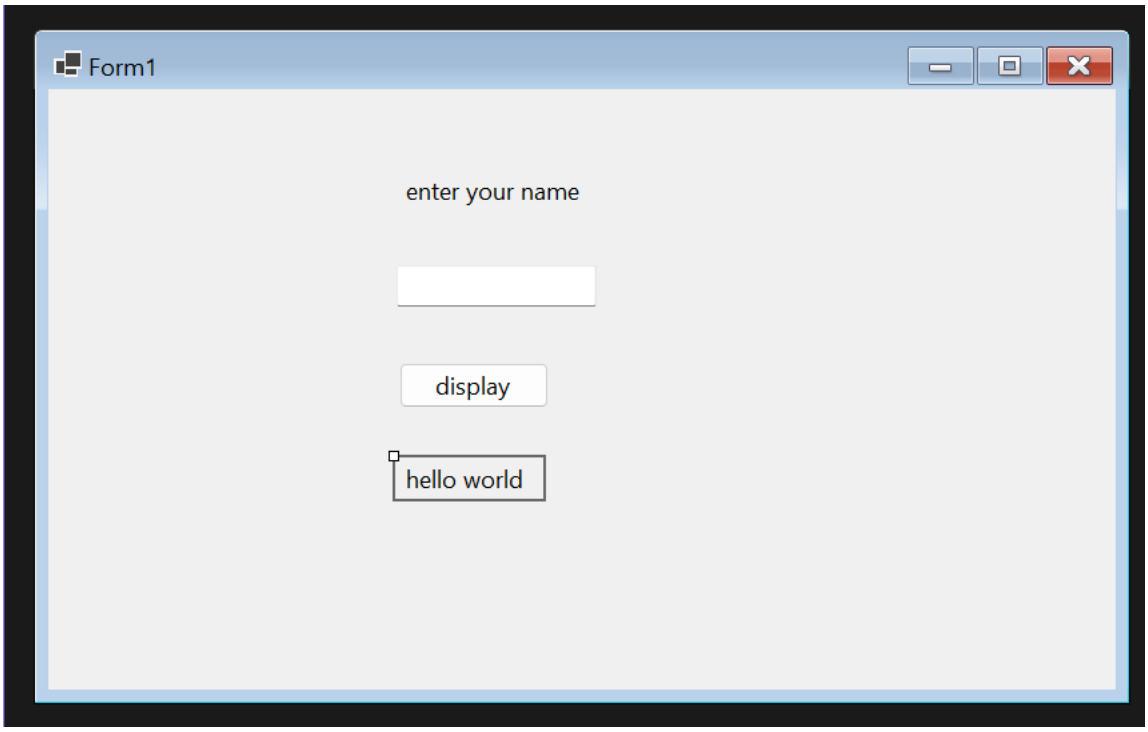



when you write down your name , it will display name david

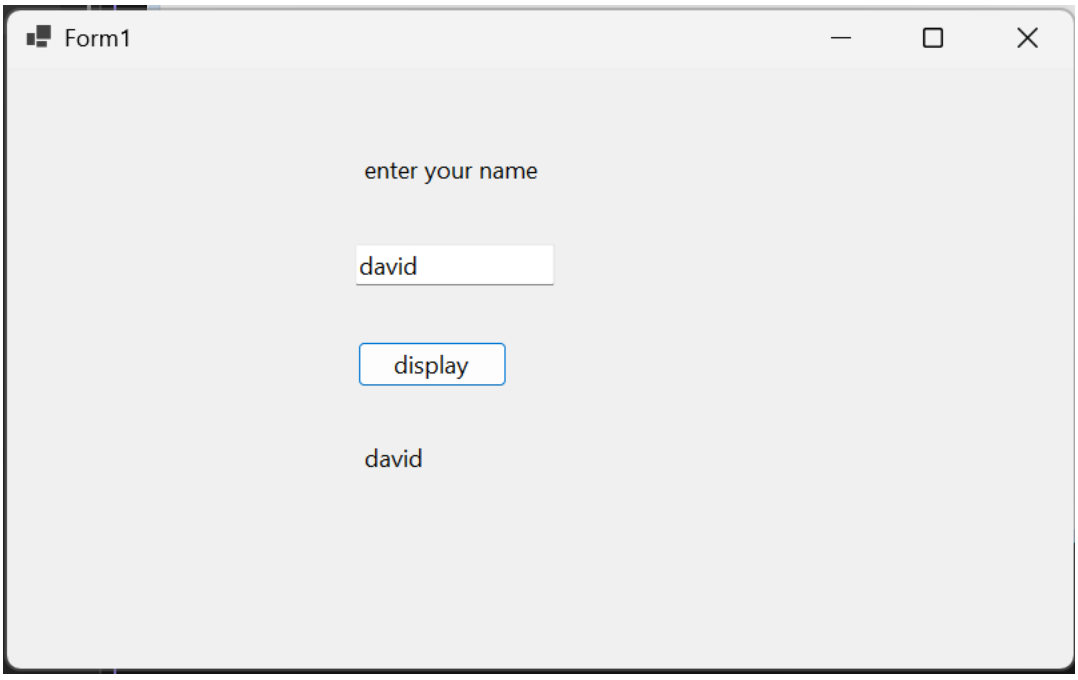

Task 3

The program allows the user to enter three marks into three different **TextBoxes**. When the user clicks the **Calculate Average** button, the program reads the three values and converts them from text into numbers using Convert.ToDouble().

It then calculates the average by adding the three marks and dividing the total by 3. Finally, the calculated average is displayed in the result Label.

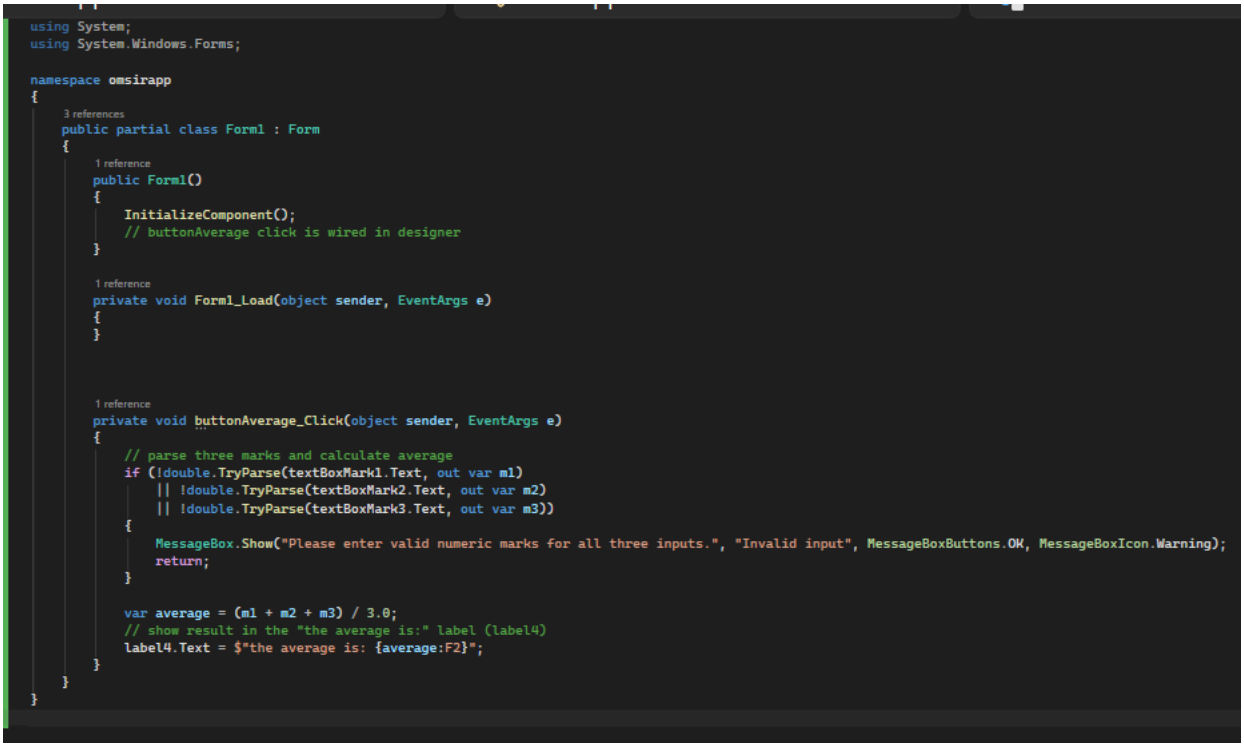

```
using System;
using System.Windows.Forms;


namespace omsirapp
{
    3 references
    public partial class Form1 : Form
    {
        1 reference
        public Form1()
        {
            InitializeComponent();
            // buttonAverage click is wired in designer
        }

        1 reference
        private void Form1_Load(object sender, EventArgs e)
        {
        }




        1 reference
        private void buttonAverage_Click(object sender, EventArgs e)
        {
            // parse three marks and calculate average
            if (!double.TryParse(textBoxMark1.Text, out var m1)
                || !double.TryParse(textBoxMark2.Text, out var m2)
                || !double.TryParse(textBoxMark3.Text, out var m3))
            {
                MessageBox.Show("Please enter valid numeric marks for all three inputs.", "Invalid input", MessageBoxButtons.OK, MessageBoxIcon.Warning);
                return;
            }

            var average = (m1 + m2 + m3) / 3.0;
            // show result in the "the average is:" label (label4)
            label4.Text = $"the average is: {average:F2}";
        }
    }
}
```

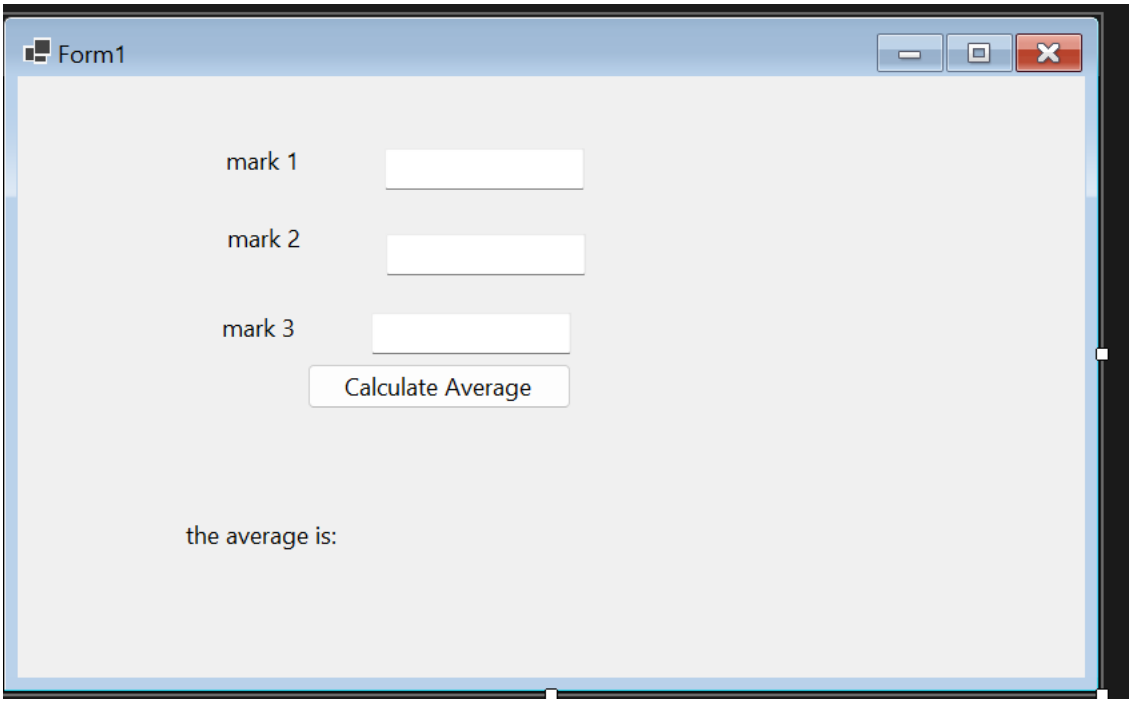


This shows that the program successfully reads the three inputs, performs the required calculation, and displays the average on the form.

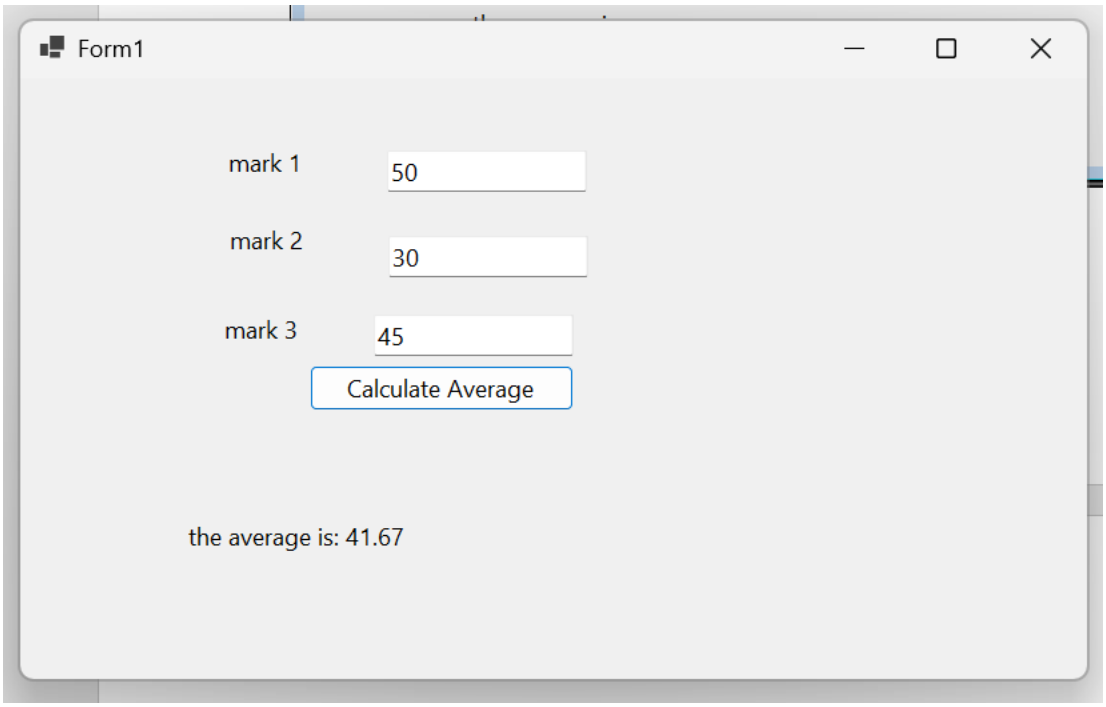
Form1
mark 1
50
mark 2
30
mark 3
45
Calculate Average
the average is: 41.67