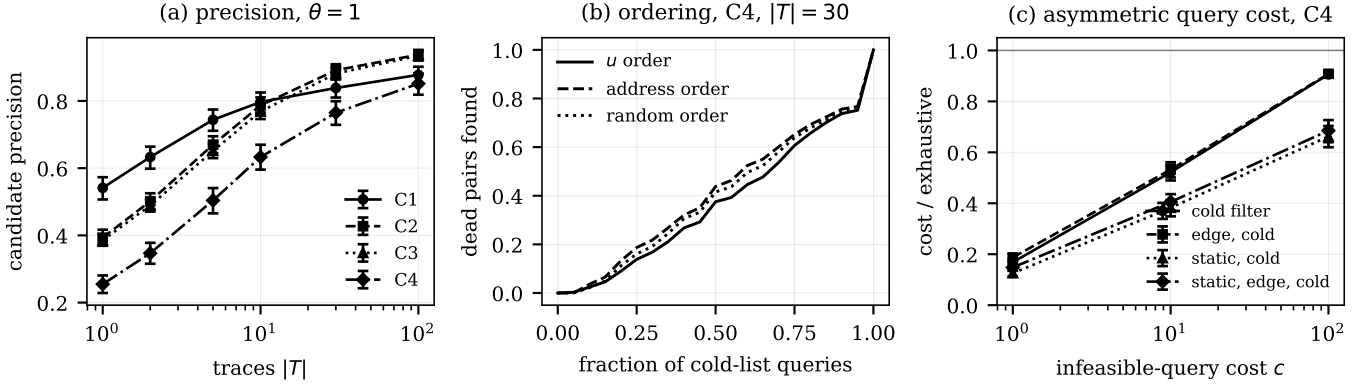
(a) precision, $\theta = 1$
candidate precision
traces $|T|$
C1
C2
C3
C4
(b) ordering, C4, $|T| = 30$
dead pairs found
fraction of cold-list queries
u order
address order
random order
(c) asymmetric query cost, C4
cost / exhaustive
infeasible-query cost c
cold filter
edge, cold
static, cold
static, edge, cold