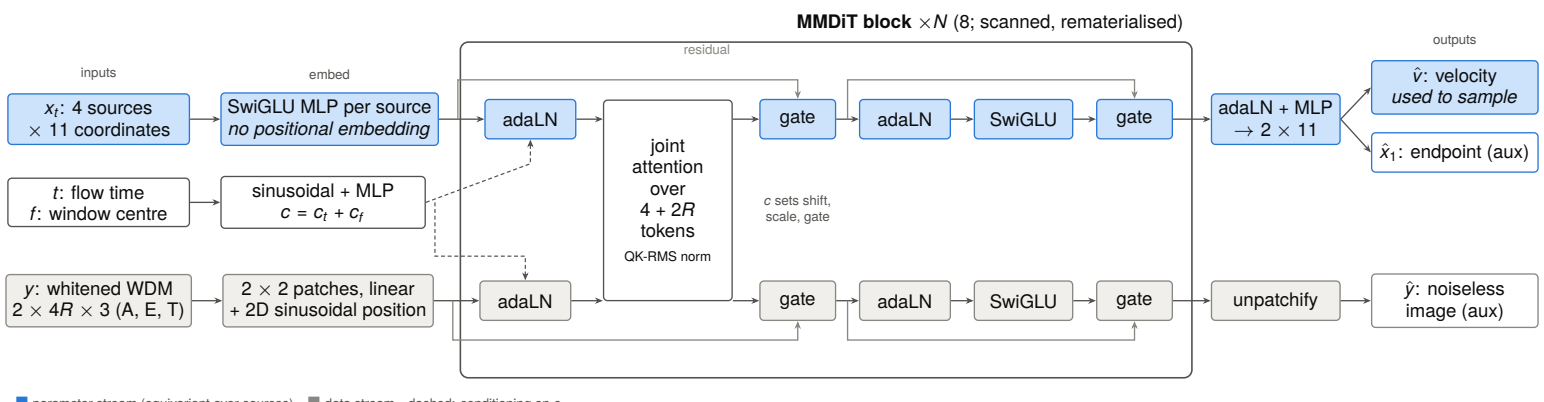

MMDiT block ×N (8; scanned, rematerialised)
residual
inputs
embed
outputs
x_t: 4 sources × 11 coordinates
SwiGLU MLP per source
no positional embedding
adaLN
joint attention over 4 + 2R tokens
QK-RMS norm
gate
adaLN
SwiGLU
gate
adaLN + MLP → 2 × 11
$\hat{v}$: velocity
used to sample
$\hat{x}_1$: endpoint (aux)
t: flow time
f: window centre
sinusoidal + MLP
$c = c_t + c_f$
c sets shift, scale, gate
y: whitened WDM
2 × 4R × 3 (A, E, T)
2 × 2 patches, linear
+ 2D sinusoidal position
adaLN
gate
adaLN
SwiGLU
gate
unpatchify
$\hat{y}$: noiseless image (aux)
parameter stream (equivariant over sources)
data stream
dashed: conditioning on c