Lab: Betty's Bakery

So far we've learned to structure and display content like text, images and video using HTML. The next topic is to learn how to take that HTML and create visual style for it such as defined fonts, colors and backgrounds using cascading stylesheets (CSS)..In this lab we will cover the basics of CSS while assisting our client Betty's Bakery. Betty's Bakery already has an established HTML webpage, but they want to add some 'pizazz' with visual style.


```
<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <title>Betty's Bakery</title>
</head>

<body>
    <h1>Welcome to Betty's Bakery</h1>

    <p>Started in 2001 Betty's Bakery is a local organic bake shop founded
    by Betty Boop, a long time member of the community. Betty started her
    bakery in the back of her kitchen and has since expanded to serving
    pasteries over the entire state. We pride ourselves on our great
    handmade, fresh ingredient bake goods. Stop by and say 'hi'.</p>

    <p>We serve: </p>
    <ul>
        <li> Sourdough Bread</li>
        <li> Rye Bread</li>
        <li> French Baguettes</li>
        <li> Croissants</li>
        <li> Cupcakes </li>
        <li> Donuts</li>
    </ul>
    <p>Here are a few of our local friends</p>
    <a href="https://www.ambrosiabakerysf.com/">Ambrosia Bakery</a>
    <br>
    <a href="https://www.arizmendibakery.com/">Arizmednibakery</a>
    <br>
    <a href="http://www.devilsteethbakingcompany.com/">Devil's Teeth
    Baking Company</a>
```

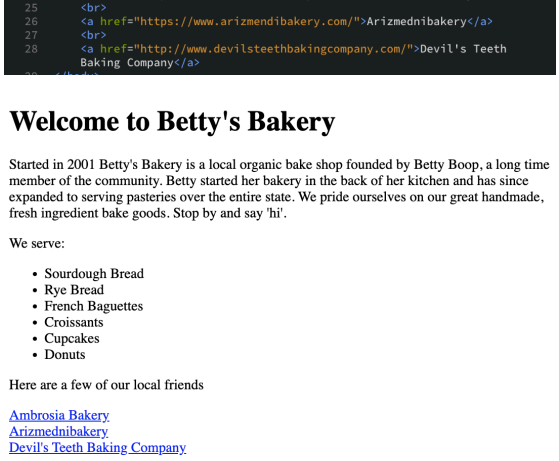

Download and Preview the Webpage

Begin by downloading *BettyBakery.zip* and upziping the folder. The folder should contain all the necessary files for this lab. Inside the root folder is a file called *bettybakery.html*. Open that file into your code editor and preview the file into a browser of your choice. When you preview the HTML file you'll see that the file includes: a heading about the bakery, a short paragraph history of the store and a list of the different breads and pastries they make.

Create a Cascading Stylesheet

To add a bit of style to this page we are going to create a CSS document that will eventually be connected to our HTML page. In your coding program create a new document and save it specifically as *style.css*.

Make sure to save the CSS document into the same folder as the HTML file. Also make sure your document has the '*.css*' extension at the end.

Write Basic CSS

Now that we have a document write the following:

```
h1 {
  color: red;
}
```



This is a CSS rule. It contains several parts: the *'h1'* is the selector, or the thing we want to select and change. This is referred to as a tag selector, since we are selecting part of our webpage based on HTML tags.

Inside the brackets is the CSS declaration. The first part, '*color*', is a CSS property, the second part *'red'* is the new value of that property. In other words what would happen is all *<h1>* HTML tag

© Copyright David Hurwich

should become the color red.

Save and preview your HTML document. You'll notice that when you refresh you do not see the change yet. Why is that? We wrote the CSS code, right? The reason it is not working is because we need to connect the HTML file to the CSS file that we created. The CSS file stores the visual information, without some form of connection the HTML document has no access to it and therefore can't use it. For the HTML document to access the CSS we'll need to attach it.


Attach the CSS Document

To attach a CSS document to an HTML document open the HTML document. Inside the *<head>* section put the following:

```
<link rel="stylesheet" href="style.css">
```



Save and refresh the *bettybakery.html* file into a browser and you should see the title text turn red. If this does not occur check that the CSS file is inside the same folder as the HTML file. Also check that stylesheet file name matches what you wrote in the *<link>* code.

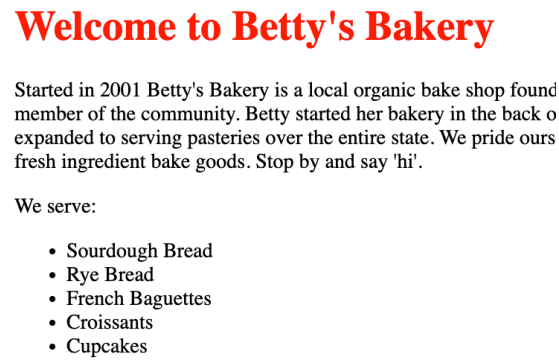

Stylize Text

Now that our CSS document is attached, let's begin to edit and stylize the typography.

Let's change the typography for our title. Add the following to our existing code:

```
h1 {
    color: red;
    font-family: 'Courier', monospace;
}
```



Save and preview and you should see the type for the title change formats. *font-family* allows you set your own typeface choice. In this case we are going to use Courier.

Now that we have a color and typeface set, let's set a type size. Use the css property *font-size* to set the h1 to a font size of 42pt. Note that you can use other measurement units like pixels and metric as well.

© Copyright David Hurwich

More Type Stylization

Now that we have our heading stylized, let's stylize the general type for the webpage. The general type in the webpage are the paragraphs, so we'll use the '*p*' as the selector.

```
p {
}
```

Set the CSS rule to have the paragraph text be red, with a font-family of Courier and a font-size of 14pt. Save and preview

Now let's add *line-height* or the vertical space between multiple lines of text. Line-height is the same as the leading property in programs layout programs like Adobe Illustrator or Adobe InDesign. Set the *line-height* to 18pt;



Hyperlink Stylization

Now that the text is stylized, let's style the hyperlinks. To dot hat we'll use the '*a*' selector.


```
a {

}
```

Let's also set the font color to red, but let's use a specific shade of red. To do this we are going to use a hexadecimal value.

A hexadecimal value is a six digit code of numbers and the letters A through F. Hexadecimals values are specific call signs that allow us to use a very specific shade of a color You can find hexacimal values in most graphic design program that allow you to choose specific colors. Set your hyperlinks as the following:

```
a {
   color: #ad0c00;
}
```

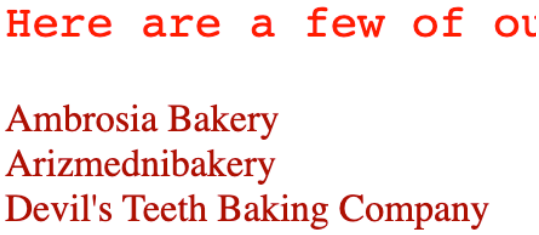

Refresh and you'll link color will change.

Now that we have a new color let's remove those unsightly underlines for hyperlinks. Use the CSS property '*text-decoration*' and set the value to '*none*'. This will remove the default underlines for hyperlinks.

© Copyright David Hurwich


List Styling

We can also style lists using CSS! We can choose what type of bullet or numbering system style we want to use. For this client she has an unordered list of pastries, so let's use the '*ul*' selector.

```
ul {
}
```

We are going to use the *list-style-type* CSS property. This let's us choose the bullet or number type style. Let's set the value to '*circle*' or circular bullets.

Save and Preview

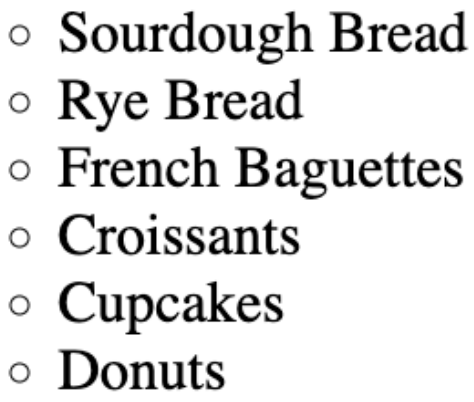

Backgrounds

Now that we've stylized the type let's begin to stylize the background of the webpage. To add a background color or image to their webpage we'll need to select the *<body>*. The *<body>* represents the entire visual page, so let's use the body selector.

```
body {

}
```

Now let's apply a background image to the page by using the *background-image* property. We'll then use an image we have in our files as the background image.

```
body {
    background-image: url(bakerybackground.jpg);
}
```

The *url* function in our CSS will reference and get the *bakerybackground.jpg* image we have in our root folder. The image will then be applied to the background of the webpage and be tiled over and over like wallpaper or wrapping paper.

Save and preview and it should look roughly like the image on the right.



© Copyright David Hurwich

Create a Class

Betty wants to have a yellow background on her menu to indicate if something is gluten free or not. Sometimes you don't want to have a CSS rule apply to EVERY instance of that the HTML tag. For instance, maybe you want to style the FIRST paragraph, but not EVERY paragraph. Unfortunately, when you use a tag selector you must apply the same visual style to every instance of that HTML tag. To create a CSS rule that applies to a specific item you should create a '*class*'. A CSS class is a selector that you the developer create and use. The syntax looks like this:

```
.special {

}
```



CSS classes always start with a period. You can then label it whatever name you want as long as there are no spaces, no special characters like !,$,#,@, and it does not start with a number.

For this class let's set the *background-color* to yellow as the following:


```
.special {
   background-color: yellow;
}
```



Save and preview. You'll notice that the CSS class did not seem to affect your webpage. That is because CSS classes need to be applied in the HTML code itself, not just written in the CSS document.

Open the HTML page and find the first list item marked '*sourdough bread*'. Add the *class* attribute to the *<li>* and set it to special, like this:

```
<li class="special"> Sourdough Bread </li>
```

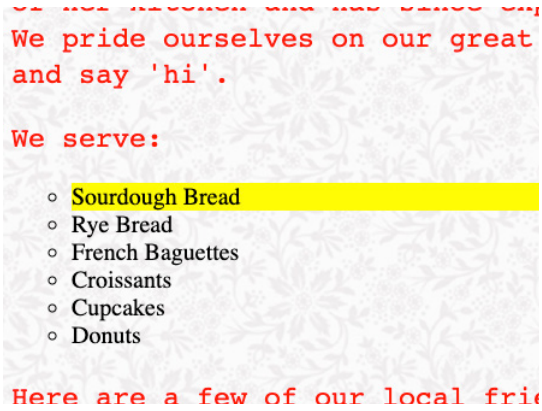

The class attribute allows you to apply a CSS class that you've created in your CSS. In this case the class is called '*special*'. There is no need to repeat the period as the period is only necessary when creating the class in the CSS document, not when calling it in the HTML.

Save and preview and your page should look roughly like the image on the right. Apply the *special* class to two other items in the menu,

© Copyright David Hurwich

Submit

Submit the folder will all of the necessary files as a zipped file to Canvas. Make sure your .zip file is labelled with your name.

Bonus (Not required)

Go further with adding typographical and background CSS properties to the webpage.

Use *http://www.w3schools.com* to look up the following CSS properties. Add them within your CSS document. Feel free to set your own values.

- *letter-spacing*
- *text-transfor*
- *font-style*
- *text-indent*

In addition, use the CSS property *list-style-image* to set create a custom bullet image for the list of baked goods. Use *cupcake.png* in the root folder as the custom icon.

© Copyright David Hurwich