

What Physical Layout Determines in a Document Store:

Capability and Index Currency, Not Latency

Evidence from seven measurement campaigns, with the artefact and its own refutations

David Leconte

IBM France

github.com/davidleconte/shredding-cost-hcd-mongodb

19 September 2026

Abstract

A document database may store each record whole or decompose it into typed columns with automatically maintained secondary indexes. We ask what that choice determines. Across seven measurement campaigns against one build of each of two systems, we find that physical layout predicts two things reliably and a third unreliably. It predicts *which operations exist*: the decomposing interface we examined exposes no server-side aggregation, refuses exact counts above a documented threshold, and returns an estimate in error by roughly fourteen percent in steady state — all structural facts, independent of hardware and load. It predicts *when a search index is current*: searching immediately after a write, the comparator *missed* the document in 30/30 trials and the decomposing engine in 0/30 — a difference exactly tested at $p \approx 8.5 \times 10^{-18}$; the asymmetry vanishes entirely once the delay exceeds the comparator’s refresh interval. It does *not* reliably predict latency, and we establish this negatively: of 93 pairwise comparisons re-analysed by separation of support, 56 separate, 34 overlap and 3 cannot be decided at all, and among the overlapping are two of the three margins favouring the decomposing engine. We further show that the study’s headline ratios — quotients of fitted slopes — have no finite upper bound on one of the two passes collected, the denominator being indistinguishable from zero. We report a methodological consequence: on the index-currency axis, a comparison of *latencies* fails to separate while a comparison of *proportions* on the same trials separates completely, because the two latencies are not values of one quantity. The measurement envelope is narrow — one shared host, a single sequential closed-loop client, 200,000 to 1,000,000 documents, one datacentre — and is the envelope in which the decomposing engine is weakest. All raw records, probe sources, adversarial audits and integrity checks are published, and for each claim we pre-declare the measurement that would overturn it.

Keywords: document stores; secondary indexing; index currency; read-your-writes; LSM storage; measurement methodology; limits of latency measurement.

Conflict of interest. The author is employed by a company that resells both systems examined and works on one of them. The system he works on loses five of the eight axes reported. Every figure is published with the reserve that bounds it, the raw records are unedited, and the adversarial audits written against this work are published alongside it.

1 Introduction

A document database must decide where a record lives on disk. One family stores each document approximately as presented, in a binary encoding, and indexes only what the operator declares. Another decomposes the document at write time into generic typed columns, and maintains

secondary indexes over them without instruction — the wide-column lineage of Bigtable [1] and Cassandra [4], over an LSM store [7, 6]. The second arrangement is not exotic: it is how a document API layered over a wide-column engine reconciles a schemaless interface with a schema-bearing store.

The trade is usually described qualitatively. Decomposition makes every field queryable without declaration and makes the record searchable at acknowledgement; it charges index maintenance to every write. Whole-record storage charges nothing it was not asked to and keeps search indexing off the transaction path; a search issued immediately after a write may not find it.

This note asks what that choice *determines*, and separates three answers.

It determines capability.

Whether an operation exists at all — aggregation, exact counting, grouping off the partition key — is settled by the interface and the storage model, not by hardware. These results need no percentile and survive every objection about sample size.

It determines index currency.

Whether a search finds what was just written is a property of where index maintenance sits relative to the commit. We measure it as a *failure rate* against delay, which is exactly testable, rather than as a latency, which on these data is not.

It does not determine latency, on evidence we can offer.

We report this as a negative result with its mechanism: our own apparatus cannot establish direction on 34 of 93 comparisons, our headline slope ratios are unbounded on one of two passes, and the coefficient we published first collapses by a factor of five between cache regimes.

Contributions.

1. Five structural properties of a decomposing document API, measured or located in vendor documentation, three of them not stated in that documentation: a consensus round on every mutation; an 8,000-byte ceiling on indexed strings; nine automatic indexes per collection against a hundred-per-node guardrail; no server-side aggregation; and an estimator wrong by $\approx 14\%$ after both flush and major compaction (§3).
2. An exactly tested measurement of index currency as a miss-rate curve, and the observation that the same phenomenon does not separate as a latency comparison, with the reason (§4, §6).
3. **A result about measurement rather than about engines**, which we believe transfers furthest: on one phenomenon, measured in one set of trials, a comparison of *latencies* fails to separate while a comparison of *proportions* separates completely — because the two latencies are not values of one quantity, one being a transport floor and the other an indexing schedule. The overlap is therefore not noise to be beaten with a larger sample; the comparison was ill-posed (§6).
4. A distribution-free re-analysis of 93 comparisons by separation of support, applicable to any study whose per-observation series were discarded, together with the finding that this apparatus cannot reach the study’s own headline quantities (§5).
5. A published artefact containing the raw records, the probe sources, nine automated integrity checks, and the adversarial audits that reversed several of our own conclusions (§10).

What this note is not. It is not a benchmark. Load was driven closed-loop by a single client throughout; no concurrency was measured; the systems ran on one shared host under uncontrolled background load. A reader seeking throughput or tail behaviour under contention will find nothing usable here, and §8 says so in the terms a reviewer would use.

2 Setting and method

Systems. The decomposing side is **IBM DataStax Hyper-Converged Database 2.0.6** (release 5.0.7.0-ea50e91ba01f), a Cassandra-derived wide-column engine, addressed through its **Data API v1.0.33**. The whole-record side is **MongoDB 8.0.32**, a three-member replica set. For the index-currency axis only, MongoDB ran as `mongodb-atlas-local 8.3.11` carrying `mongot 1.75.1` in the `localDev` edition, which its vendor designates for evaluation rather than production — a substitution we flag wherever a result depends on it.

We name the products because the capability findings of §3 are checkable only against named documentation, and because the artefact names them throughout. Elsewhere in this note we write *decomposing engine* and *comparator*, not from discretion but because the thesis concerns a *physical arrangement* rather than two brands: a reader operating some other decomposing document interface should be able to ask which of these results transfer.

Corpus and workload. The mutation series uses synthetic documents of a single shape: an identifier, one short mutable status field, and sixteen ballast strings of equal length, the length varying across the series at 512, 1,024, 2,048, 4,096 and 8,000 bytes — so documents of roughly 8, 16, 32, 64 and 128 KB, with field *count* held constant and indexed *volume* varying. The mutation under test is always the same: one `$set` on the status field, which touches none of the ballast. The 8,000-byte ceiling is not a design choice but the largest indexed string the decomposing interface accepts, which is why the series stops there and why wider documents are reached by adding bytes per field rather than fields.

A second corpus, used for the capability and aggregation axes, holds 200,000 documents carrying a category drawn from ten values and a deterministic numeric amount, so that every aggregate has a ground truth computed independently in the probe and every arm is verified exact against it before its timing is reported. Holding field count fixed while varying bytes is what lets §5 attribute the mutation cost to indexed volume rather than to field count — a separate series, varying the count at constant volume, returned *inconclusive* against its pre-registered threshold and is reported as such in the artefact.

Host and regime. One shared virtual machine, 80 vCPU, 220 GiB RAM, at load average 14–16 throughout; storage class not establishable. Six of seven campaigns ran cache-resident. Two campaigns reached disk: one placed the dataset beyond memory, and one re-measured the aggregation axis after an explicit flush and a major compaction.

Durability mapping. Majority write concern with journalling on the comparator against quorum-level writes with a periodic commit-log sync on the decomposing engine. This mapping *favours* the decomposing engine, which acknowledges before its sync while the comparator waits for its journal. We adopted it deliberately: the decomposing engine lost the mutation axis anyway, and a reader may discount the margin accordingly.

Statistics. Percentiles only; no means for latency. Thirty observations per point, two passes at most. Of the thirty-nine raw records the probes wrote, twenty-five carry latency distributions, and **twenty-three of those twenty-five discarded their per-observation series at write time**, keeping only summaries. No confidence interval is recoverable from them by anyone, including the author. The two records that retain their observations belong to the final campaign, and they publish bootstrap intervals over the retained series.

What survives universally is one distribution-free question: are the two arms’ observed ranges disjoint? Where they are, every observation of one arm beat every observation of the other, and the direction follows without any distributional assumption; the exact one-sided permutation

probability of that outcome is $1/\binom{n_A+n_B}{n_A}$. We apply it to all 93 comparisons and report the answer for every axis.

3 Layout determines capability

Five properties of the decomposing interface bear on design and are independent of hardware, load and cache regime.

1. **A consensus round on every mutation.** Tracing shows each single-field update compiled into a read followed by a conditional rewrite of the whole document and its derived columns, the conditional executing at serial consistency. This is not optional and not configurable through the interface. *Reserve:* every probe in this work emits conditional updates, including the direct arm intended to remove the interface, so the cost of consensus is nowhere isolated.
2. **An 8,000-byte ceiling on any indexed string.** Exceeding it is refused at write time, which forced chunking in our own document generator and makes selective indexing compulsory for long text.
3. **Nine automatic indexes per collection, against a hundred-per-node guardrail.** About eleven collections per node before creation is refused — a capacity limit imposed by an indexing convenience rather than by data volume.
4. **No server-side aggregation.** The command allow-list on this build holds nineteen commands; `aggregate`, `$group` and `distinct` answer `COMMAND_UNKNOWN`. Summing a field by category therefore has exactly one route through the interface: transfer the corpus to the client. *Reserve:* an allow-list is a product decision and can change between builds; what resists is the mechanism, not the list.
5. **Exact counting refused, and the estimator wrong in steady state.** The vendor documents that exact counts beyond a threshold are unsupported and recommends the estimate. On this build the threshold is a thousand. The recommended estimate returned **0** for a collection holding 200,000 documents before the first flush; re-measured after a flush it returned 171,267, and after a major compaction 172,132 — errors of 14.4% and 13.9%, not converging. The comparator’s estimator returned 200,000 exactly on the same corpus.

A limit of expressibility, measured. The native query language offers grouping, but only on primary-key columns. Against a table whose primary key does not carry the group column, `GROUP BY` is refused outright (`InvalidRequest code=2200`), with or without a filtering hint. The escape from the missing aggregation pipeline therefore presupposes a table partitioned by the group key in advance. *Reserve, pre-registered and triggered:* the per-partition sweep, which is the faster of the two native routes, does execute against an unpartitioned table once a filtering hint is added. What is categorically inexpressible without pre-partitioning is the grouping form alone.

Is this a fair axis? The engine’s own modelling doctrine instructs the reader not to aggregate at query time but to store pre-computed answers, roughly a table per query. The architecturally correct response to “sum this field by category” is thus *neither* route we measured. What keeps the measurement meaningful is that the subject is the *interface*, whose proposition is document ergonomics in the manner of the comparator; a team adopting it on that basis will expect `aggregate` and will meet its absence at a `COMMAND_UNKNOWN`. The comparison is fair at the API surface and unfair at the storage engine, and both halves must travel together.

Magnitude, with its condition. Where the operation exists on both sides, the cost of the missing pipeline is large and *depends on the query*. Against a client-side scan of 200,000 documents (median 132,985 ms, $n = 15$), the comparator’s server-side grouping took 227.5 ms at ten groups, 878.2 ms at a hundred thousand groups, and 218.4 ms filtered-then-grouped — ratios

of $584\times$, $151\times$ and $609\times$ respectively, on disjoint bootstrap intervals. The comparator’s cost follows group cardinality; the interface’s does not, being dominated by transport. **The ratio falls by a factor of 3.9 across that range**, so no single multiplier should be quoted.

4 Layout determines index currency

Write a document, then search for it after a delay τ . Does the search find it?

Table 1: Miss rate at nine delays, thirty trials each, both systems on one host. A miss is a search that does not return a document already acknowledged as written. Figure 1 plots these same counts.

τ (ms)	0	100	250	500	750	1000	1500	2000	3000
Decomposing engine	0/30	0/30	0/30	0/30	0/30	0/30	0/30	0/30	0/30
Comparator	30/30	28/30	25/30	15/30	10/30	0/30	0/30	0/30	0/30

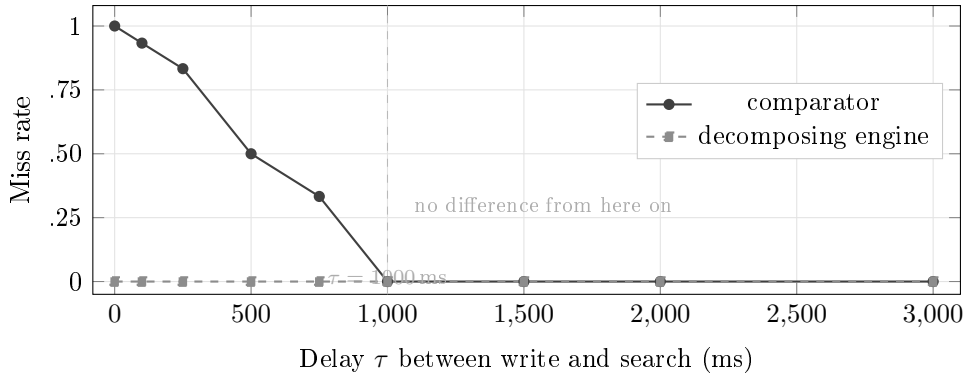


Figure 1: The data of Table 1, thirty trials per point. The transition tracks the comparator’s refresh interval — measured at mean 646.3 ms over sixty trials (min 89.1, max 1170.2) — and not its identity: a deployment with a different interval moves the curve. The curve’s existence is the structural fact; its position is a setting. At $\tau = 0$ the separation is complete and exactly tested; from $\tau = 1000$ ms the two arms are indistinguishable.

At $\tau = 0$ the separation is total: Fisher’s exact test gives a one-sided $p = 8.456 \times 10^{-18}$, which is exactly $1/\binom{60}{30}$ — the probability floor set by the design rather than by the effect, the effect being complete. From $\tau = 1000$ ms onward there is no difference at all.

The transition tracks the comparator’s *refresh interval*, not its identity. Measured without phase-locking onto the refresh cycle, that interval had mean 646.3 ms over sixty trials (min 89.1, median 664.3, max 1170.2). A deployment with a different interval would move the curve; the curve’s existence is the structural fact, its position is a setting.

The decision rule this yields. Two numbers decide this axis, and only one concerns a database: the refresh interval of the deployment, and the delay the application leaves between writing and searching. Where the second is shorter than the first, the decomposing engine returns the document and the comparator does not. Where it is longer, the advantage is worth nothing.

Reserves. The comparator’s search process ran in an evaluation edition in a single-node container; a production topology places search on dedicated nodes and may refresh differently, in either direction. The two search paths are not the same object — one lexical, one vector — and we compare *currency*, not retrieval quality. The decomposing engine’s “synchronous” is bounded

below by an HTTP floor of ≈ 45 ms, so we can establish that its window is smaller than one measurement floor, not that it is zero.

5 Layout does not reliably determine latency

We state this negatively, with three pieces of evidence, two of them against our own headline numbers.

(a) **A third of the comparisons do not separate, and three cannot be judged.** Of 93 pairwise comparisons re-analysed by separation of support, 56 are disjoint, **34 overlap**, and **3 are undecidable**: their records kept a median and nothing else — no count, no minimum, no maximum — so neither separation nor any interval can be computed from them. Two of those three are the disk-regime comparisons, which is to say that the regime evidence on which §5(c) rests is the evidence least able to defend itself. We report the coefficient collapse as a fact about two medians and nothing more. Among the overlapping are two of the three margins that favour the decomposing engine. In particular, on filtering by a field nobody declared — the axis automatic indexing exists to serve — the comparator’s fastest of fifty observations (13.3 ms) beats the decomposing engine’s median (17.4 ms), and the ratio interval runs $[0.46, 65.8]$, containing one. What these data establish there is *predictability* (≈ 17 ms whatever the document, against 13–863 ms) and not speed.

(b) **The headline ratios are unbounded on the pass that was not used.** The most quotable numbers in this work are quotients of fitted slopes. The distribution-free apparatus above compares samples and fits nothing; it therefore reaches none of them. Fitting both passes and propagating standard errors:

Table 2: Denominator slopes (ms per indexed KiB) and the ratio to the decomposing engine, by pass. The harness fitted pass one only; nothing in earlier revisions of this work said so.

	Pass one	Pass two
Comparator, wildcard index	0.0176 ± 0.0038	0.0063 ± 0.0026
Comparator, nothing declared	0.0098 ± 0.0030	0.0085 ± 0.0058
Ratio, wildcard arm	44×	116×
Fieller interval on that ratio	$[26, 142]$	unbounded

On pass two the denominator’s interval reaches zero, so by Fieller’s theorem [3] the ratio has no finite upper bound; the point estimate moves by a factor of 2.6 between two passes of one probe on one machine. **No value of this ratio is publishable.** What is defensible is a range of latencies: roughly threefold at 8 KB widening to thirteenfold at 128 KB, on supports disjoint in 19 of 20 size-and-pass cells.

(c) **The regime moves the coefficient by a factor of five.** The per-byte mutation coefficient we first published is $\times 7.50$ with the dataset memtable-resident, $\times 5.94$ with it on disk, and $\times 1.52$ once a flush before each update forces the read half of the read-modify-write cycle onto the storage layer. **A single “cost per KiB” for an LSM-backed document store is therefore not a well-formed number.** The mechanism transfers; the rate does not.

6 One phenomenon, two forms of the question, two verdicts

Section 4 reports index currency as a proportion. As a comparison of *latencies* on the same trials, the two arms’ observed ranges overlap — the decomposing engine’s maximum (573.6 ms)

exceeds the comparator’s minimum (89.1 ms) — and the ratio interval [0.16, 36.7] contains one. Same runs, same corpus, opposite verdicts.

The proportion binds, and the reason is not that users care more about failures than about waiting. It is that **the two latencies are not values of one quantity**. The ≈ 45 ms on one side is a measurement floor, the round trip carrying the question; the ≈ 646 ms on the other is a refresh interval, a property of an indexing schedule. Subtracting one from the other subtracts a transport from a timetable. The overlap that defeats the latency comparison is therefore not noise to be beaten with more observations: the comparison was ill-posed, and no sample size repairs it. The proportion asks one well-posed question of both — *at this instant, is the document there?* — and both answer in the same units.

We state the generalisation cautiously, since it rests on one instance: where a comparison refuses to separate, it may be worth asking whether the two arms measure the same quantity before concluding that the effect is small.

7 Summary of axes

Table 3: Eight axes on which the two systems were set against each other, with the inference status of each. “Certain” means the two arms’ observed ranges are disjoint. Rows come from four deployment configurations and are not commensurable with one another; the count is not a score.

Axis	Favours	Status and reserve
Mutating one field	comparator	Certain (disjoint in 19/20 cells). Memtable-regime; slope ratios unpublishable (§5)
Fetching by identifier	comparator	Certain. Much of the gap is the interface’s HTTP hop, not isolated on the read path
Filtering, declared index	comparator	Certain
Aggregating by group	comparator	Capability , not a race: no server-side pipeline. Ratio depends on group cardinality (584× to 151×)
Counting exactly	comparator	Structural : the operation is refused; the estimator is wrong by $\approx 14\%$ in steady state
Freshness, ordinary index	neither	Both current at first query, 40/40 each
Filtering, undeclared field	not established	Supports overlap, interval [0.46, 65.8]. What is established is predictability
Freshness, search index	decomposing engine	Certain <i>as a proportion</i> ($p \approx 8.5 \times 10^{-18}$); not established as a latency . Total inside the refresh window, void outside

8 Threats to validity

Construct. “Cost” is latency throughout, never bytes written. A layout property estimated through a latency proxy inherits the cache state of the run, which is why the flagship coefficient spans a factor of five across three regimes. The capability results (§3) are untouched by this, being non-latency measurements.

Statistical conclusion. Per-observation series were discarded by 23 of the 25 latency-bearing records; the remaining two are the final campaign’s. No interval, no test and no re-percentiling is possible for the other twenty-three, for any reader, permanently. What the surviving minima and maxima decide is overlap, and 34 of 93 comparisons overlap.

Internal. Instruments were written by the measurer. The comparisons that fail separation of support and the measurements carrying no pre-registered decision rule are largely the same rows, and they are disproportionately the rows favourable to the author’s employer’s product. We report the overlap rather than the medians for those rows.

External. One host, one build of each system, one datacentre, 200,000 to 1,000,000 documents, a single sequential closed-loop client. **This envelope is the one in which the decomposing engine is weakest and the comparator strongest:** nothing that makes the architectural case for a distributed engine — partitioning at scale, sustained concurrent writes, multi-site replication — was exercised once. Three regimes could change the picture and none was measured: beyond one node’s memory; beyond the write load one deployment absorbs; and across datacentres, where two effects (a costlier consensus round, and a single-replica vector read) would both tell *against* the decomposing engine.

Closed loop. Load was driven closed-loop throughout, which is the first pitfall the benchmarking literature names [9, 8]: the sampling rate is a decreasing function of latency, so slow periods contribute proportionally fewer observations. Published tail percentiles are tails of a service-time distribution at negligible utilisation, not of a response-time distribution under load, and carry none of the meaning tail latency has in a served system [2].

Editions. The comparator’s search process was measured in an evaluation edition. Two documentation pages cited for the decomposing engine belong to an earlier documentation line than the build measured; both citations are flagged in the artefact.

9 What would overturn each claim

A study that declares its limits should also declare what would settle them. Each row below names the measurement that would refute the corresponding claim, so that a reader who disagrees knows what to run rather than what to argue. None of these was performed here.

The last row is the important one. **This note does not claim that physical layout is irrelevant to latency;** it claims that a study of this shape cannot establish the relation, and it shows the arithmetic of why (§5). A better-instrumented study could establish what this one could not, and the artefact exists so that it can be attempted against the same probes.

10 The artefact

The repository accompanying this note contains: 39 raw measurement records, unedited, including the records of runs whose conclusions were later withdrawn; 19 probe sources; the derived inference file containing all 93 comparisons with their supports and intervals; nine automated integrity checks run in continuous integration (hashes, JSON validity, probe syntax, link resolution, figure regeneration byte-for-byte, and cross-document agreement); and the adversarial audits, which are written against the work and indexed so that a hostile reader can start there.

Entry point. The cheapest verification requires no database at all: the derived inference file states, for all 93 comparisons, the two arms’ observed ranges and whether they are disjoint, and a reader can recompute every verdict in this note from it and from the raw records against which it is checked by continuous integration:

```
git clone -branch v1.0-arxiv <repository> && cd shredding-cost-hcd-mongodb
python3 .github/scripts/check_evidence_manifest.py # every raw file matches its
```

Table 4: Pre-declared refutation conditions. Rows are ordered by how cheap the refuting measurement is to perform.

Claim	What would overturn it
No server-side aggregation (§3)	A build of the same interface answering <code>aggregate</code> or <code>\$group</code> without <code>COMMAND_UNKNOWN</code> . An allow-list is a product decision; one release closes this.
Exact counting refused above a threshold	A configuration parameter raising or removing the threshold. We searched for one and found none; finding one refutes the claim as stated, not the behaviour we observed.
The estimator is wrong in steady state	The same estimate converging on a larger corpus, or after more compaction passes than the one we ran. Our two post-flush readings are a single trajectory, not a limit.
Index currency is total inside the window	A production search topology — dedicated nodes rather than a co-located evaluation edition — showing a miss at $\tau = 0$ on the decomposing side, or no miss on the comparator’s.
The mutation gap widens with indexed volume	A disk-bound series at the same sizes. Our disk campaign moved the coefficient by a factor of five and did not repeat the full series; the direction is certain, the shape is not.
Layout does not determine latency	Any of the above measured open-loop, on separate hosts, with per-observation series retained. That is the measurement this study should have been, and its absence is why this claim is stated negatively rather than positively.

```
hash
python3 .github/scripts/check_inference.py # every derived verdict re-derives
```

Reproducing the *measurements* is a longer undertaking and needs both engines; `REPRODUCING.md` carries the compose file and the prerequisites, and states plainly which parts of the original environment were not recorded and therefore cannot be reconstructed — the host port mapping among them. Absolute latencies will not reproduce; the three refusals of §3 and the directions marked certain in Table 3 should.

Fifty-two numbered points record where measurement contradicted the text it was written to support. They are kept as a list rather than a summary, because a summary would be a softening. Several conclusions in earlier versions of this work were reversed by later campaigns, including two reversals *against* the author’s initial reading; those reversals are in the text, not in errata.

11 Related work and position

That secondary-index maintenance costs writes, and that a read-modify-write cycle costs more than a blind write, are long established: the LSM literature analyses the write-amplification of index maintenance directly [7, 6], and the cost of distributed consensus on a conditional write is the subject of [5]. Neither is claimed here.

The methodological hazards we run into are equally well catalogued. Closed-loop generators are known to misrepresent load [9], and the common pitfalls of cross-system database measurement — single hosts, unequal tuning, unreported regimes — are enumerated in [8]. We do not claim to have avoided them; we claim to have declared them and to have reported what survives, following the threat taxonomy standard in empirical software research [10].

The gap this note occupies. Comparative measurement of these two engines is a populated field, but every study we located compares Cassandra *through CQL* to MongoDB through its own driver: two query languages, two data models, two client stacks. We searched for published

measurement of a *document API layered over a wide-column engine* — the arrangement examined here, in which the document model is a translation performed above the store rather than the store’s own model — and found none, in the database venues or elsewhere. We state this as a search result and not as a claim of priority: the absence may be ours. What follows from it is a caution about transfer, which we make explicit in §8: results obtained through this interface are properties of the *translation* as much as of the engine beneath it, and our own direct-CQL arm — which removed the interface and left the consensus round standing — shows how hard those two are to separate.

What this note adds is narrower, and in three parts: a measured account of *capability* differences that a practitioner otherwise discovers in production; an exactly tested account of index currency as a failure rate rather than a latency; and a worked demonstration that a study of this shape cannot establish latency claims, with the arithmetic of why. The third is offered so that comparisons of this kind can be read — and written — with the right expectations.

References

- [1] Fay Chang, Jeffrey Dean, Sanjay Ghemawat, Wilson C. Hsieh, Deborah A. Wallach, Mike Burrows, Tushar Chandra, Andrew Fikes, and Robert E. Gruber. Bigtable: A distributed storage system for structured data. *ACM Transactions on Computer Systems*, 26(2):1–26, 2008.
- [2] Jeffrey Dean and Luiz André Barroso. The tail at scale. *Communications of the ACM*, 56(2):74–80, 2013.
- [3] E. C. Fieller. Some problems in interval estimation. *Journal of the Royal Statistical Society, Series B*, 16(2):175–185, 1954.
- [4] Avinash Lakshman and Prashant Malik. Cassandra: A decentralized structured storage system. *ACM SIGOPS Operating Systems Review*, 44(2):35–40, 2010.
- [5] Leslie Lamport. The part-time parliament. *ACM Transactions on Computer Systems*, 16(2):133–169, 1998.
- [6] Chen Luo and Michael J. Carey. LSM-based storage techniques: A survey. In *The VLDB Journal*, volume 29, pages 393–418, 2020.
- [7] Patrick O’Neil, Edward Cheng, Dieter Gawlick, and Elizabeth O’Neil. The log-structured merge-tree (LSM-tree). *Acta Informatica*, 33(4):351–385, 1996.
- [8] Mark Raasveldt, Pedro Holanda, Tim Gubner, and Hannes Mühleisen. Fair benchmarking considered difficult: Common pitfalls in database performance testing. *Proceedings of the Workshop on Testing Database Systems (DBTest)*, pages 1–6, 2018.
- [9] Bianca Schroeder, Adam Wierman, and Mor Harchol-Balter. Open versus closed: A cautionary tale. *Proceedings of the 3rd USENIX Symposium on Networked Systems Design and Implementation (NSDI)*, pages 239–252, 2006.
- [10] Claes Wohlin, Per Runeson, Martin Höst, Magnus C. Ohlsson, Björn Regnell, and Anders Wesslén. Experimentation in software engineering. 2012.

Data availability

All measurement records, probe sources, derived inference data and audit documents are available at <https://github.com/davidleconte/shredding-cost-hcd-mongodb>, under CC-BY-4.0

for the documents and data. **Every claim in this note refers to the state of that repository released as tag v1.0-arxiv**; the repository’s history has been rewritten during its development, so a bare link to the default branch is not a stable reference and should not be treated as one. That release is archived with a DOI, and `data/MANIFEST.sha256` carries one SHA-256 per raw record so that a reader can verify the files individually against what this note reports. Absolute latencies will not reproduce on different hardware; the directions marked certain in Table 3, and the three refusals in §3, should.

Acknowledgements

The adversarial audits that reversed several conclusions of this work were conducted with the assistance of large language models, as was the drafting of the accompanying long-form articles. Every measurement was executed by the probes published in the artefact; every reversal was checked against the raw records by the author.