

```
logan@vm:~/net2300/dbmigrate$ nohup ./start-engine.sh &
[2] 6513
```

Running it with nohup

MariaDB migrate Manager
Net23000 class project
Update read-pending.sh with your database connection details

Commands Execution Logs Export Logs

Create New Command Entry Import From Backup Export Database

Command *
Enter command...

Status *
Pending

✓ Create command Entry

Command Entries Refresh Clear All

4/19/2026, 1:42:42 PM	Pending	×
echo hello	PENDING	
4/19/2026, 1:42:24 PM	Done	×
date	DONE	

Putting in working commands

4/19/2026, 1:43:42 PM	Pending	×
catt /a/b/c		
PENDING		
4/19/2026, 1:43:22 PM	Error	×
givemeroot		
ERROR		

Put in two bad commands

 Commands

 Execution Logs

 Export Logs

Create New Execution Log

Command ID (optional)

Reference to command log ID

Command *

Enter command that was executed...

Output

Command output...

Exit Code

e.g., 0 for success, 1 for error

✓ Create Execution Log

Execution Logs

 Refresh

 Clear All


4/19/2026, 1:43:45 PM (Command ID: 16)



Command: catt /a/b/c

Output:

bash: line 1: catt: command not found

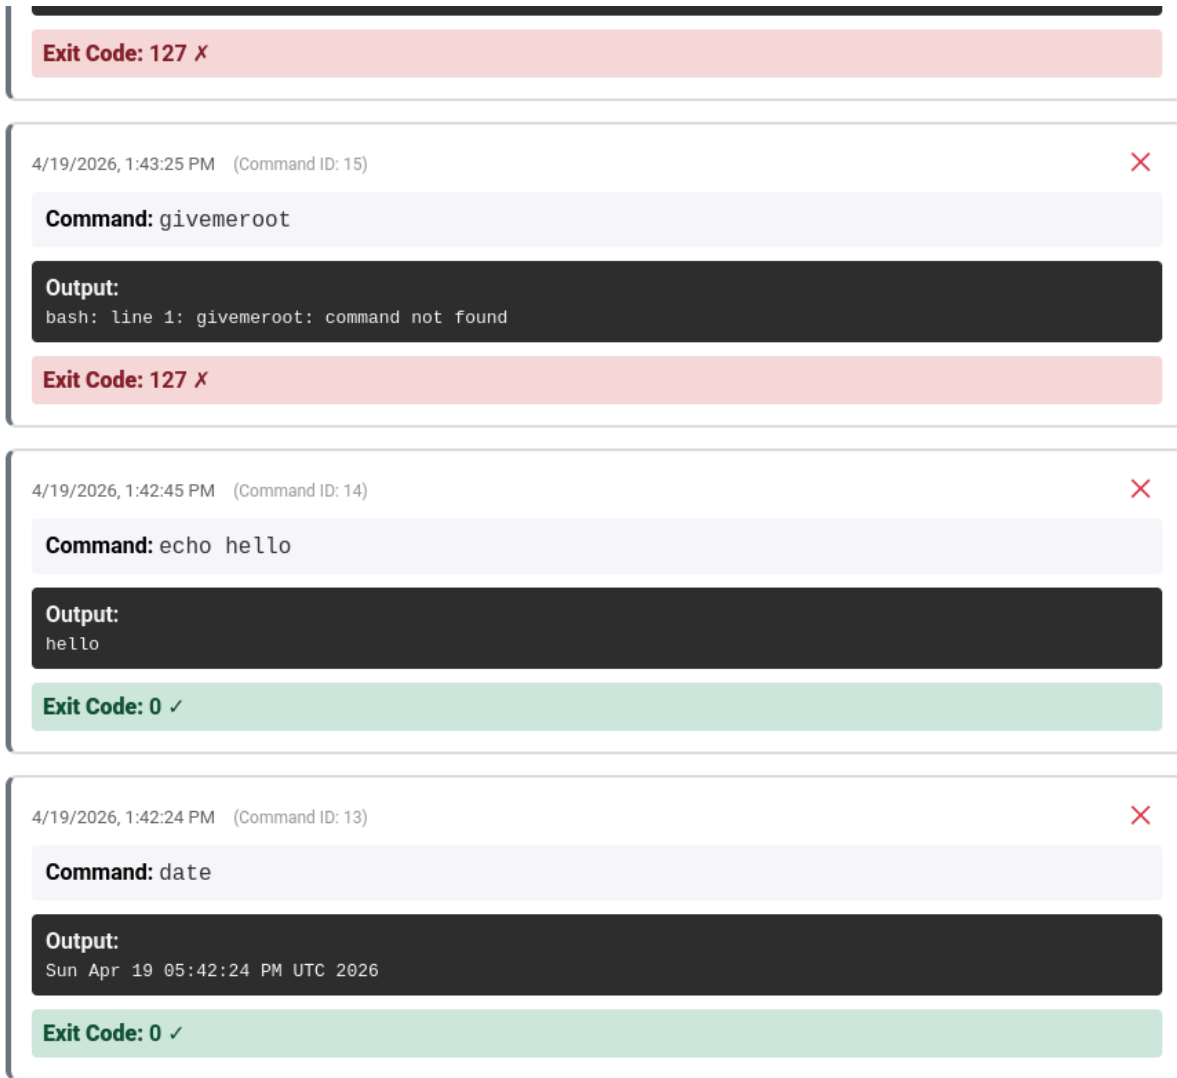

Two images of execution log results

The github now has [dblogrotate.sh](#)

```
#!/bin/bash
SCRIPT_DIR="$(cd "$(dirname "$0")" && pwd)"
LOGFILE="$SCRIPT_DIR/dbmigrate.log"
TIMESTAMP=$(date +"%Y%m%d_%H%M%S")
ARCHIVE="$SCRIPT_DIR/dbmigrate_${TIMESTAMP}.log.gz"

if [ -f "$LOGFILE" ]; then
  gzip -c "$LOGFILE" > "$ARCHIVE"
  > "$LOGFILE"
  echo "[$(date '+%Y-%m-%d %H:%M:%S')] Rotated to $ARCHIVE" >>
  "$LOGFILE"
fi
```

This just renames and zips the current log at midnight like asked.

The actual part that makes it run at midnight is a change in [start-engine.sh](#)

The part that makes this work is this

```
# Check if it's midnight and we haven't rotated yet today
CURRENT_HOUR=$(date +%H)
TODAY=$(date +%Y%m%d)
if [ "$CURRENT_HOUR" = "00" ] && [ "$LAST_ROTATE" != "$TODAY" ];
then
    bash "$SCRIPT_DIR/dblogrotate.sh"
    LAST_ROTATE="$TODAY"
fi
```

The script also has a sleep for 5 seconds at the end so its not constantly running. That time could be changed if needed

This portion as soon as it notices it is the start of the new day will call the dblogrotate.sh

Right here is the full [start-engine.sh](#)

```
#!/bin/bash
DB_USER="logapp"
DB_PASS="logapp123"
DB_NAME="logdb"
DB_HOST="127.0.0.1"
SCRIPT_DIR="$(cd "$(dirname "$0")" && pwd) "
LOGFILE="$SCRIPT_DIR/dbmigrate.log"
LAST_ROTATE=""

echo "[$(date '+%Y-%m-%d %H:%M:%S')] ===== start-engine started
(PID=$$) ====="

while true; do
    # Check if it's midnight and we haven't rotated yet today
    CURRENT_HOUR=$(date +%H)
    TODAY=$(date +%Y%m%d)
    if [ "$CURRENT_HOUR" = "00" ] && [ "$LAST_ROTATE" != "$TODAY" ];
    then
        bash "$SCRIPT_DIR/dblogrotate.sh"
        LAST_ROTATE="$TODAY"
    fi

    data=$(mysql -h $DB_HOST -u$DB_USER -p$DB_PASS $DB_NAME -Nse \
        "SELECT id, message FROM logs WHERE status='pending';"
    2>/dev/null)

    if [ -n "$data" ]; then
        while IFS=$'\t' read -r id cmd; do
```

```

[ -z "$id" ] && continue
echo "[$(date '+%Y-%m-%d %H:%M:%S')] Processing id=$id
cmd='$cmd'"
output=$(bash -c "$cmd" 2>&1)
result=$?
cmd_esc=$(echo "$cmd" | sed "s/'/'/'g")
output_esc=$(echo "$output" | sed "s/'/'/'g")
mysql -h $DB_HOST -u$DB_USER -p$DB_PASS $DB_NAME -e \
    "UPDATE logs SET status=IF($result=0,'done','error') WHERE
id=$id;" 2>/dev/null
mysql -h $DB_HOST -u$DB_USER -p$DB_PASS $DB_NAME -e \
    "INSERT INTO execution_log (log_id, command, output,
exit_code)
    VALUES ($id, '$cmd_esc', '$output_esc', $result);"
2>/dev/null
echo "[$(date '+%Y-%m-%d %H:%M:%S')] exit=$result id=$id
cmd='$cmd'" >> "$LOGFILE"
echo "    output: $output" >> "$LOGFILE"
done <<< "$data"
fi

sleep 5
done

```