


src/gmxlib/gmx\_lapack/dsytrd.c

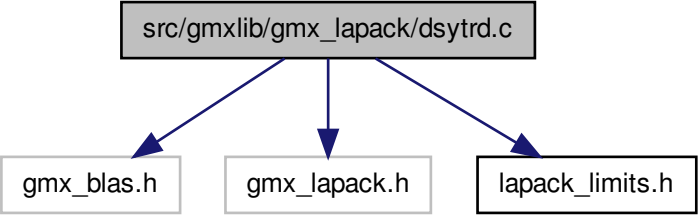

```
graph TD; A[src/gmxlib/gmx_lapack/dsytrd.c] --> B[gmx_blas.h]; A --> C[gmx_lapack.h]; A --> D[lapack_limits.h];
```

The diagram illustrates the dependencies of the source file `src/gmxlib/gmx_lapack/dsytrd.c`. It is represented by a grey rectangular box at the top. Three blue arrows originate from the bottom of this box and point to three separate white rectangular boxes below it. These boxes represent the header files that `dsytrd.c` depends on: `gmx_blas.h`, `gmx_lapack.h`, and `lapack_limits.h`.

gmx\_blas.h

gmx\_lapack.h

lapack\_limits.h