


src/gmxlib/gmx_lapack/slarft.c

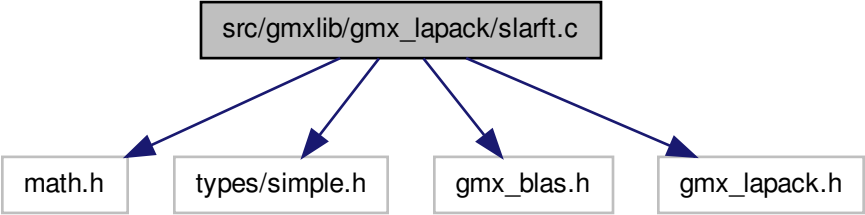

```
graph TD; A[src/gmxlib/gmx_lapack/slarft.c] --> B[math.h]; A --> C[types/simple.h]; A --> D[gmx_blas.h]; A --> E[gmx_lapack.h];
```

The diagram illustrates the dependencies of the source file `src/gmxlib/gmx_lapack/slarft.c`. It is represented as a central gray box at the top. Four dark blue arrows originate from the bottom of this box and point to four separate white boxes below it. These boxes represent the header files that `slarft.c` depends on: `math.h`, `types/simple.h`, `gmx_blas.h`, and `gmx_lapack.h`.

math.h

types/simple.h

gmx_blas.h

gmx_lapack.h