


src/gmxlib/gmx\_lapack/dorg2r.c

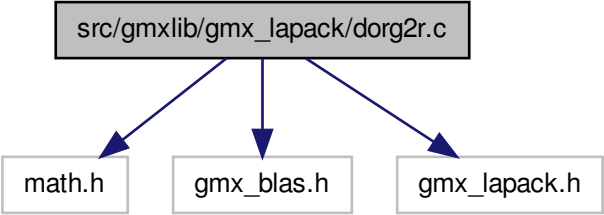

```
graph TD; A[src/gmxlib/gmx_lapack/dorg2r.c] --> B[math.h]; A --> C[gmx_blas.h]; A --> D[gmx_lapack.h];
```

The diagram illustrates the dependencies of the source file `src/gmxlib/gmx_lapack/dorg2r.c`. It is represented as a box at the top with three arrows pointing downwards to three separate boxes below it. The boxes below are labeled `math.h`, `gmx_blas.h`, and `gmx_lapack.h`, indicating that the source file depends on these header files.

math.h

gmx\_blas.h

gmx\_lapack.h