


src/gmxlib/gmx_lapack/slasq4.c

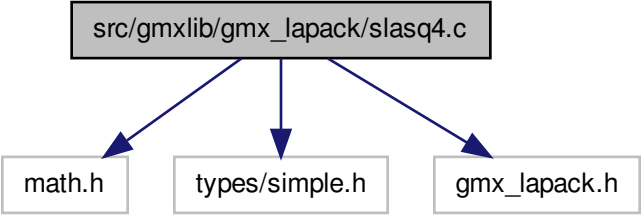

```
graph TD; A[src/gmxlib/gmx_lapack/slasq4.c] --> B[math.h]; A --> C[types/simple.h]; A --> D[gmx_lapack.h];
```

The diagram illustrates the dependencies of the source file `src/gmxlib/gmx_lapack/slasq4.c`. It is represented as a box at the top with three arrows pointing downwards to three separate boxes below it. The boxes below represent the header files that the source file depends on: `math.h`, `types/simple.h`, and `gmx_lapack.h`.

math.h

types/simple.h

gmx_lapack.h