


src/gmplib/selection/scanner_flex.h

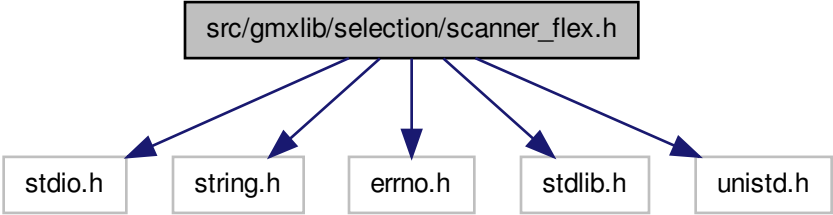

```
graph TD; A[src/gmplib/selection/scanner_flex.h] --> B[stdio.h]; A --> C[string.h]; A --> D[errno.h]; A --> E[stdlib.h]; A --> F[unistd.h];
```

The diagram illustrates the dependencies of the header file `src/gmplib/selection/scanner_flex.h`. It is represented as a central box at the top with five arrows pointing downwards to five separate boxes below it. Each box contains the name of a standard C header file: `stdio.h`, `string.h`, `errno.h`, `stdlib.h`, and `unistd.h`. The arrows indicate that `scanner_flex.h` includes or depends on each of these headers.

stdio.h

string.h

errno.h

stdlib.h

unistd.h