


src/gmxlib/gmx\_blas/strsm.c

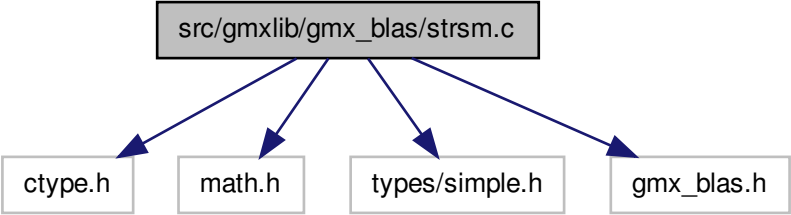

```
graph TD; A[src/gmxlib/gmx_blas/strsm.c] --> B[ctype.h]; A --> C[math.h]; A --> D[types/simple.h]; A --> E[gmx_blas.h];
```

The diagram illustrates the dependencies of the source file `src/gmxlib/gmx_blas/strsm.c`. It is represented as a central grey box at the top. Four dark blue arrows point downwards from this box to four separate white boxes below it, each representing a header file. The header files are `ctype.h`, `math.h`, `types/simple.h`, and `gmx_blas.h`, arranged horizontally from left to right.

ctype.h

math.h

types/simple.h

gmx\_blas.h