


src/gmxlib/nonbonded/nb\_kernel.h

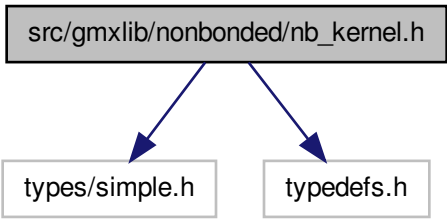

```
graph TD; A[src/gmxlib/nonbonded/nb_kernel.h] --> B[types/simple.h]; A --> C[typedefs.h];
```

The diagram illustrates the header file dependencies for `src/gmxlib/nonbonded/nb_kernel.h`. It is represented as a gray rectangular box at the top. Two blue arrows originate from the bottom edge of this box, pointing downwards to two separate white rectangular boxes. The left arrow points to a box containing the text `types/simple.h`, and the right arrow points to a box containing the text `typedefs.h`. This visualizes the `#include` statements at the beginning of `nb_kernel.h`.

types/simple.h

typedefs.h