


include/thread_mpi/event.h

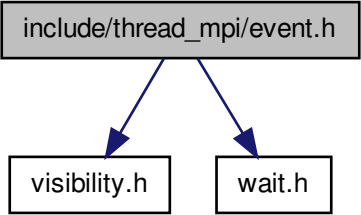

```
graph TD; A[include/thread_mpi/event.h] --> B[visibility.h]; A --> C[wait.h];
```

The diagram illustrates a header file inclusion relationship. At the top, a gray rectangular box contains the text 'include/thread_mpi/event.h'. Two blue arrows originate from the bottom edge of this box. The left arrow points to a white rectangular box labeled 'visibility.h', and the right arrow points to another white rectangular box labeled 'wait.h'. This visualizes that the 'event.h' header file includes both 'visibility.h' and 'wait.h'.

visibility.h

wait.h