


src/gmxlib/gmx\_lapack/sgetrf.c

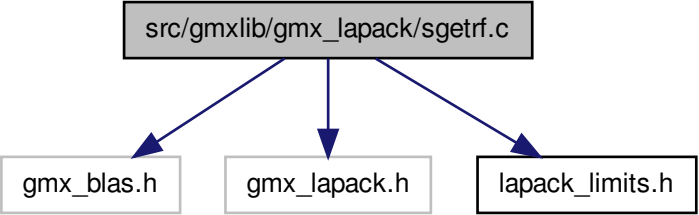

```
graph TD; A[src/gmxlib/gmx_lapack/sgetrf.c] --> B[gmx_blas.h]; A --> C[gmx_lapack.h]; A --> D[lapack_limits.h];
```

The diagram illustrates the dependencies of the source file `src/gmxlib/gmx_lapack/sgetrf.c`. It is represented as a box at the top with a grey background. Three blue arrows point downwards from this box to three separate boxes below it, each with a white background. The boxes are labeled `gmx_blas.h`, `gmx_lapack.h`, and `lapack_limits.h` from left to right.

gmx\_blas.h

gmx\_lapack.h

lapack\_limits.h