


src/gmxlib/gmx_lapack/dlarf.c

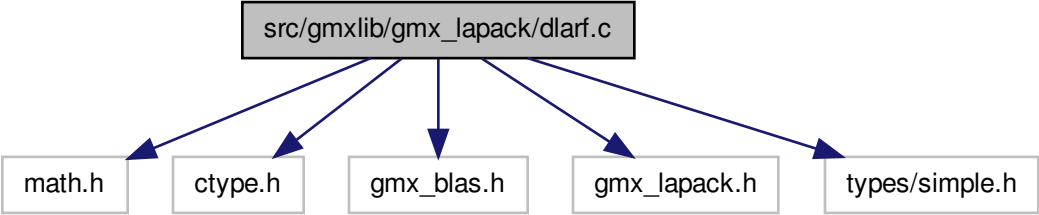

```
graph TD; A[src/gmxlib/gmx_lapack/dlarf.c] --> B[math.h]; A --> C[ctype.h]; A --> D[gmx_blas.h]; A --> E[gmx_lapack.h]; A --> F[types/simple.h];
```

The diagram illustrates the dependencies of the source file `src/gmxlib/gmx_lapack/dlarf.c`. It is represented as a central node at the top, with five arrows pointing downwards to its dependent header files: `math.h`, `ctype.h`, `gmx_blas.h`, `gmx_lapack.h`, and `types/simple.h`.

math.h

ctype.h

gmx_blas.h

gmx_lapack.h

types/simple.h