


TOPIC : Table

1. Construct a table as depicted in Figure 8.1 with the following codes.

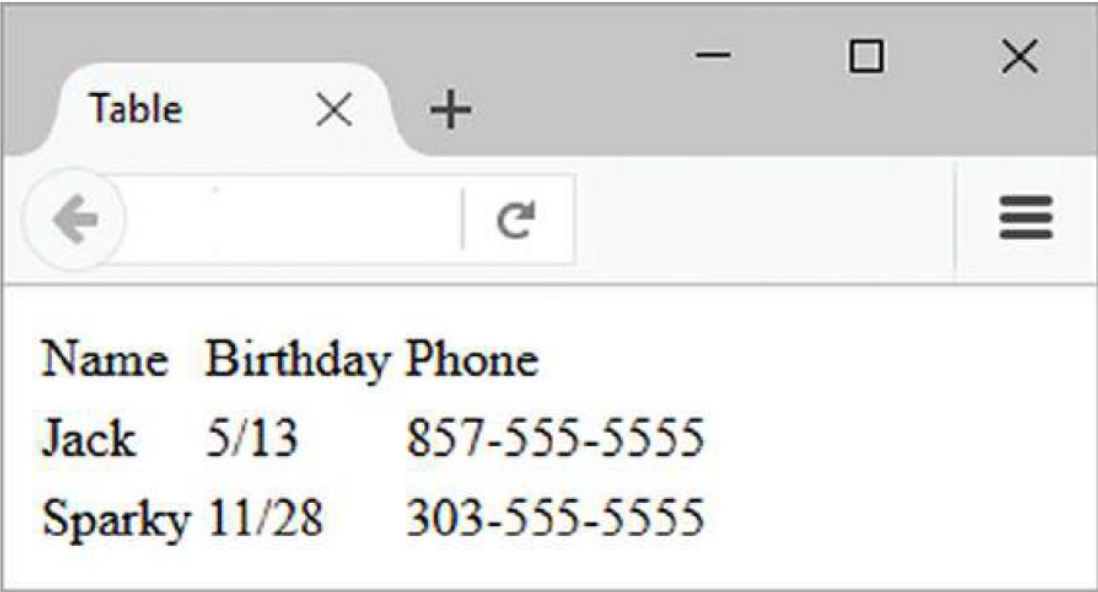


Name	Birthday	Phone
Jack	5/13	857-555-5555
Sparky	11/28	303-555-5555

Figure 8.1

```
<table>
<tr>
<td>Name</td>
<td>Birthday</td>
<td>Phone</td>
</tr>
<tr>
<td>Jack</td>
<td>5/13</td>
<td>857-555-5555</td>
</tr>
<tr>
<td>Sparky</td>
```

```
<td>11/28</td>  
<td>303-555-5555</td>  
</tr>  
</table>
```


2. Construct another table.

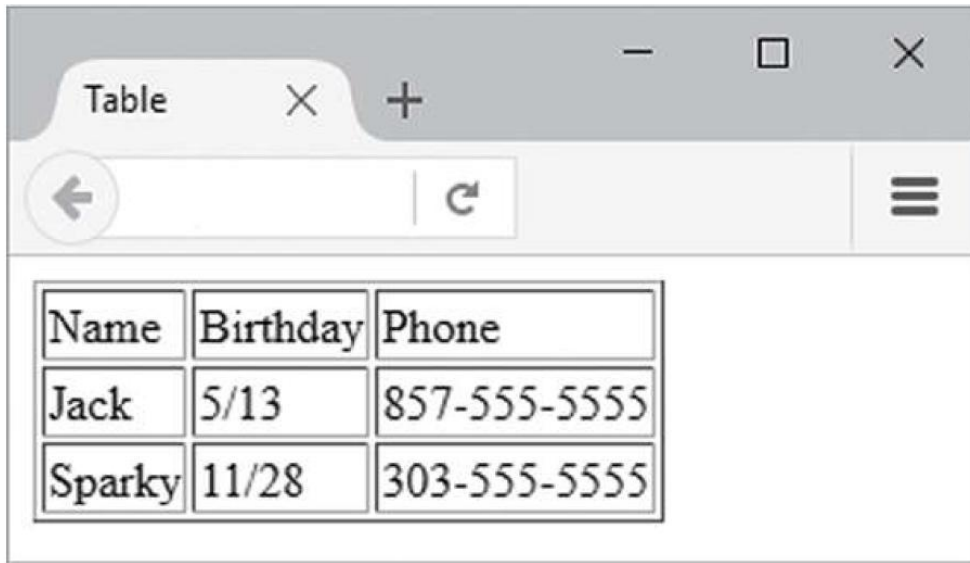


Name	Birthday	Phone
Jack	5/13	857-555-5555
Sparky	11/28	303-555-5555

Figure 8.2

Sample codes :

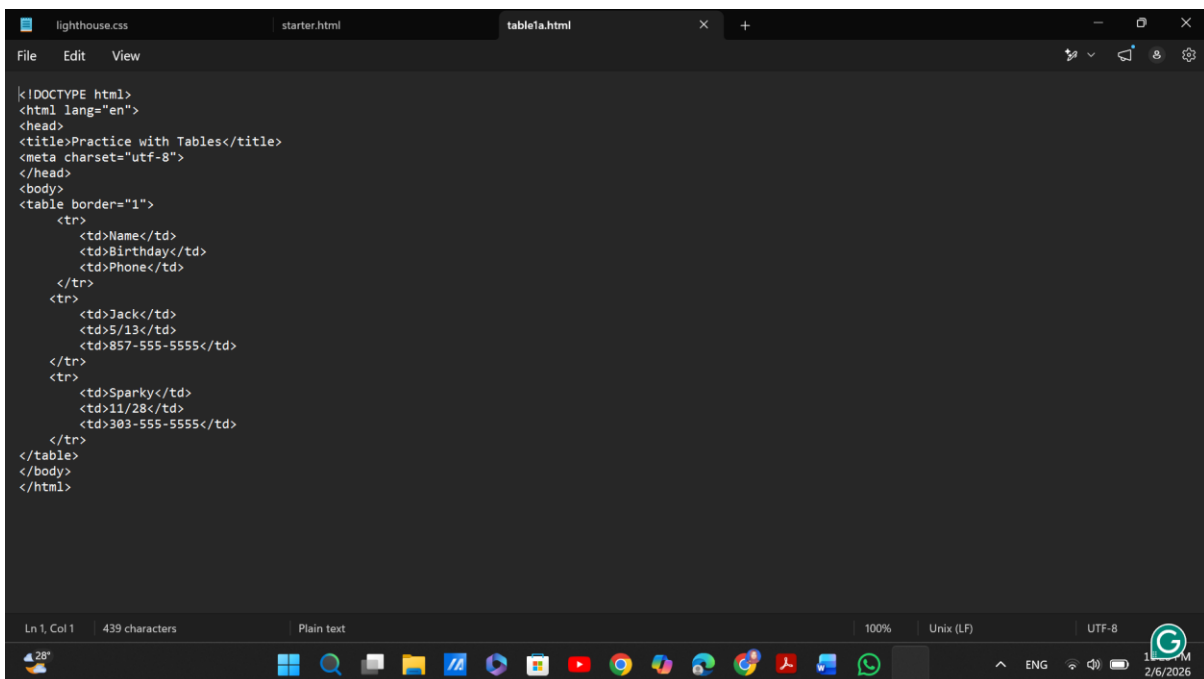

```
<!DOCTYPE html>  
<html lang="en">  
<head>  
<title>Practice with Tables</title>  
<meta charset="utf-8">  
</head>  
<body>  
<table border="1">  
<tr>  
<td>Name</td>  
<td>Birthday</td>  
<td>Phone</td>  
</tr>  
<tr>  
<td>Jack</td>  
<td>5/13</td>  
<td>857-555-5555</td>  
</tr>  
<tr>  
<td>Sparky</td>  
<td>11/28</td>  
<td>303-555-5555</td>  
</tr>  
</table>  
</body>  
</html>
```

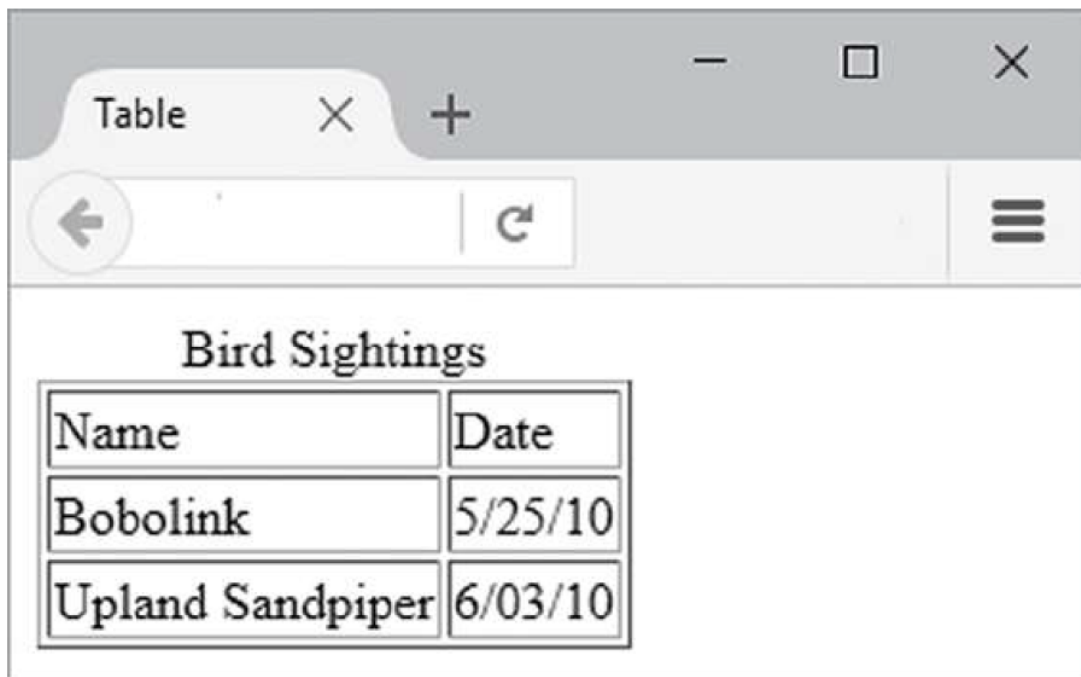

The screenshot shows a web browser window with a single tab titled 'Table'. The address bar is empty. The main content area displays a table with the caption 'Bird Sightings'. The table has two columns: 'Name' and 'Date'. The first row contains 'Bobolink' and '5/25/10'. The second row contains 'Upland Sandpiper' and '6/03/10'.


Name	Date
Bobolink	5/25/10
Upland Sandpiper	6/03/10

Figure 8.3

```
<table border="1">
<caption>Bird Sightings</caption>
<tr>
<td>Name</td>
<td>Date</td>
</tr>
<tr>
<td>Bobolink</td>
<td>5/25/10</td>
</tr>
<tr>
<td>Upland Sandpiper</td>
<td>6/03/10</td>
</tr>
</table>
```

Hands-On Practice 8.1.

Create a web page similar to Figure 8.1 that describes two schools you have attended. Use “School History” as the caption. The table has three rows and three columns. The first row will have table header elements with the headings School Attended, Years, and Degree Awarded. You will complete the second and third rows with your own information within table data elements.

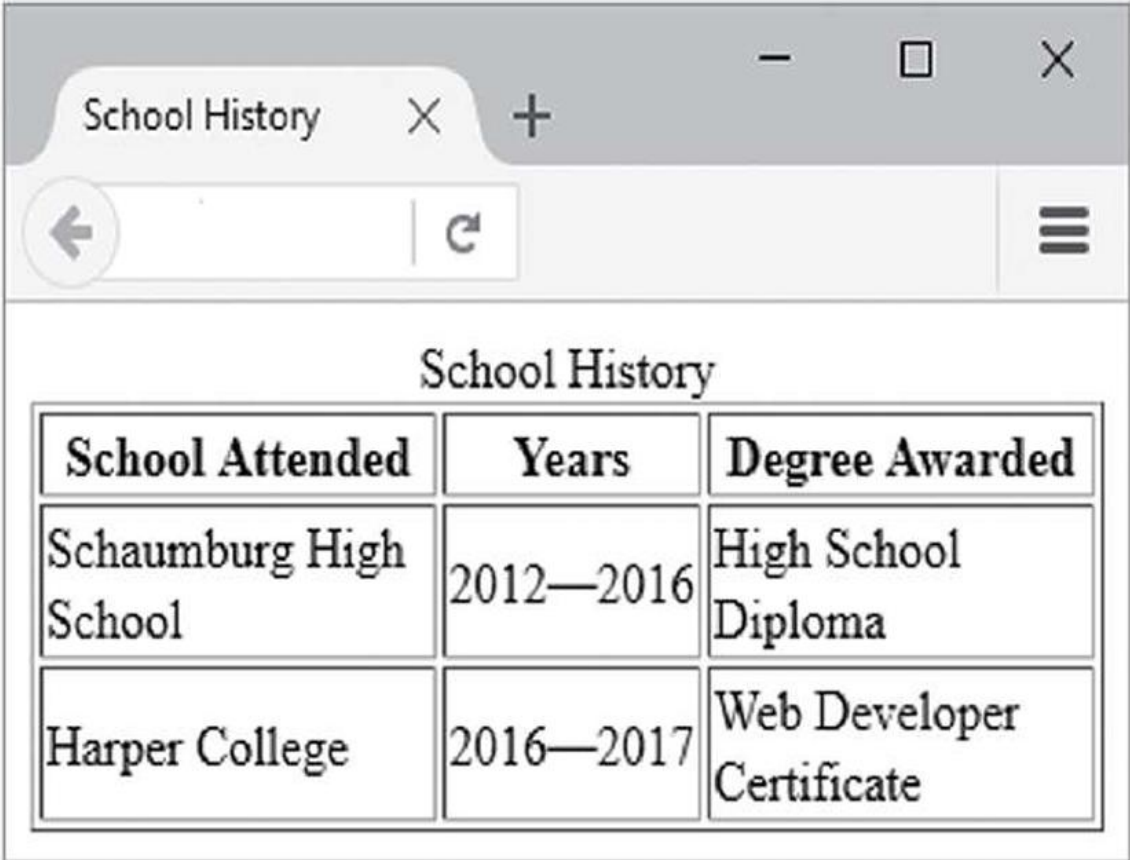

School Attended	Years	Degree Awarded
Schaumburg High School	2012—2016	High School Diploma
Harper College	2016—2017	Web Developer Certificate

Figure 8.4 School History Table.

To get started, launch a text editor. Use table, table row, table header, table data, and caption elements to configure a table similar to Figure 8.4.

Hints: The table has three rows and three columns. To configure a border, use `border="1"` on the tag. Use the table header element or the cells in the first row. Save your file and display it in a browser. It should look similar to Figure 8.4.

This spans two columns	
Column 1	Column 2

Figure 8.5

```
<table border="1">  
<tr>  
<td colspan="2">This spans two columns</td>  
</tr>  
<tr>  
<td>Column 1</td>  
<td>Column 2</td>  
</tr>  
</table>
```

This spans two rows	Row 1 Column 2
	Row 2 Column 2

Figure 8.6

```
<table border="1">  
<tr>  
<td rowspan="2">This spans two rows</td>  
<td>Row 1 Column 2</td>  
</tr>  
<tr>  
<td>Row 2 Column 2</td>  
</tr>  
</table>
```

Hands-On Practice 8.2.

You will create the web page shown in Figure 8.2 with the rowspan attribute.

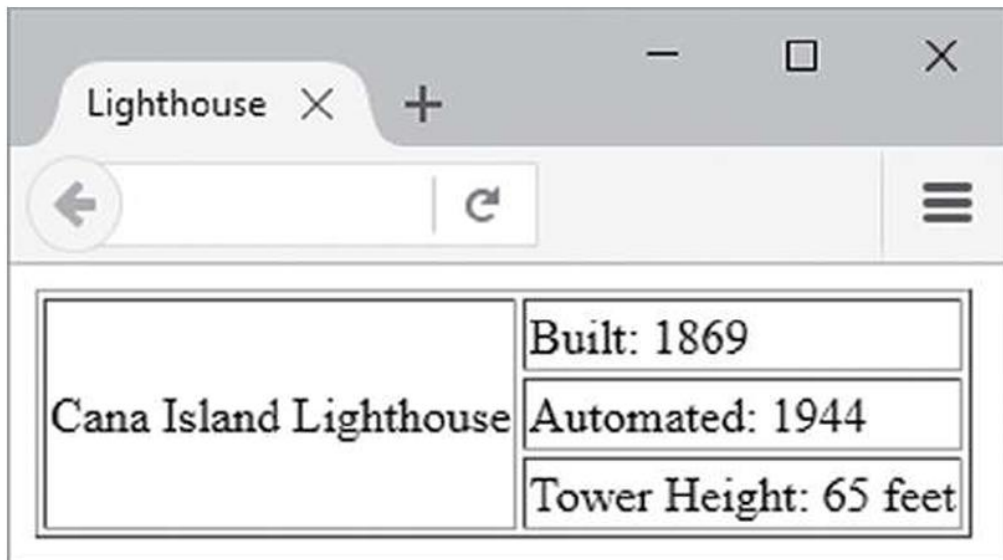


Figure 8.7


- 1. Code the opening `<table>` tag. Configure a border with `border="1"`.
 - 2. Begin the first row with a `<tr>` tag.
 - 3. The table data cell with “Cana Island Lighthouse” spans three rows. Code a table data element. Use the `rowspan="3"` attribute.
 - 4. Code a table data element that contains the text “Built: 1869”.
 - 5. End the first row with a `</tr>` tag.
 - 6. Begin the second row with a `<tr>` tag. This row will only have one table data element because the cell in the first column is already reserved for “Cana Island Lighthouse”.
-

- 7. Code a table data element that contains the text “Automated: 1944”.
- 8. End the second row with a `</tr>` tag.
- 9. Begin the third row with a `<tr>` tag. This row will only have one table data element because the cell in the first column is already reserved for “Cana Island Lighthouse”.
- 10. Code a table data element that contains the text “Tower Height: 65 feet”.
- 11. End the third row with a `</tr>` tag.
- 12. Code the closing `</table>` tag.

Save the file and view it in a browser. Notice how the “Cana Island Lighthouse” text is vertically aligned in the middle of the cell—this is the default vertical alignment. You can modify the vertical alignment using CSS— see the section “Style a Table with CSS” later in this chapter.

Hands-On Practice 8.3


1. In this Hands-On Practice, you will code CSS style rules to configure an informational table on a web page. Display the file in a browser. The page should look similar to Figure 8.8.

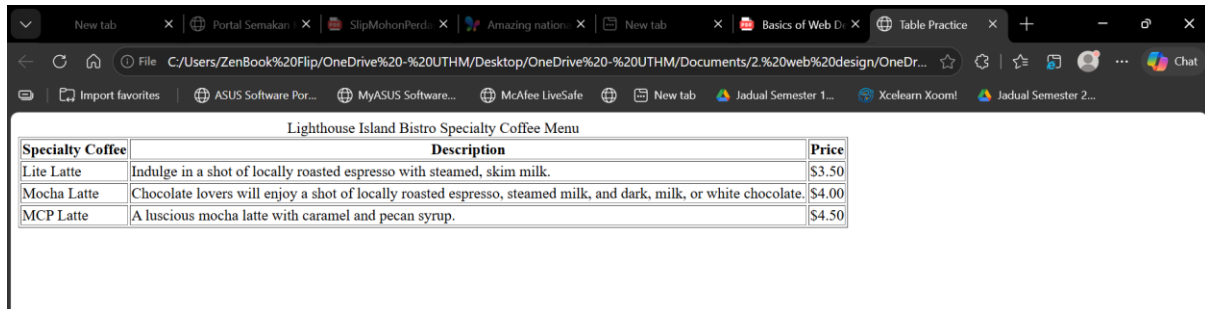

Specialty Coffee	Description	Price
Lite Latte	Indulge in a shot of locally roasted espresso with steamed, skim milk.	\$3.50
Mocha Latte	Chocolate lovers will enjoy a shot of locally roasted espresso, steamed milk, and dark, milk, or white chocolate.	\$4.00
MCP Latte	A luscious mocha latte with caramel and pecan syrup.	\$4.50

Figure 8.8 The table before CSS.

Sample codes :

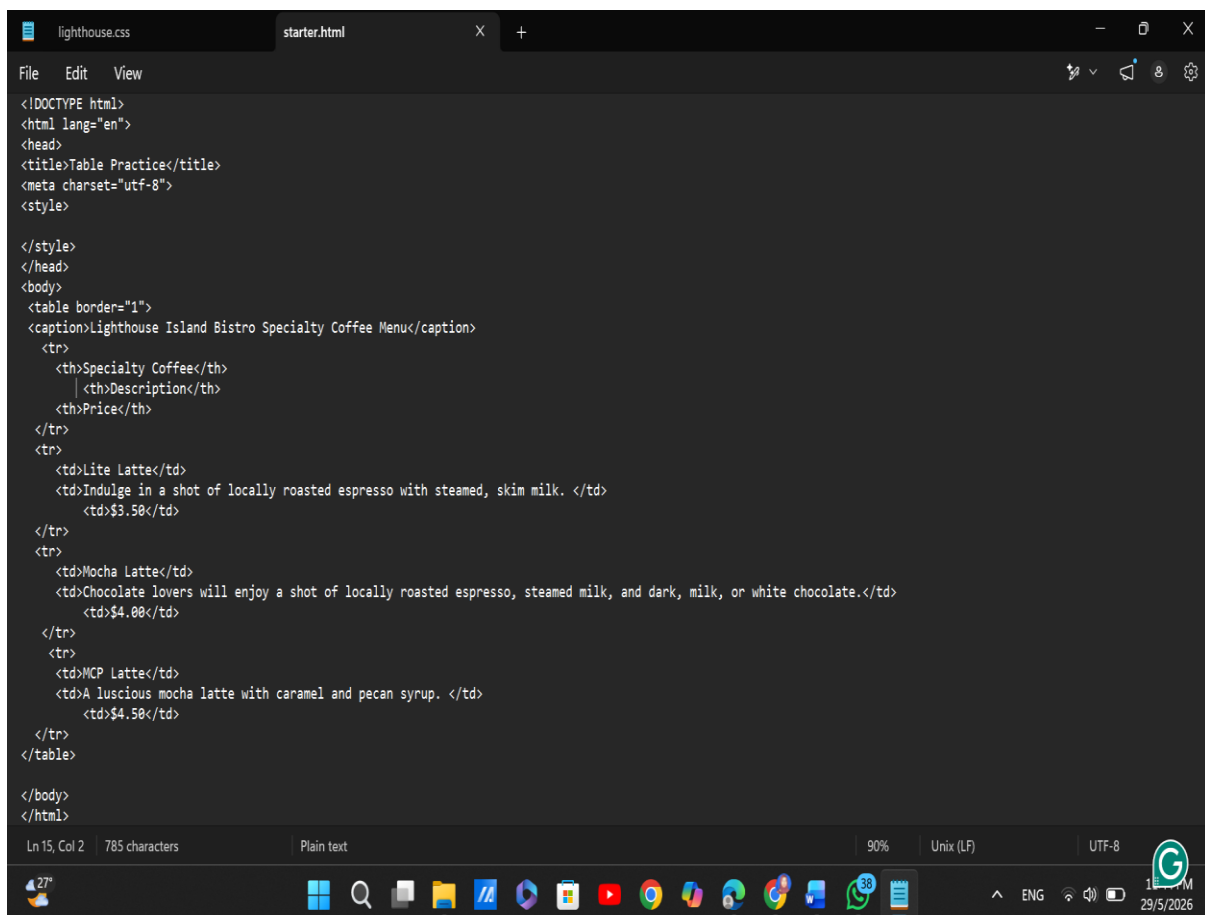

```

<!DOCTYPE html>
<html lang="en">
<head>
<title>Table Practice</title>
<meta charset="utf-8">
<style>

</style>
</head>
<body>
<table border="1">
<caption>Lighthouse Island Bistro Specialty Coffee Menu</caption>
<tr>
<th>Specialty Coffee</th>
<th>Description</th>
<th>Price</th>
</tr>
<tr>
<td>Lite Latte</td>
<td>Indulge in a shot of locally roasted espresso with steamed, skim milk. </td>
<td>$3.50</td>
</tr>
<tr>
<td>Mocha Latte</td>
<td>Chocolate lovers will enjoy a shot of locally roasted espresso, steamed milk, and dark, milk, or white chocolate.</td>
<td>$4.00</td>
</tr>
<tr>
<td>MCP Latte</td>
<td>A luscious mocha latte with caramel and pecan syrup. </td>
<td>$4.50</td>
</tr>
</table>
</body>
</html>
  
```

Launch a text editor. Locate the style tags in the head section. You will code embedded CSS in this Hands-On Practice. Position your cursor on the blank line between the style tags.

1. Configure the table element selector to be centered, have a dark blue, 5 pixel border, and have a width of 600px:

```
table { margin: auto; border: 5px solid #000066; width: 600px; }
```

Save the file as menu.html and display your page in a browser. Notice that there is a dark blue border surrounding the entire table.

2. Configure the td and th element selectors with a border, padding, and Arial or the default sans-serif font typeface:

```
td, th { border: 1px solid #000066; padding: 5px; font family: Arial, sans-serif; }
```

Save the file as menu.html and display your page in a browser. Each table cell should now be outlined with a dark blue border and should display text in a sans-serif font.

3. Eliminate the empty space between the borders of the table cells with the border-spacing property. Add a `border-spacing: 0;` declaration to the table element selector. Save the file and display your page in a browser.

4. Configure the caption to be displayed with Verdana or the default sans-serif font typeface, bold font weight, font size 1.2em, and 5 pixels of bottom padding:

```
caption { font-family: Verdana, sans-serif; font-weight: bold; font-size: 1.2em; padding-bottom: 5px; }
```

5. Let's experiment and configure background colors on the rows instead of cell borders. Modify the style rule on the td and th element selectors, remove the border declaration, and set border-style to none:

```
td, th { padding: 5px; font-family: Arial, sans-serif; border-style: none; }
```

6. Create a new class called altrow that sets a background color:

```
.altrow { background-color: #eaeaea; }
```

7. Modify the <tr> tags in the HTML: assign the second and fourth <tr> tags to the altrow class. Save the file. Display it in a browser. The table area should look similar to Figure 8.9. Notice how the background color of the alternate rows adds subtle interest to the web page.

Lighthouse Island Bistro Specialty Coffee Menu

Specialty Coffee	Description	Price
Lite Latte	Indulge in a shot of espresso with steamed, skim milk.	\$3.50
Mocha Latte	Choose dark or milk chocolate with steamed milk.	\$4.00
MCP Latte	A luscious mocha latte with caramel and pecan syrup.	\$4.50

Figure 8.9 Rows are configured with alternating background colors.

Sample codes :

```


lighthouse.css  starter.html  table1a.html  menu.html
File Edit View
<!DOCTYPE html>
<html lang="en">
<head>
<title>Table Practice</title>
<meta charset="utf-8">
<style>
table { margin: auto;
        border: 5px solid #000000;
        width: 600px;
        border-spacing: 0;
    }
    td, th { padding: 5px;
             font-family: Arial, sans-serif;
             border-style: none;
    }
    caption { font-family: Verdana, sans-serif;
              font-weight: bold;
              font-size: 1.2em;
              padding-bottom: 5px;
    }
    .altrow { background-color:#eaeaea; }
</style>
</head>
<body>
<table border="1">
<caption>Lighthouse Island Bistro Specialty Coffee Menu</caption>
<tr>
<th>Specialty Coffee</th>
<th>Description</th>
<th>Price</th>
</tr>
<tr class="altrow">
<td>Lite Latte</td>
<td>Indulge in a shot of locally roasted espresso with steamed, skim milk. </td>
<td>$3.50</td>
</tr>
<tr>
<td>Mocha Latte</td>
<td>Chocolate lovers will enjoy a shot of locally roasted espresso, steamed milk, and dark, milk, or white chocolate.</td>
<td>$4.00</td>
</tr>
<tr class="altrow">
<td>MCP Latte</td>
<td>A luscious mocha latte with caramel and pecan syrup. </td>
<td>$4.50</td>
</tr>
</table>
//html
Ln 23, Col 8 | 1,172 characters Plain text 70% Unix (LF) UTF-8

```

Hands-On Practice 8.4

In this Hands-On Practice, you will rework the table you configured in Hands-On Practice 8.3 to use CSS structural pseudo-classes to configure color.

1. Launch a text editor. Save the file as menu2.html.

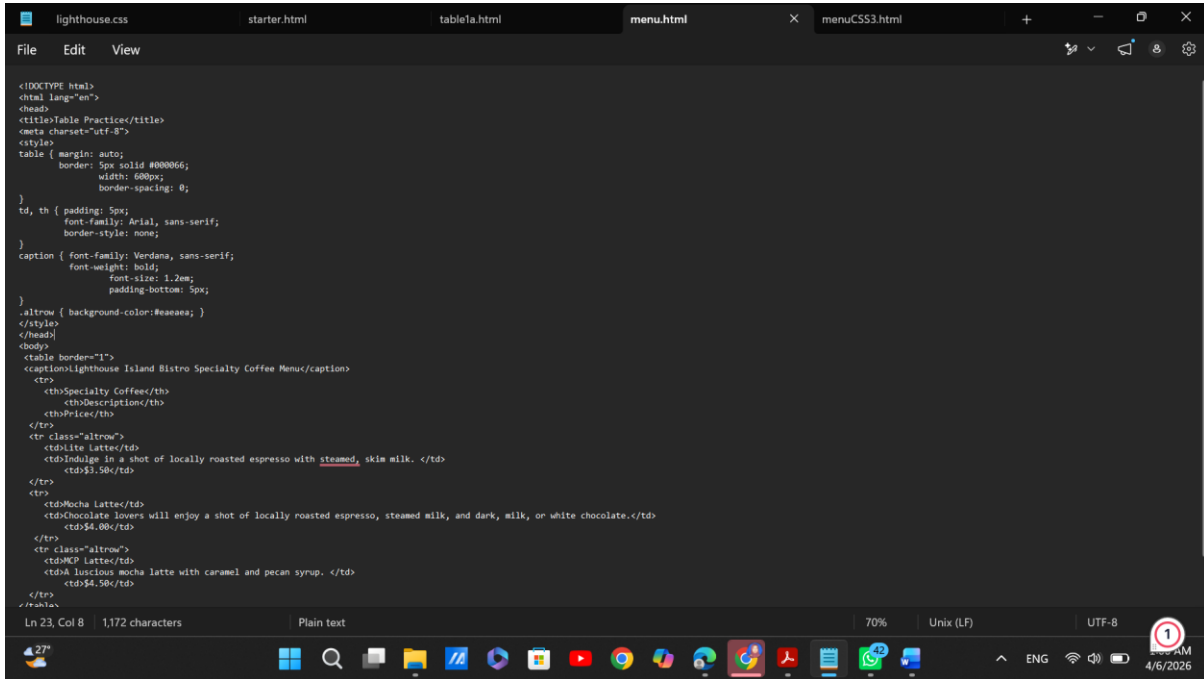

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <title>Table Practice</title>
    <meta charset="utf-8">
    <style>
      table {
        margin: auto;
        border: 5px solid #000066;
        width: 600px;
        border-spacing: 0;
      }
      td, th {
        padding: 5px;
        font-family: Arial, sans-serif;
        border-style: none;
      }
      caption {
        font-family: Verdana, sans-serif;
        font-weight: bold;
        font-size: 1.2em;
        padding-bottom: 5px;
      }
      .altrow { background-color: #eaeaea; }
    </style>
  </head>
  <body>
    <table border="1">
      <caption>Lighthouse Island Bistro Specialty Coffee Menu</caption>
      <tr>
        <th>Specialty Coffee</th>
        <th>Description</th>
        <th>Price</th>
      </tr>
      <tr class="altrow">
        <td>Lite Latte</td>
        <td>Indulge in a shot of locally roasted espresso with steamed, skim milk. </td>
        <td>$3.50</td>
      </tr>
      <tr>
        <td>Mocha Latte</td>
        <td>Chocolate lovers will enjoy a shot of locally roasted espresso, steamed milk, and dark, milk, or white chocolate.</td>
        <td>$4.00</td>
      </tr>
      <tr class="altrow">
        <td>MCP Latte</td>
        <td>Indulge in a shot of locally roasted espresso, steamed milk, and dark, milk, or white chocolate.</td>
        <td>$4.50</td>
      </tr>
    </table>
  </body>
</html>
```

2. View the source code and notice that the second and fourth tr elements are assigned to the altrow class. You won't need this class assignment when using CSS3 structural pseudo-classes. Delete class="altrow" from the tr elements.

3. Examine the embedded CSS and locate the altrow class. Change the selector to use a structural pseudo-class that will apply the style to the even-numbered table rows. Replace .altrow with tr:nth-of-type (even) as shown in the following CSS declaration:

```
tr:nth-of-type(even) { background-color: #eaeaea; }
```

4. Save the file. Display your page in a browser. The table area should look similar to the one shown in Figure 8.9.

5. Let's configure the first row to have a dark blue background (#006) and light gray text (#eaeaea) with the :first-of-type structural pseudo-class. Add the following to the embedded CSS:

```
tr:first-of-type { background-color: #006; color: #eaeaea; }
```

6. Save the file. Display your page in a browser. The table area should look similar to the one shown in Figure 8.10.

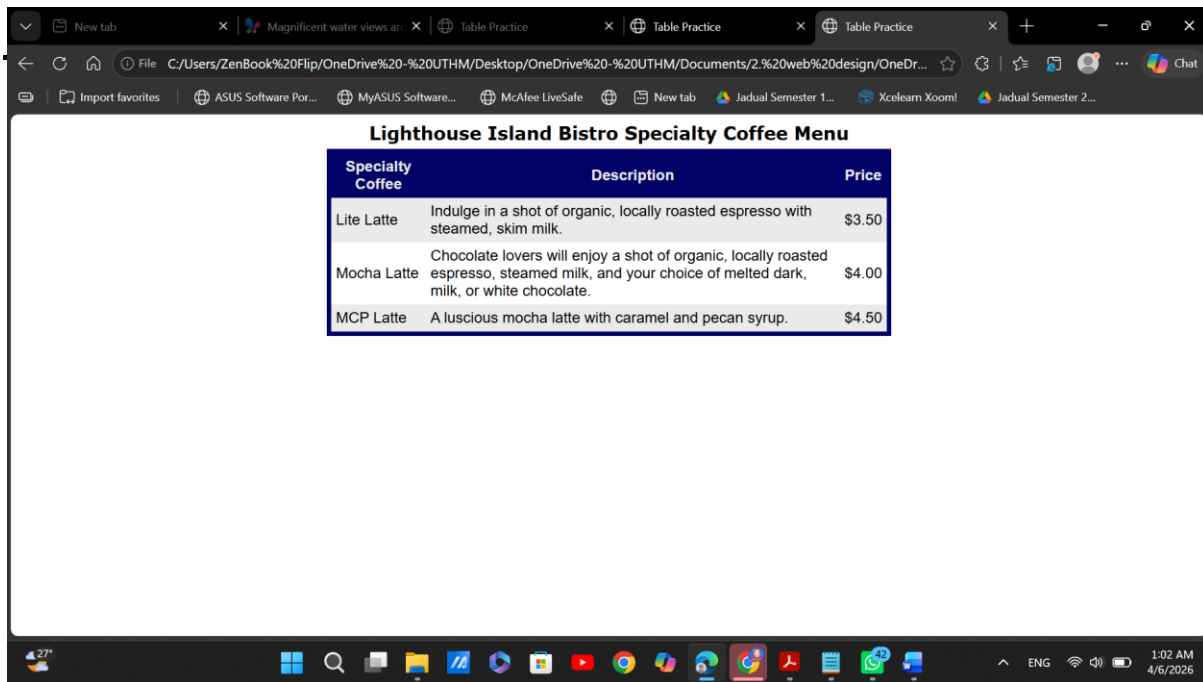


Figure 8.10 CSS3 pseudo-class selectors style the table rows.

Sample codes :

