

## CSE110 lab0&1

## https://github.com/daz005/2022cse110lab1

1) Create the repo with README.md file and add .gitignore file:

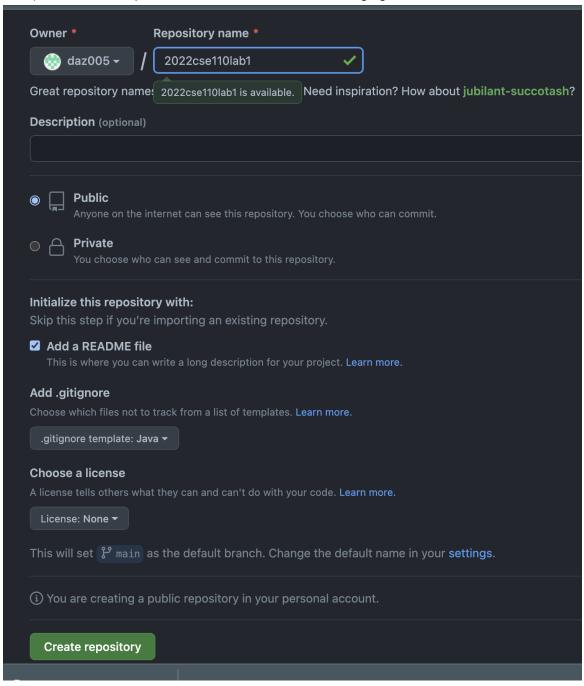

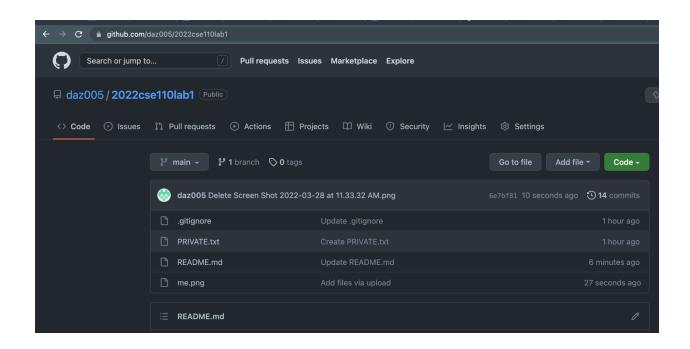

2) Command line to show clone, add, commit and push:

```
az005.github.io — -bash — 101×53
(base) Roberts-iMac-3:lab1 dz$ git clone git@github.com:daz005/cCloning into 'daz005.github.io'...
remote: Enumerating objects: 72, done.
remote: Counting objects: 100% (72/72), done.
remote: Compressing objects: 100% (62/62), done.
remote: Total 72 (delta 32), reused 13 (delta 4), pack-reused 0
Receiving objects: 100% (72/72), 394.83 KiB | 1.04 MiB/s, done.
[Resolving deltas: 100% (32/32), done.
(base) Roberts-iMac-3:lab1 dz$ ls
 (base) Roberts-iMac-3:lab1 dz$ git clone git@github.com:daz005/daz005.github.io.git
 daz005.github.io
(base) Roberts-iMac-3:lab1 dz$ cd daz005.github.io/(base) Roberts-iMac-3:daz005.github.io dz$ ls
                                                                                                                     photo.jpg
 PRIVATE.txt
                          README.md
                                                          index.md
                                                                                        me.png
 (base) Roberts-iMac-3:daz005.github.io dz$ touch new_sample_file.java
 (base) Roberts-iMac-3:daz005.github.io dz$ vi new_sample_file.java
 (base) Roberts-iMac-3:daz005.github.io dz$ git status
 On branch main
 Your branch is up to date with 'origin/main'.
 Untracked files:
     (use "git add <file>..." to include in what will be committed)
 nothing added to commit but untracked files present (use "git add" to track)
 (base) Roberts-iMac-3:daz005.github.io dz$ git add new_sample_file.java
(base) Roberts-iMac-3:daz005.github.io dz$ git commit -m "this is a test" new_sample_file.java
 [main fc0875f] this is a test
 Committer: Derek Zhu <dz@Roberts-iMac-3.local>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate. You can suppress this message by setting them explicitly. Run the following command and follow the instructions in your editor to edit
 your configuration file:
        git config --global --edit
 After doing this, you may fix the identity used for this commit with:
        git commit --amend --reset-author
  1 file changed, 1 insertion(+)
create mode 100644 new_sample_file.java
 (base) Roberts-iMac-3:daz005.github.io dz$ git push
 Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Counting objects: 100% (4/4), done.

Delta compression using up to 4 threads

Compressing objects: 100% (2/2), done.

Writing objects: 100% (3/3), 308 bytes | 308.00 KiB/s, done.

Total 3 (delta 1), reused 0 (delta 0)


remote: Resolving deltas: 100% (1/1), completed with 1 local object.


To github.com:daz005/daz005.github.io.git


3aaa7f5..fc0875f main → main

(base) Roberts-iMac-3:daz005.github.io dz$
```

## 3) VS Code UI:

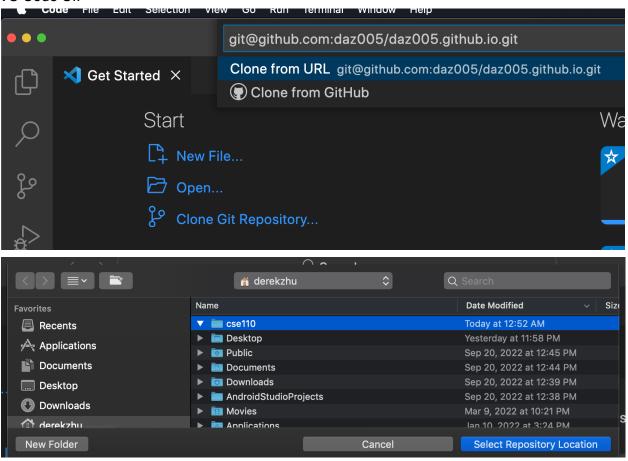

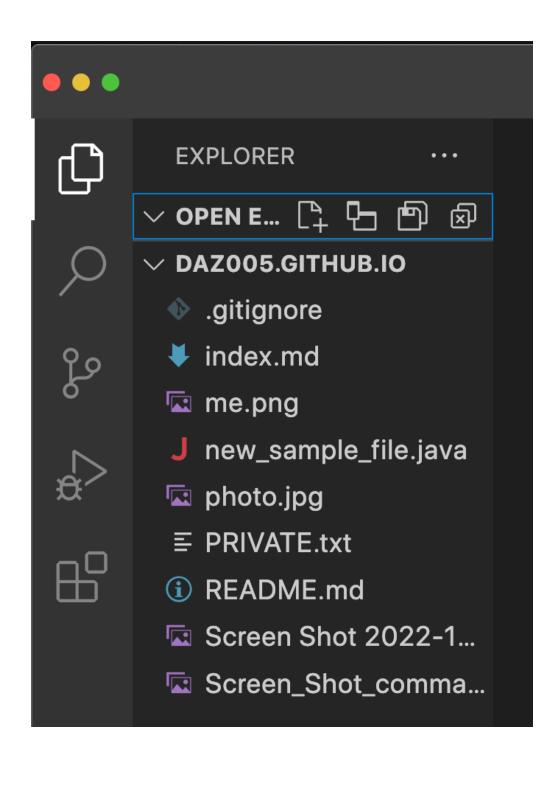

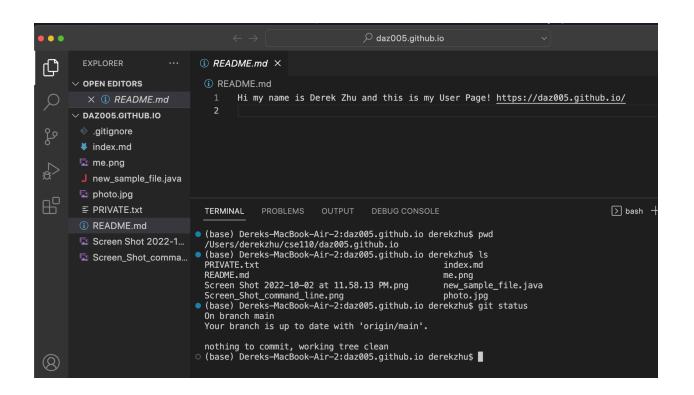

## 4) Publish page:

