

Preparing apps for the store

BUNDLE GUIDELINES

- Ribbon buttons


- Need to have Ribbon Button (not under external tools)
- Add-ins tab (by default)
- Custom tabs (optional)
- Autodesk icon Guidelines.pdf under Revit SDK
- Autodesk WikiHelp > Revit > developers > Appendices > API user Interface Guidelines > Ribbon Guidelines
http://wikihelp.autodesk.com/Revit/enu/2014/Help/3665-Developers/0170-Appendix170/0206-API_User206/0215-Ribbon_G215

- Need to have Ribbon Button (not under external tools)
- Add-ins tab (by default)
- Custom tabs (optional)
- Autodesk Icon Guidelines.pdf under Revit SDK
- Autodesk WikiHelp > Revit > Developers > Appendices > API User Interface Guidelines > Ribbon Guidelines
http://wikihelp.autodesk.com/Revit/enu/2014/Help/3665-Developers/0170-Appendix170/0206-API_User206/0215-Ribbon_G215

- **Revit:** Custom ribbon panels and controls (such as push buttons, split buttons, and radio groups) are primarily managed through the **Revit API** for add-ins. The API allows developers to create custom tabs, add controls, and associate contextual help links.


- Contextual (F1) help

- RibbonItem.SetContextualHelp()
- Link to :
 - External URL
 - Local help file
 - Autodesk help file

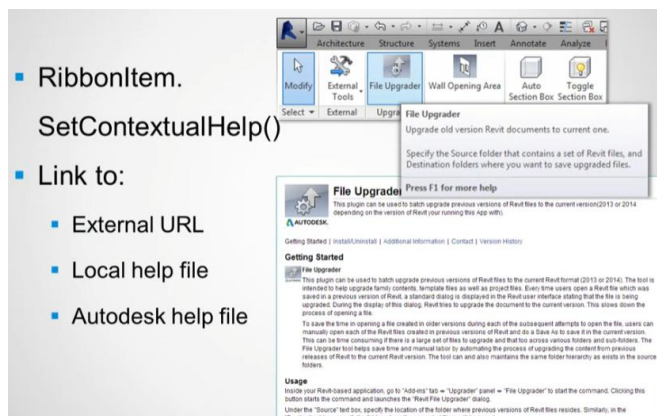


- Install locations


- All users (default)
%ProgramData%\Autodesk\ApplicationPlugins\<myApp>.bundle
- Per User
%AppData%\Autodesk\ApplicationPlugins\<myApp>.bundle

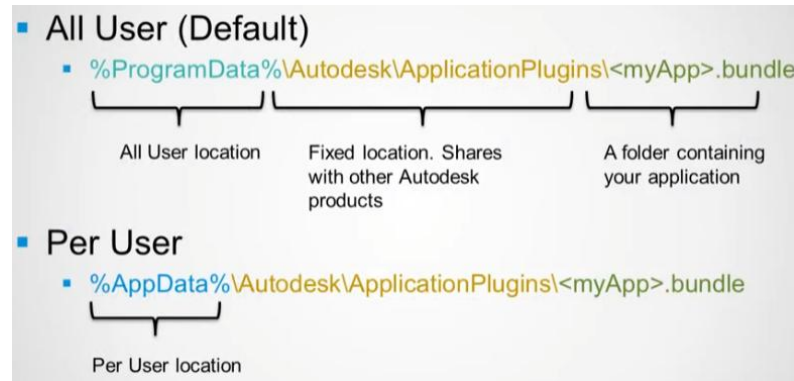

- “Bundle” structure.

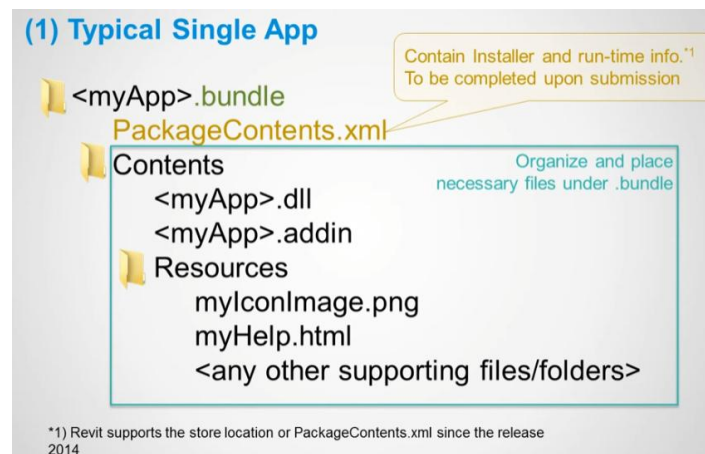

PackageContent is created by autodesk in the initial submission process of the App.

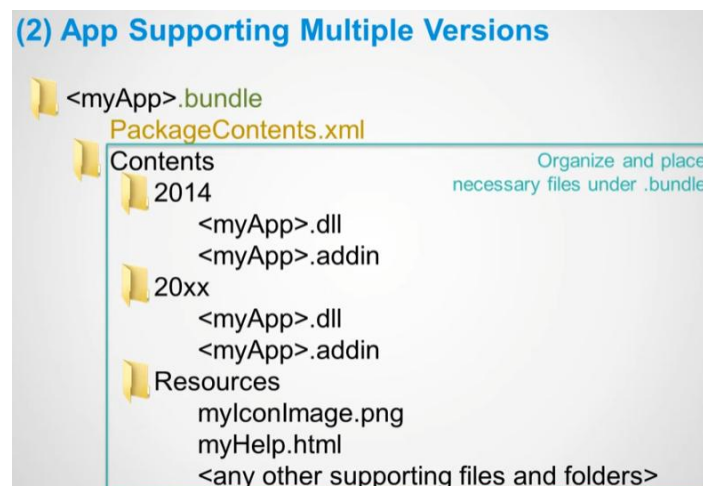

PackageContents.xml

- Generated by Autodesk installer tool after the initial submission of an App (populated from submission information. No need for Publisher to provide as such)
- Contains installer information
- Revit 2014 (and above) Will read this file and pick up the location of .addin manifest
- **Important:** keep it in your bundle once it is generated after the initial submission

PackageContents.xml Populated by Installer

```
<?xml version="1.0" encoding="utf-8"?>
<ApplicationPackage SchemaVersion="1.0">
  <InstallerInformation>
    AutodeskProduct="Revit"
    ProductType="Application"
    Name="File Upgrader"
    AppVersion="2.0.0"
    Description="ADN Plugin of the Month: File Upgrader"
    Author="Saikat Bhattacharya"
    Icons="./Contents/2014/Resources/FileUpgrader_Thumbnail.png"
    OnlineDocumentation="http://labs.autodesk.com/utilities/ADN_Plugins"
    HelpFile="./Contents/2014/Resources/ADNFileUpgraderHelp.htm"
    ProductCode="{F23885C8-05DE-45B9-977E-D860120D2781}"
    UpgradeCode="{5D9F89AD-3CC0-4769-B90D-608FB4EE90DB}"
    FriendlyVersion="2.0.0"
    SupportedLocales="ENU"
    AppNameSpace="appstore.exchange.autodesk.com"
  </InstallerInformation>
  <CompanyDetails Name="Autodesk"
    Url="http://labs.autodesk.com/utilities/ADN_Plugins"
    Email="adn.apps@autodesk.com"
    Phone="" />
  <RuntimeRequirements OS="Win32|Win64"
    Platform="Revit|Revit Architecture|Revit Structure|Revit MEP"
    SeriesMin="R2014"
    SeriesMax="R2014" />
  <Components Description="2014 parts">
    <RuntimeRequirements OS="Win32|Win64"
      Platform="Revit|Revit Architecture|Revit Structure|Revit MEP"
      SeriesMin="R2014"
      SeriesMax="R2014" />
    <ComponentEntry AppName="FileUpgrader"
      Version="2.0.0"
      ModuleName="./Contents/2014/ADNPlugin-FileUpgrader.addin"
      AppDescription="FileUpgrader" />
  </Components>
</ApplicationPackage>
```

Installer information

Summary of components (optional)

Revit run-time info

Location of addin manifest



REVIT APP AUTO LOAD FLOW

1. Revit goes through the common install folder and parse for Revit apps for the appropriate environments (RuntimeRequirements).
2. Revit picks up the location of addin manifest (ModuleName).
3. Read .addin manifest and load the app.

```
<?xml version="1.0" encoding="utf-8"?>
<ApplicationPackage>
  <Components Description="2014 parts">
    <RuntimeRequirements OS="Win32|Win64"
      Platform="Revit|Revit Architecture|Revit Structure|Revit MEP"
      SeriesMin="R2014"
      SeriesMax="R2014" />
    <ComponentEntry AppName="FileUpgrader"
      Version="2.0.0"
      ModuleName="./Contents/2014/ADNPlugin-FileUpgrader.addin"
      AppDescription="FileUpgrader" />
  </Components>
</ApplicationPackage>
```

Minimum PackageContents.xml to load to Revit. Use for testing purposes

ADDIN MANIFEST

- Use the relative path to your dll.

```
<?xml version="1.0" encoding="utf-8" standalone="no"?>
<RevitAddIns>
  <AddIn Type="Application">
    <Name>File Upgrader</Name>
    <Assembly>.\ADNPlugin-FileUpgrader.dll</Assembly>
    <ClientId>BEA80927-9044-4c31-AAE1-48AB3527AAAA</ClientId>

    <FullClassName>ADNPlugin.Revit.FileUpgrader.Ribbon</FullClassName>
    <VendorId>ADNP</VendorId>
    <VendorDescription>Autodesk,
www.autodesk.com</VendorDescription>
  </AddIn>
</RevitAddIns>
```

Relative path to your dll

-By default, Revit Will load addins without restarting Revit

If you want to change this behaviour, add the flag (Revit support in-session loading since the release 2014. Earlier releases require restarting Revit):

```
<AllowLoadIntoExistingSession>>false</AllowLoadIntoExistingSession>
```

Preparing Apps for the Store: Guidelines

- Ribbon buttons
- Contextual (F1) help
- Install locations
- "Bundle" structure

Next: App Submission Processes

PUBLISHING INFO

