Final policy returns under both shifts

Higher / less-negative discounted return is better • 20k checkpoint • 32 paired evaluation starts per seed

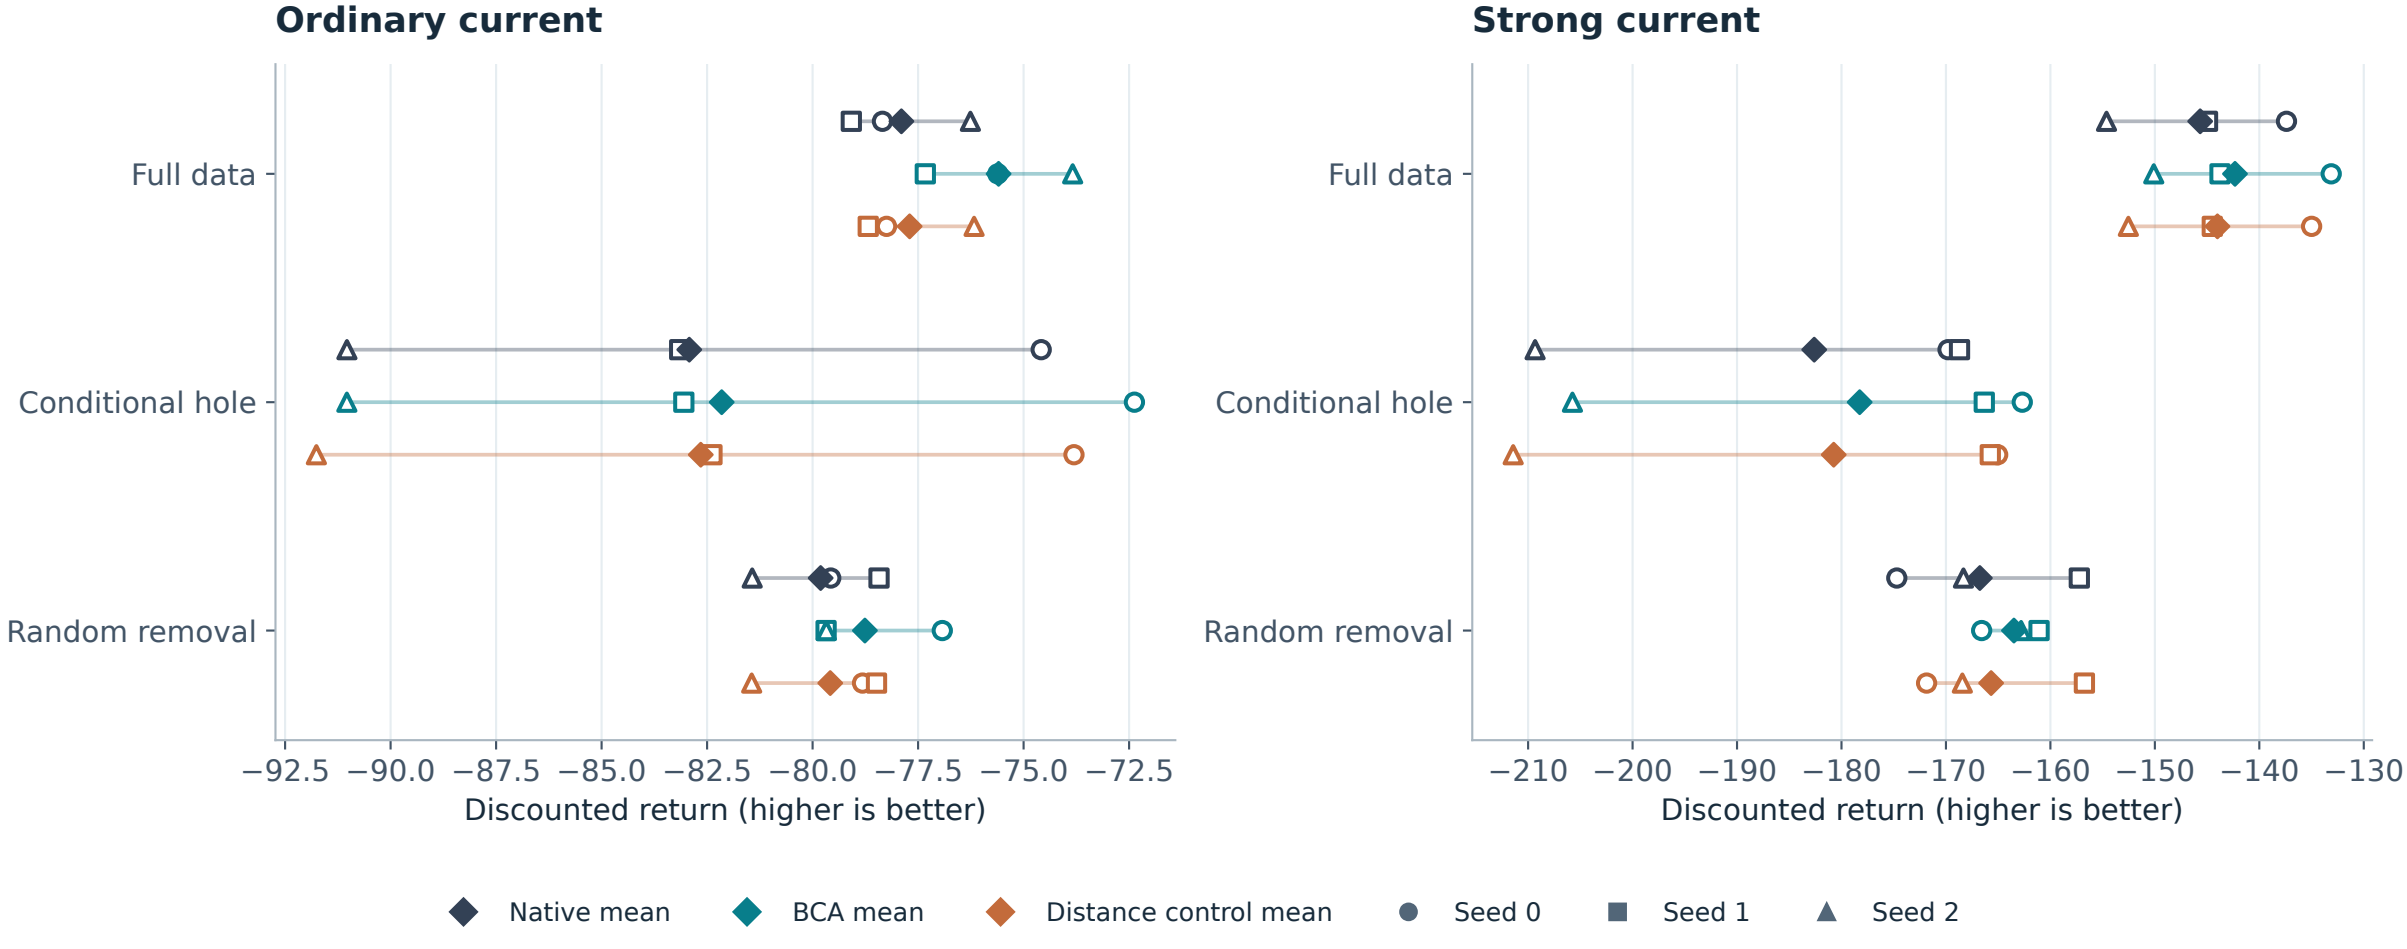

Each open marker is one training-seed mean. Diamonds average the three seeds equally. X-axis ranges differ across contexts.
Source: authenticated rerun; one fixed dataset and removal mask. Strong current changes the observed initial-current law.