Native baseline: optimism and unsupported choices

Raw critic errors, true candidate values and executed exposure are distinct measurements.

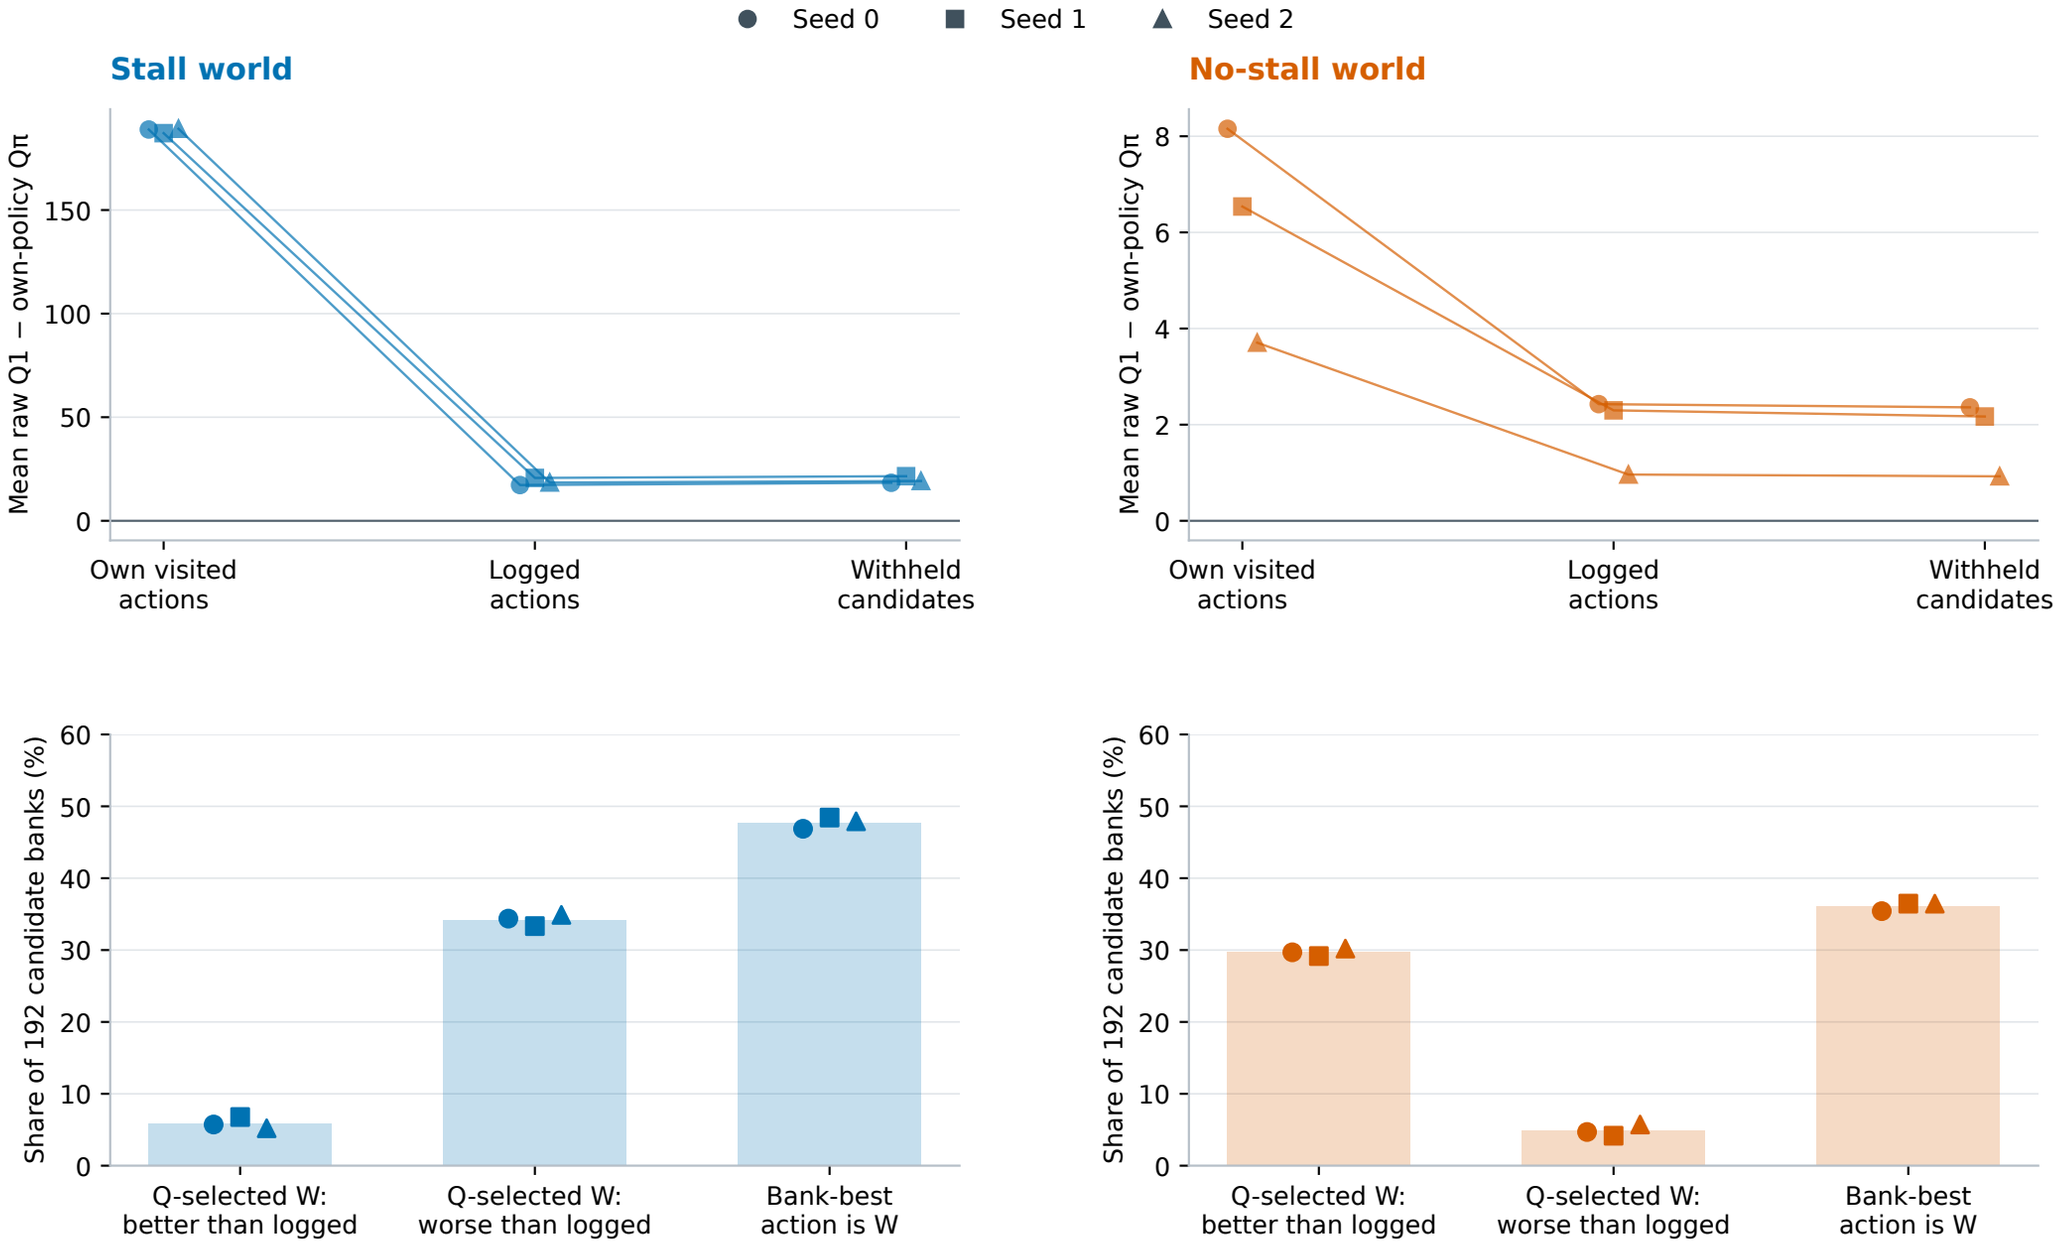

Own probes: 48 per model on its visited states. Candidate probes: 192 shared states × 4 actions per model. Top-panel scales differ.
W is the constructed a0 cutoff gap, not full joint support. Lower-valued than logged is not the same event as positive Q error.