



Week 2: Automating Data validation


1. Click “Create New”

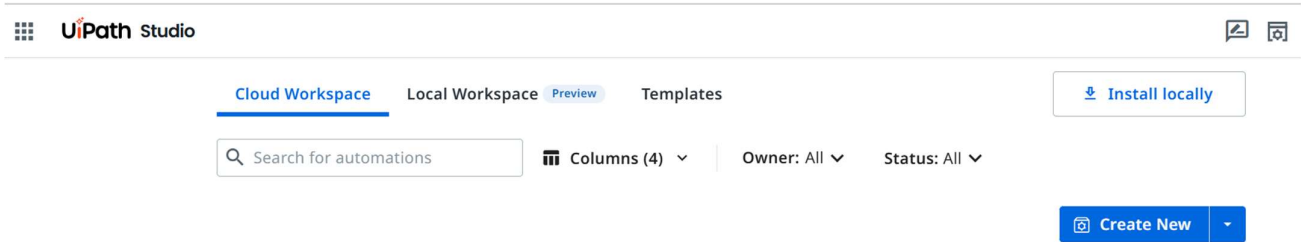


2. Rename “Solution” to “Data Validation”

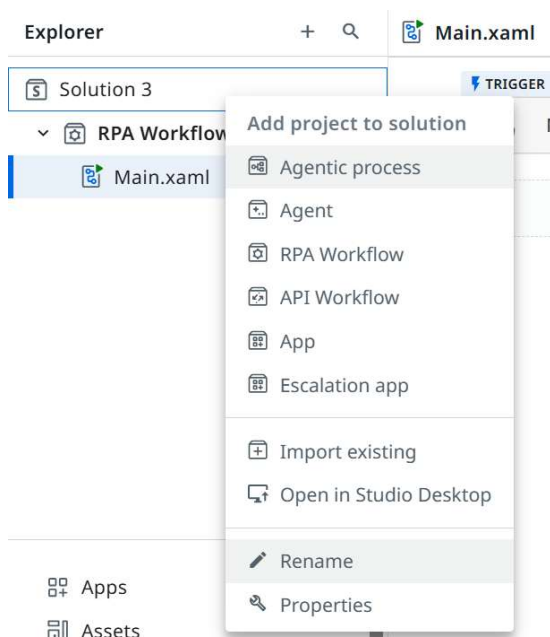


3. Add "For Each Row in Spreadsheet" Google Workspace activity

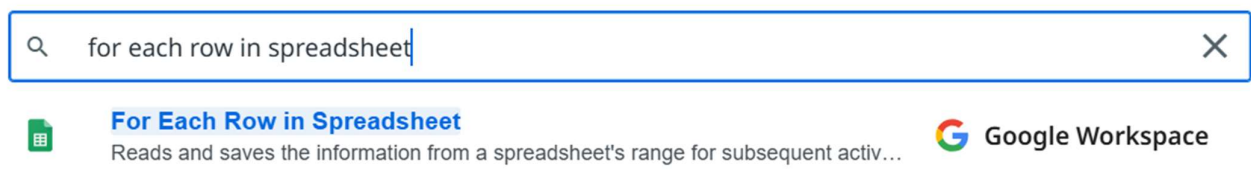


4. Browse and select the spreadsheet that contains the account details and click Save.

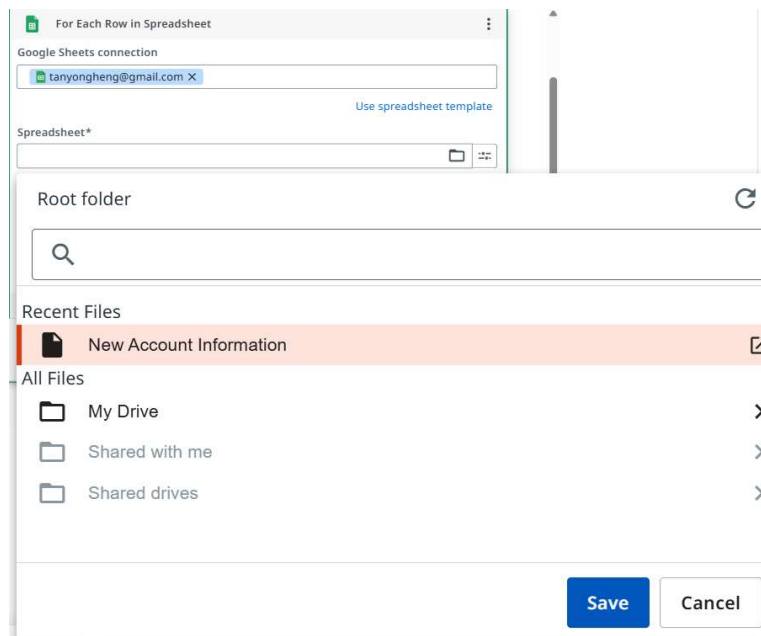


5. Select the range.

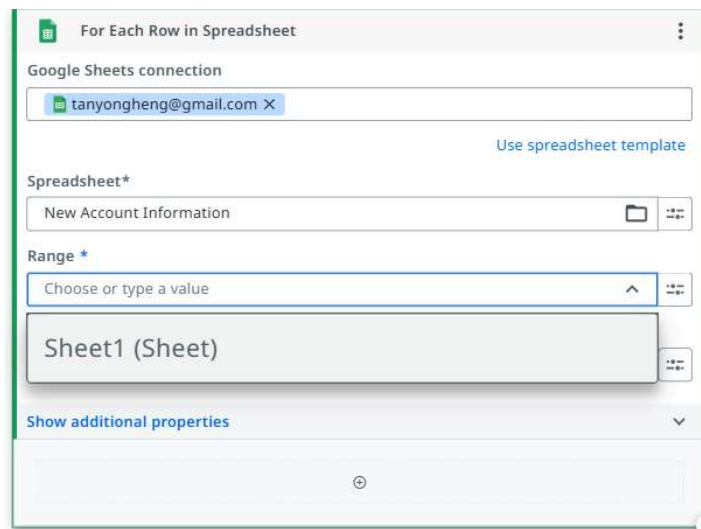


6. Next we will validate the email addresses and first name Start by adding an "If" activity.

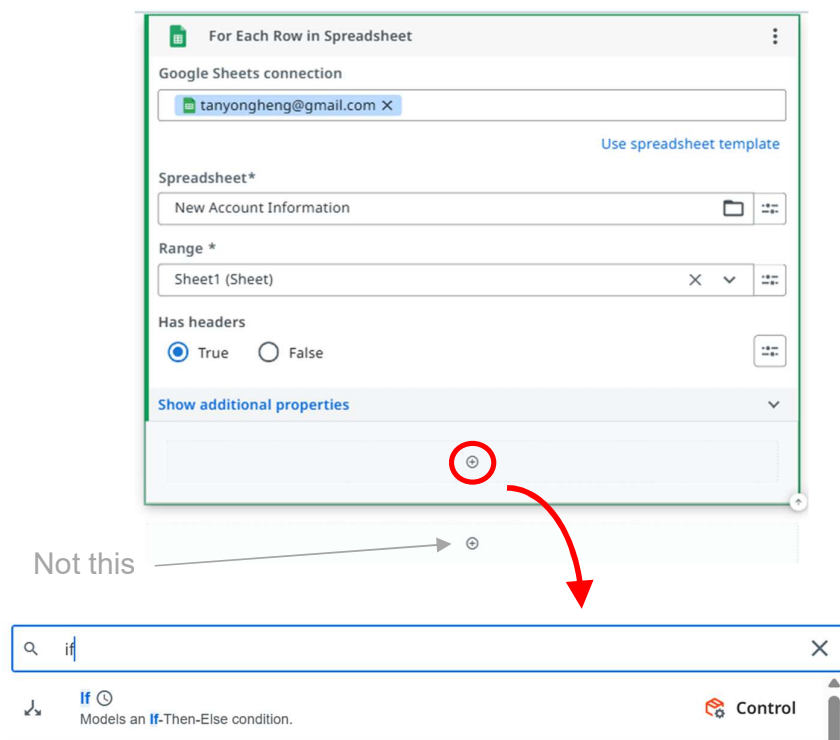


7. Click on the condition builder and start adding each condition one by one.

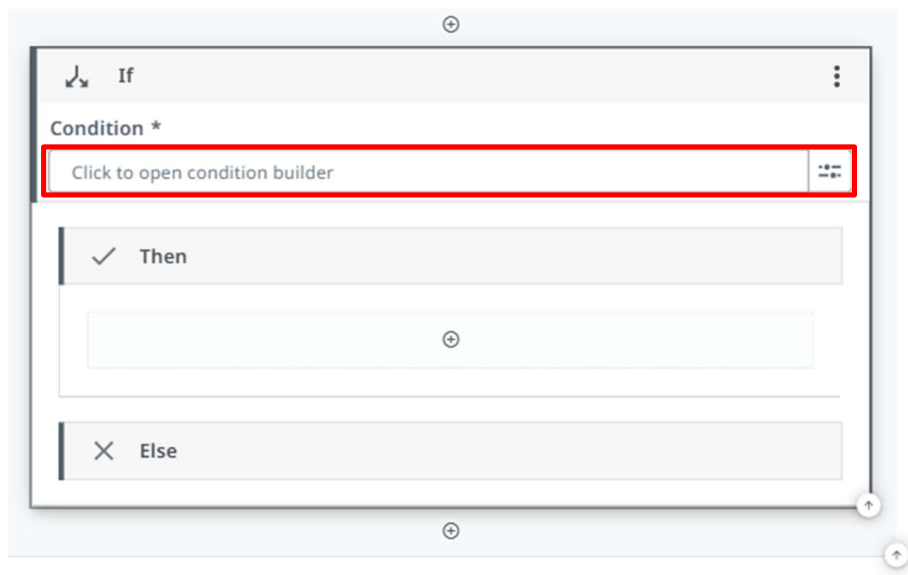

Condition builder

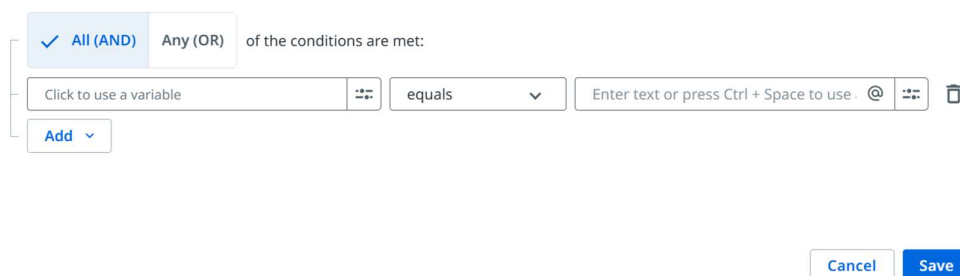

8. Click Open expression editor

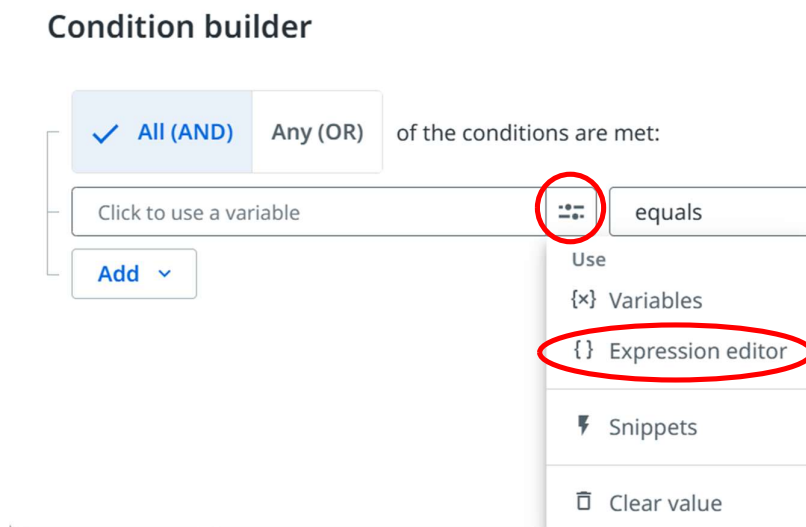

9. Click Open expression editor



In the expression editor:

- Key in: `System.Text.RegularExpressions.Regex.IsMatch(`
- Insert variable → Email
- Key in: `,"^[\\w\\.]+@\\w+\\.\\w+$"`

Regex (Regular Expression) pattern explained:

- `^` → start
- `\\w+` → some text (letters, numbers) (e.g. abc)
- `\\.` → dot (eg. abc.)
- `\\w+` → some text (letters, numbers) (eg. abc.def)
- `@` → must have @ (eg. abc.def@)
- `\\w+` → some text after @ (abc.def@gmail)
- `\\.` → must have a dot (.) (abc.def@gmail.)
- `\\w+` → some text after the dot (abc.def@gmail.com)
- `$` → end of the text

After keying in expression, click save.

Fix {x} Insert variable

1 System.Text.RegularExpressions.Regex.IsMatch(CurrentRow.Email, "\\w+\\.+\\w+@\\w+\\.\\w+\$")

Describe your expression here. Use Ctrl+Space to insert variables.

Activity test input ▶ Test

Email

Enter text

Expression output

Press test to view output

Cancel Save

10. Change the condition to “is true”

Condition builder

✓ All (AND) Any (OR) of the conditions are met:

System.Text.RegularExp... X

equals

is empty text

is not empty text

is true

Add

11. Click on condition and click “Add” Condition

If

Condition *

System.Text.RegularExpressions.Regex.IsMatch(CurrentRow.E...

Condition builder

✓ All (AND) Any (OR) of the conditions are met:

System.Text.RegularExp... @

eq

Add

Condition

Group

Condition builder

✓ All (AND)

Any (OR)

 of the conditions are met:

f_x

System.Text.RegularExp...

@

⋮

equals

▼

true

⋮

🗑

Click to use a variable

⋮

equals

▼

Enter text or press Ctrl + Space to use . @ ⋮

🗑

Add ▼

Cancel

Save

12. In the second condition, choose “First name” and “is not empty text”

Condition builder

✓ All (AND)

Any (OR)

 of the conditions are met:

f_x

System.Text.RegularExp...

@

⋮

equals

▼

true

⋮

🗑

{x} Current row First name X

⋮

is not empty text

▼

🗑

Add ▼

Cancel

Save

Note:

The AND and OR operators are used to determine how multiple conditions should be evaluated. We have chosen the AND operator, which means the automation requires all conditions to be true for the entire expression to evaluate as true and for the workflow to proceed. If you select OR operator, any of the conditions must be true for the expression to evaluate as true. This allows the automation to proceed if at least one condition is met.

13. In the If-Then block, add a “Set Variable Value” activity

🔍

set variable value

✕

🔗

Set Variable Value

🕒

Assign a value to a variable, enabling its reuse in subsequent activities within the workflow.

🔧

Control

Assign Variable Value

To variable* Output

Click to use a variable

Set value *

Enter text

Use

- {x} Change variable
- { } Expression editor
- x+ Create variable

Create variable

Variable name*

status_value

Scope*

Main

Type*

Text

Default value

Enter text

Cancel Create

To variable: Create a new variable called "status_value"

Type: Text

14. Set Value to Passed


The screenshot shows the 'Assign Variable Value' activity configuration window. It has a title bar with a person icon and a menu icon. The main area is divided into two sections: 'To variable*' and 'Set value *'. The 'To variable*' section has a text input field containing '{x}status_value X' and a dropdown menu icon. The 'Set value *' section has a text input field containing 'Passed' and a dropdown menu icon.

15. In the If-Else block, add a “Set Variable Value” activity


To variable: Choose “Change Variable” this time

The screenshot shows the 'Else' block configuration window. It has a title bar with a close icon and the text 'Else'. The main area contains an 'Assign Variable Value 1' activity. The activity has a title bar with a person icon and a menu icon. The main area is divided into two sections: 'To variable*' and 'Set value *'. The 'To variable*' section has a text input field containing 'Click to use a variable' and a dropdown menu icon. The 'Set value *' section has a text input field containing 'Enter text' and a dropdown menu icon. A red circle highlights the dropdown menu icon in the 'To variable*' section. A dropdown menu is open, showing three options: 'Use', '{x} Change variable', and '{} Expression editor'. The 'Use' option is selected.

Choose “status_value” in the dropdown menu

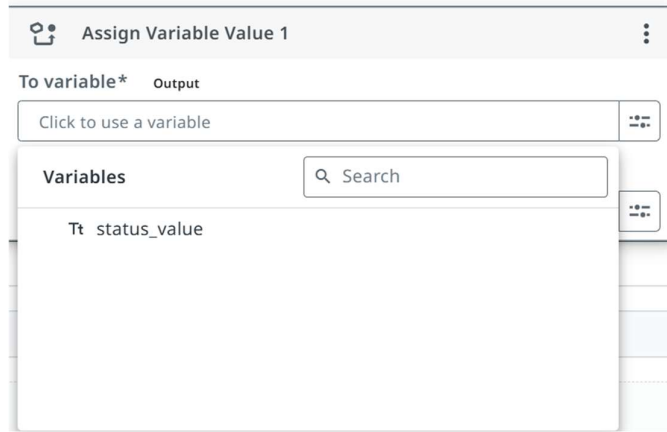

16. Set value to Failed

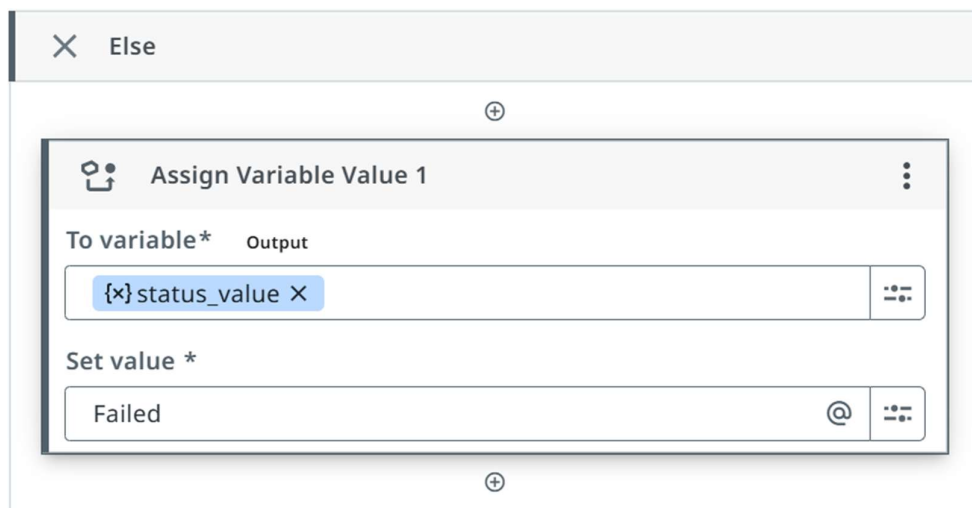

17. Outside of "If" block but within the "For Each Row in Spreadsheet" block, add a "Write Cell" activity



Write Cell

Google Sheets connection

tanyongheng@gmail.com X

Spreadsheet*

New Account Information

Sheet or named range *

Sheet1 (Sheet) X v

Cell

`"H" + (CurrentRowIndex+2).ToString` X

What to write*

{x} status_value X

In the cell field, key in the value using Expression Editor:

VB Expression editor Write Cell > Cell (Tt String)

VB Expression editor

1 "H" & (CurrentRowIndex + 2).ToString

Note:

The + 2 offset is required to align the robot's internal logic with the physical layout of the spreadsheet. In UiPath, the CurrentRowIndex follows "zero-based indexing," where the first item processed is labeled as 0. Because Google Sheets starts its numbering at 1 and typically uses the first row for headers, the first row of actual data is physically Row 2. Adding 2 to the index ensures the automation correctly maps the first loop iteration to the first data row, preventing the robot from overwriting headers or attempting to write to a non-existent "Row 0."

18. Now, we are ready to test. Click “Debug on Cloud” and run. Check your spreadsheet after project is run successfully.