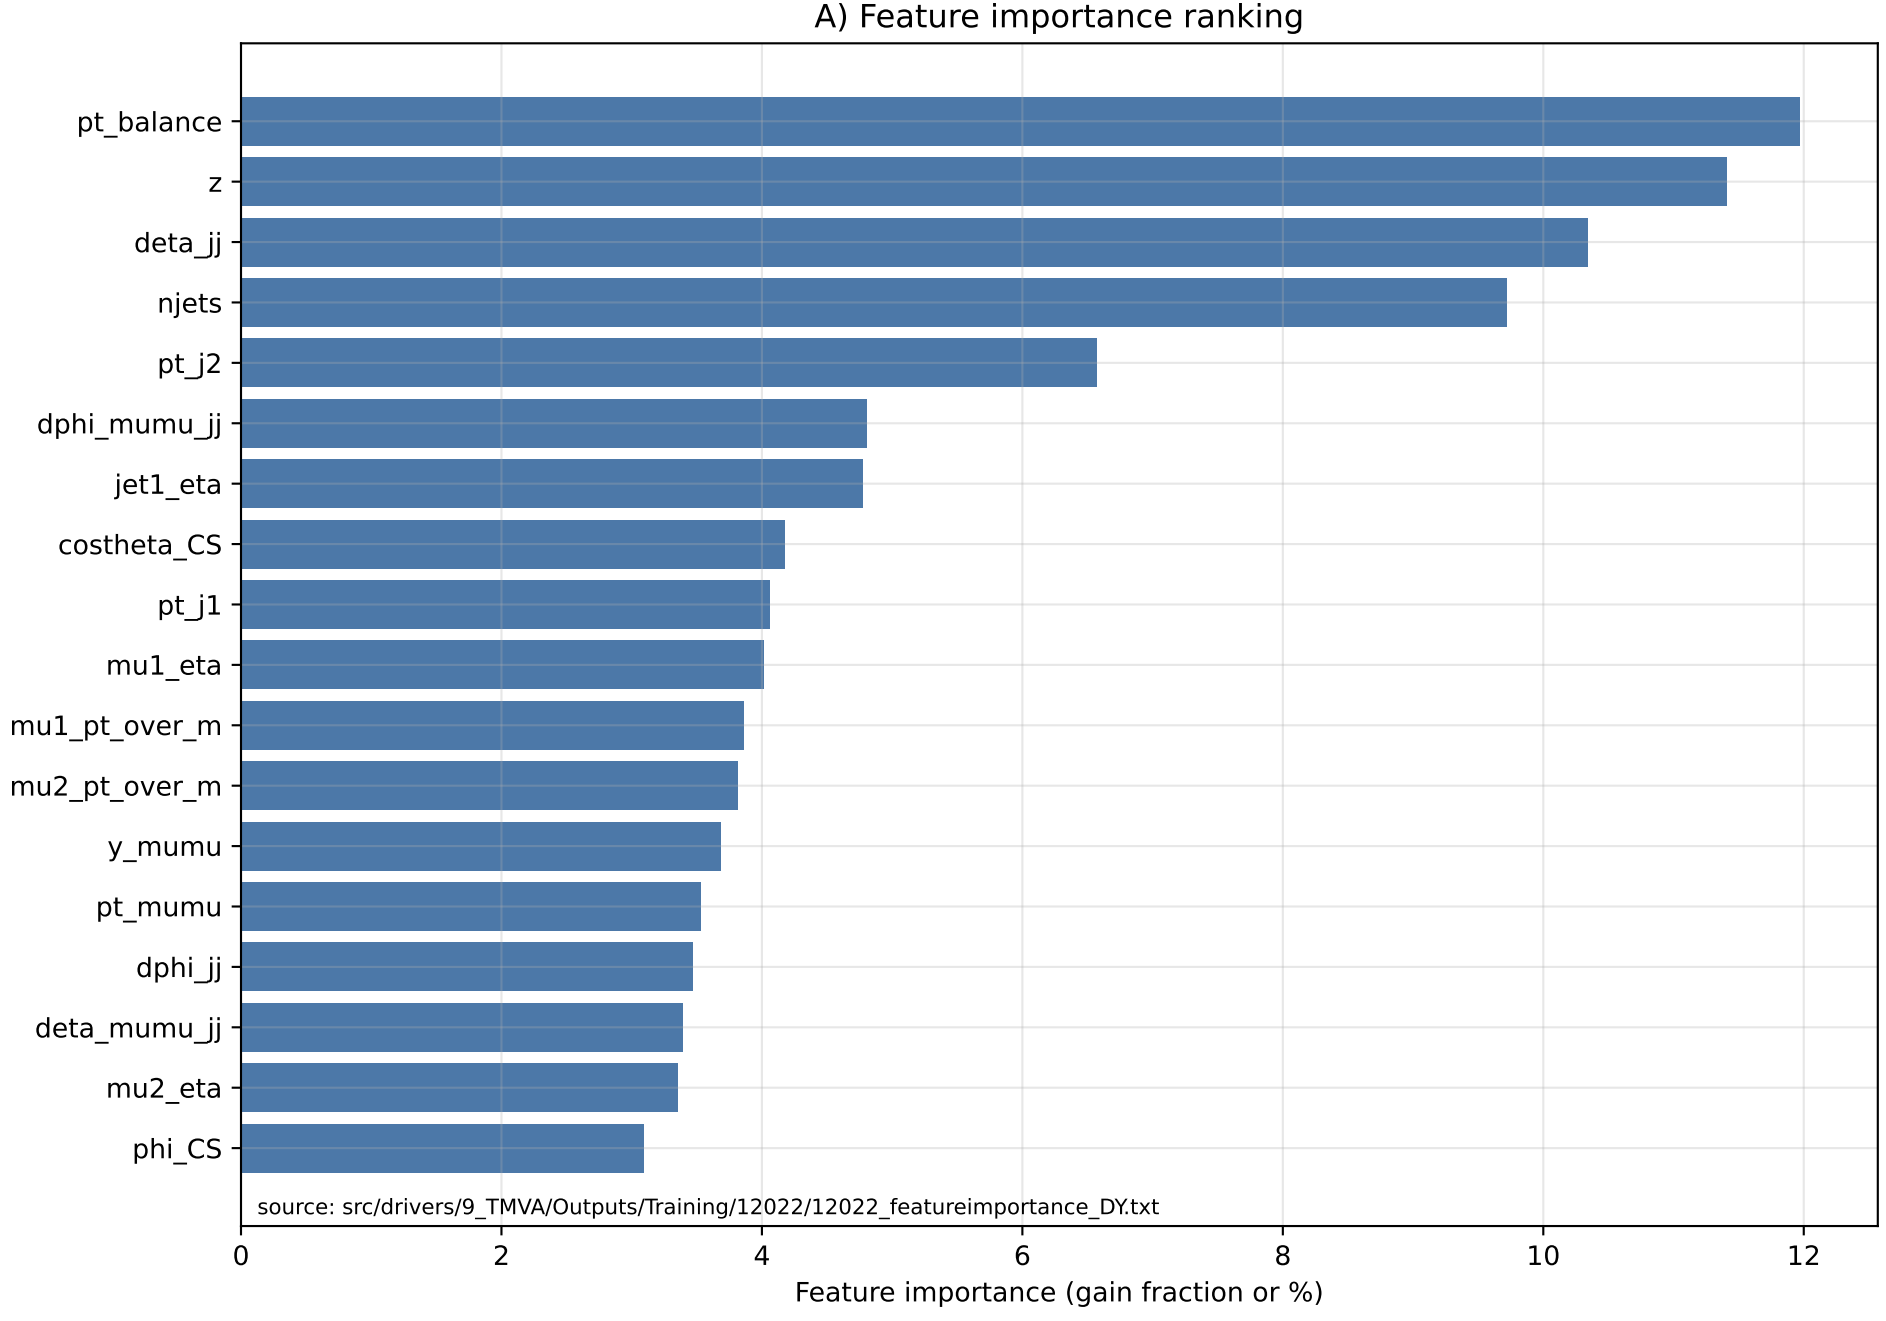
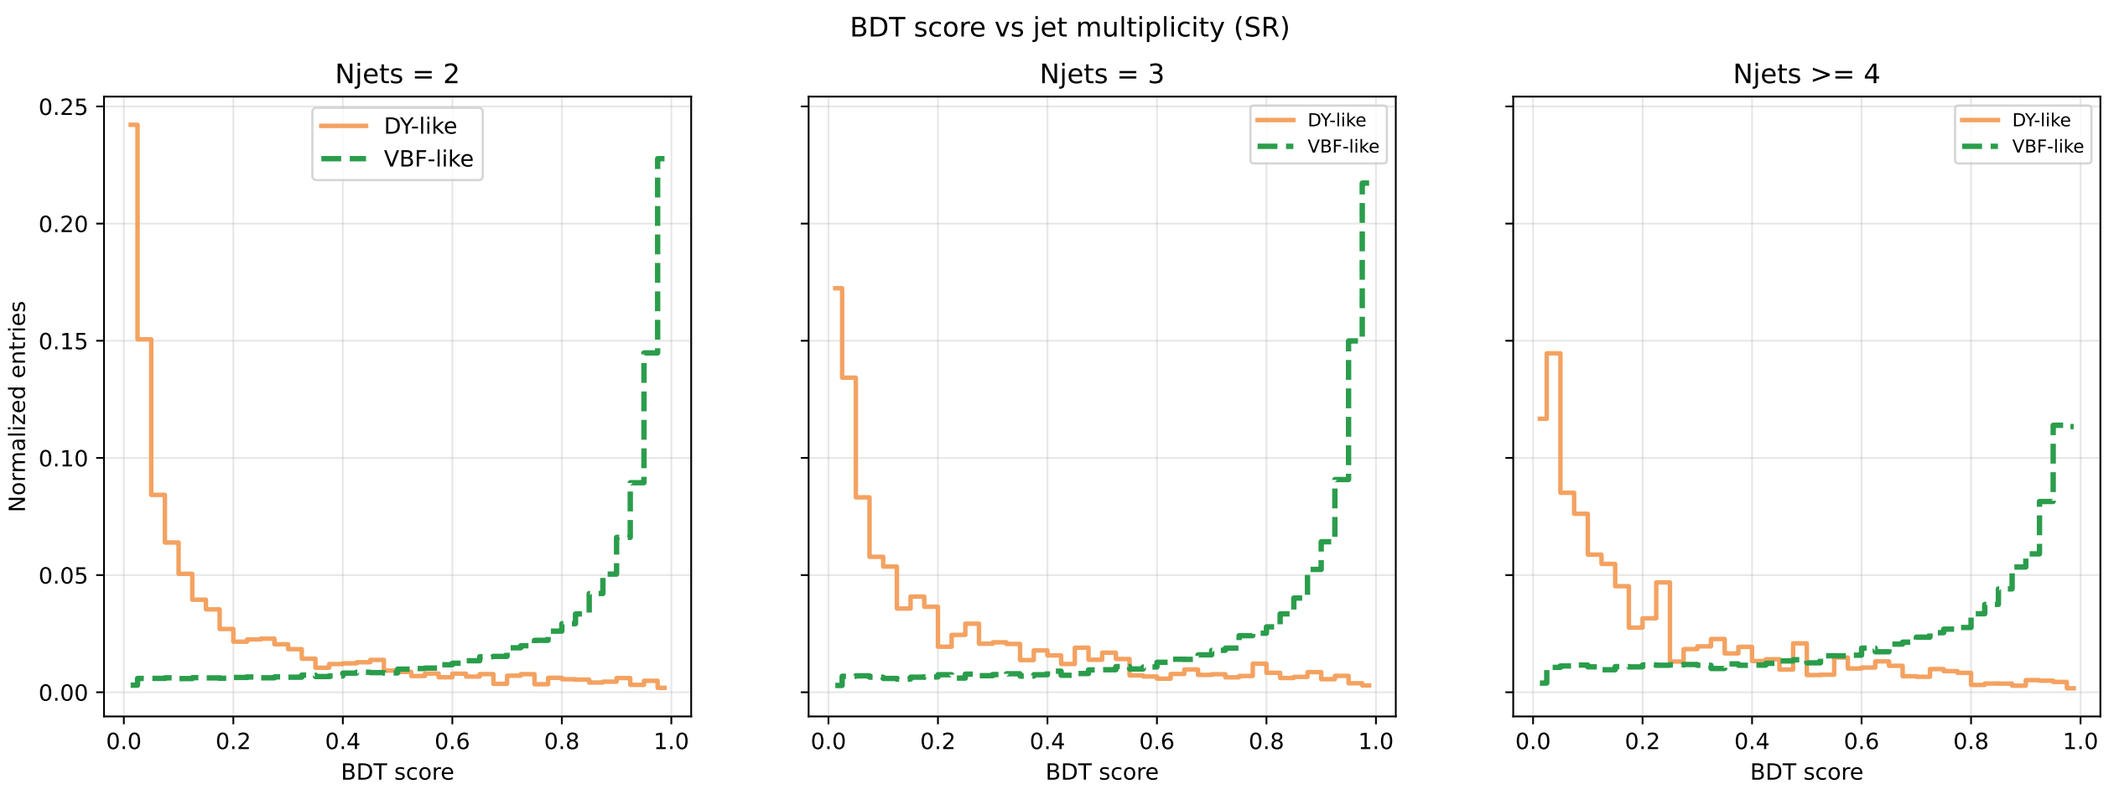
VBF BDT Validation - 12022


```
Standalone per-era diagnostic script: bdt_validation.py
Logic references: ScanYields / PlotScored / MassSculpt / KS_perfold / DataMC
Resolved branches: {'score': 'bdt_score', 'weight': 'weight', 'mass': 'm_mumu', 'njets': 'njets', 'mjj': None, 'de
```


Requested VBF feature cross-check


requested	status	resolved_as	notes
jet1_qgl	missing	-	not found in tree branches
jet1_eta	exact	jet1_eta	
jet2_eta	proxy	y_j2	rapidity, not eta
jet1_pt	alias	pt_j1	
jet2_pt	alias	pt_j2	
mjj	missing	-	not found in tree branches
dEta_jj	alias	deta_jj	
dPhi_jj	alias	dphi_jj	
mmj_min_dEta	proxy	deta_mumu_jj	dimuon-dijet deta, not min(mu,jet)
mmj_min_dPhi	proxy	dphi_mumu_jj	dimuon-dijet dphi, not min(mu,jet)
pt_centrality	proxy	z	zeppenfeld variable, not pt centrality
dimuon_pt	alias	pt_mumu	
dimuon_rapidity	alias	y_mumu	
dimuon_cos_theta_cs	alias	costheta_CS	
dimuon_phi_cs	alias	phi_CS	
dimuon_mass_resolution	missing	-	not found in tree branches
mu1_pt_over_mass	alias	mu1_pt_over_m	
mu2_pt_over_mass	alias	mu2_pt_over_m	
mu1_eta	exact	mu1_eta	
mu2_eta	exact	mu2_eta	
N_jets	alias	njets	
year	derived	year=12022	from --era


A) Feature importance ranking
pt_balance
z
deta_jj
njets
pt_j2
dphi_mumu_jj
jet1_eta
costheta_CS
pt_j1
mu1_eta
mu1_pt_over_m
mu2_pt_over_m
y_mumu
pt_mumu
dphi_jj
deta_mumu_jj
mu2_eta
phi_CS
source: src/drivers/9_TMVA/Outputs/Training/12022/12022_featureimportance_DY.txt
0
2
4
6
8
10
12
Feature importance (gain fraction or %)


BDT score vs jet multiplicity (SR)
Njets = 2
Njets = 3
Njets >= 4
DY-like
VBF-like
Normalized entries
BDT score
0.00
0.05
0.10
0.15
0.20
0.25
0.0
0.2
0.4
0.6
0.8
1.0

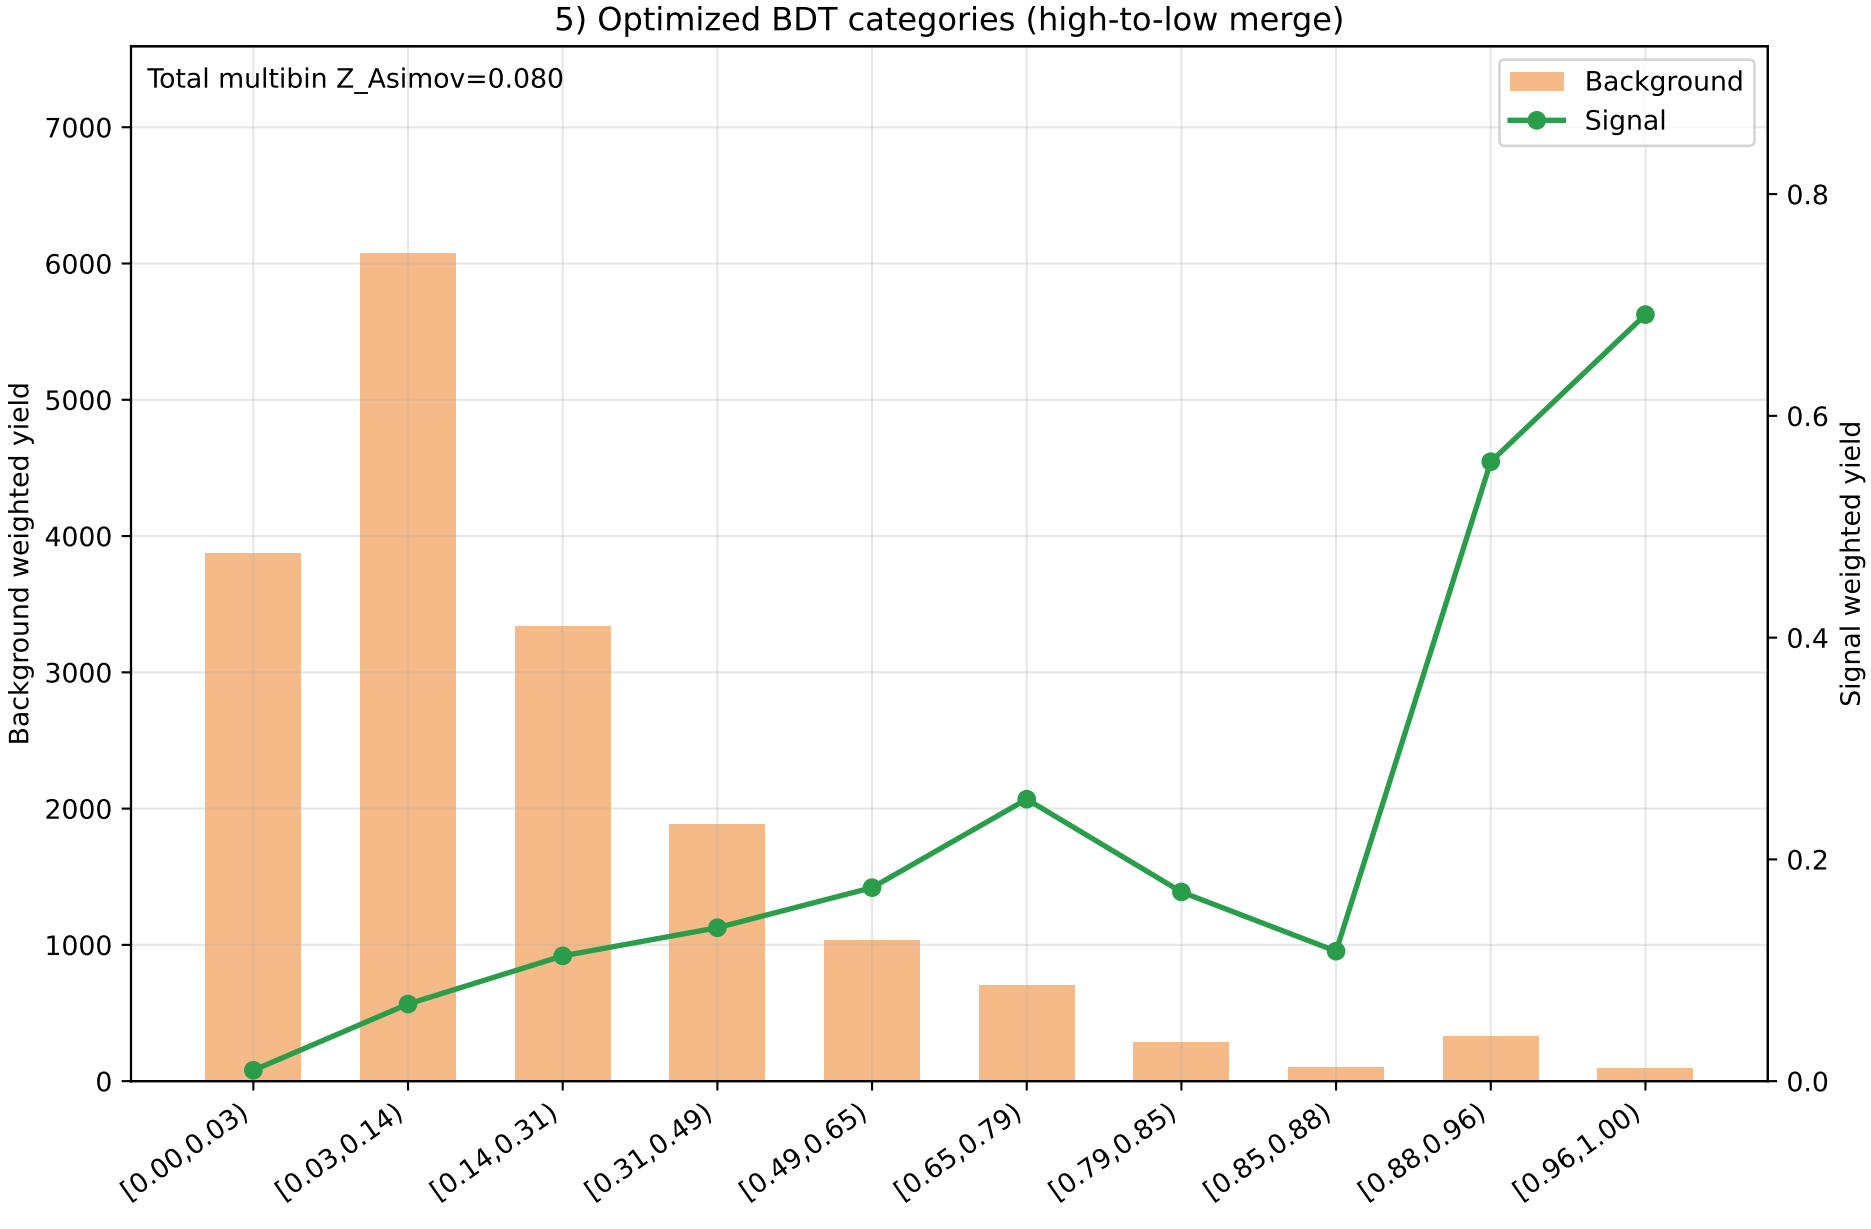
5) Optimized BDT categories (high-to-low merge)
Total multibin Z_Asimov=0.080
Background
Signal
Background weighted yield
Signal weighted yield
0
1000
2000
3000
4000
5000
6000
7000
0.0
0.2
0.4
0.6
0.8
[0.00,0.03)
[0.03,0.14)
[0.14,0.31)
[0.31,0.49)
[0.49,0.65)
[0.65,0.79)
[0.79,0.85)
[0.85,0.88)
[0.88,0.96)
[0.96,1.00)

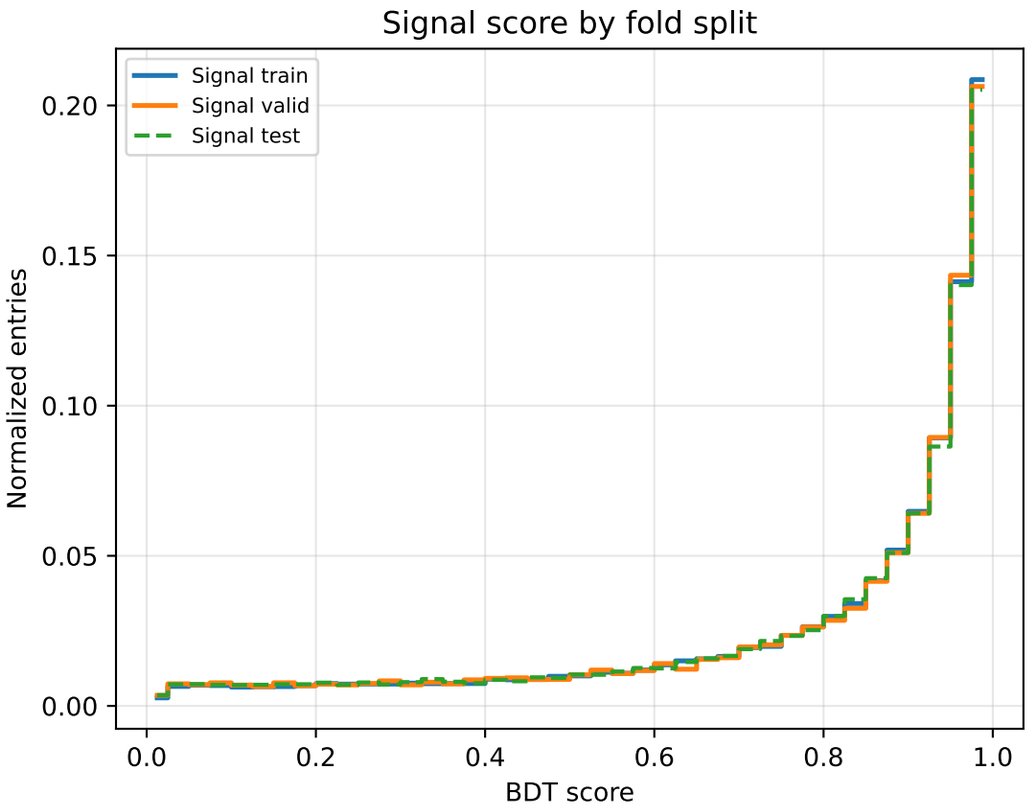

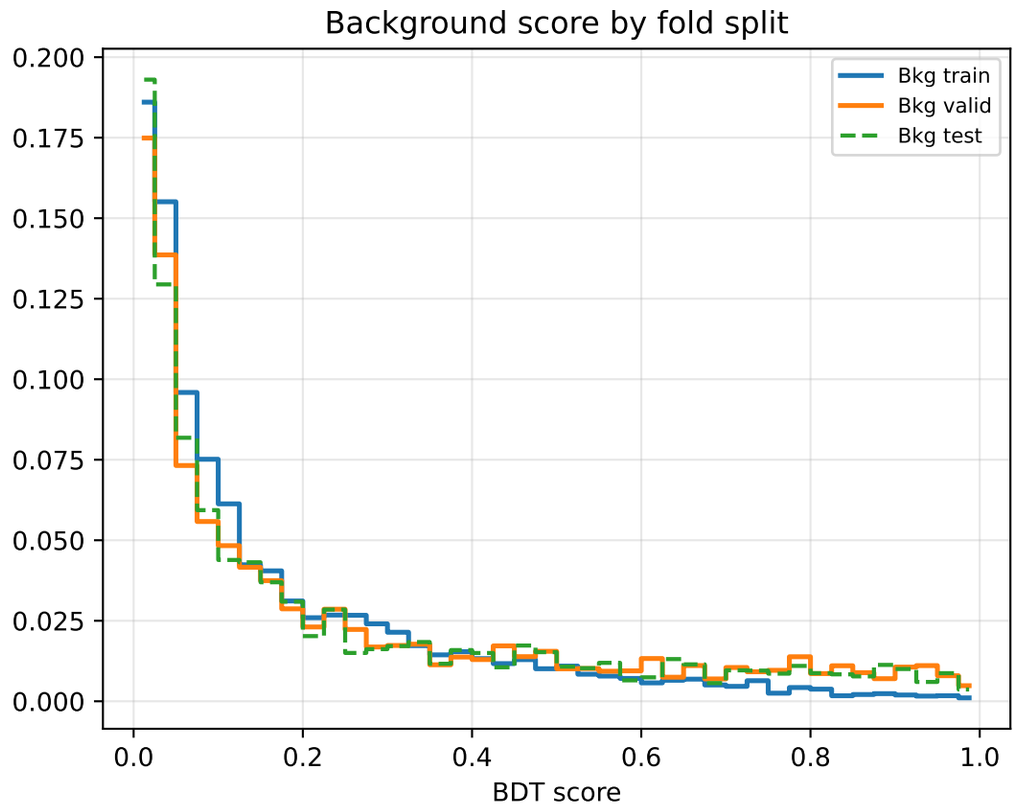



Fold-based KS checks (train vs validation)


KS thresholds: Run2-loose: p>=0.01, D<=0.15; Run2-nominal: p>=0.05, D<=0.1; Run2-tight: p>=0.1, D<=0.07

Sample	N train	N valid	N test	Mean(train)	Mean(valid)	Mean(test)	KS D	KS p	Run2-loose	Run2-nominal	Run2-tight
Signal	63228	31614	31614	0.7904	0.7861	0.7847	0.0062	0.3885	**PASS**	**PASS**	**PASS**
Background	95636	47814	47812	0.1789	0.2510	0.2405	0.0118	0.000279	**FAIL**	**FAIL**	**FAIL**

Corr(score, njets): signal=-0.131, background=0.031

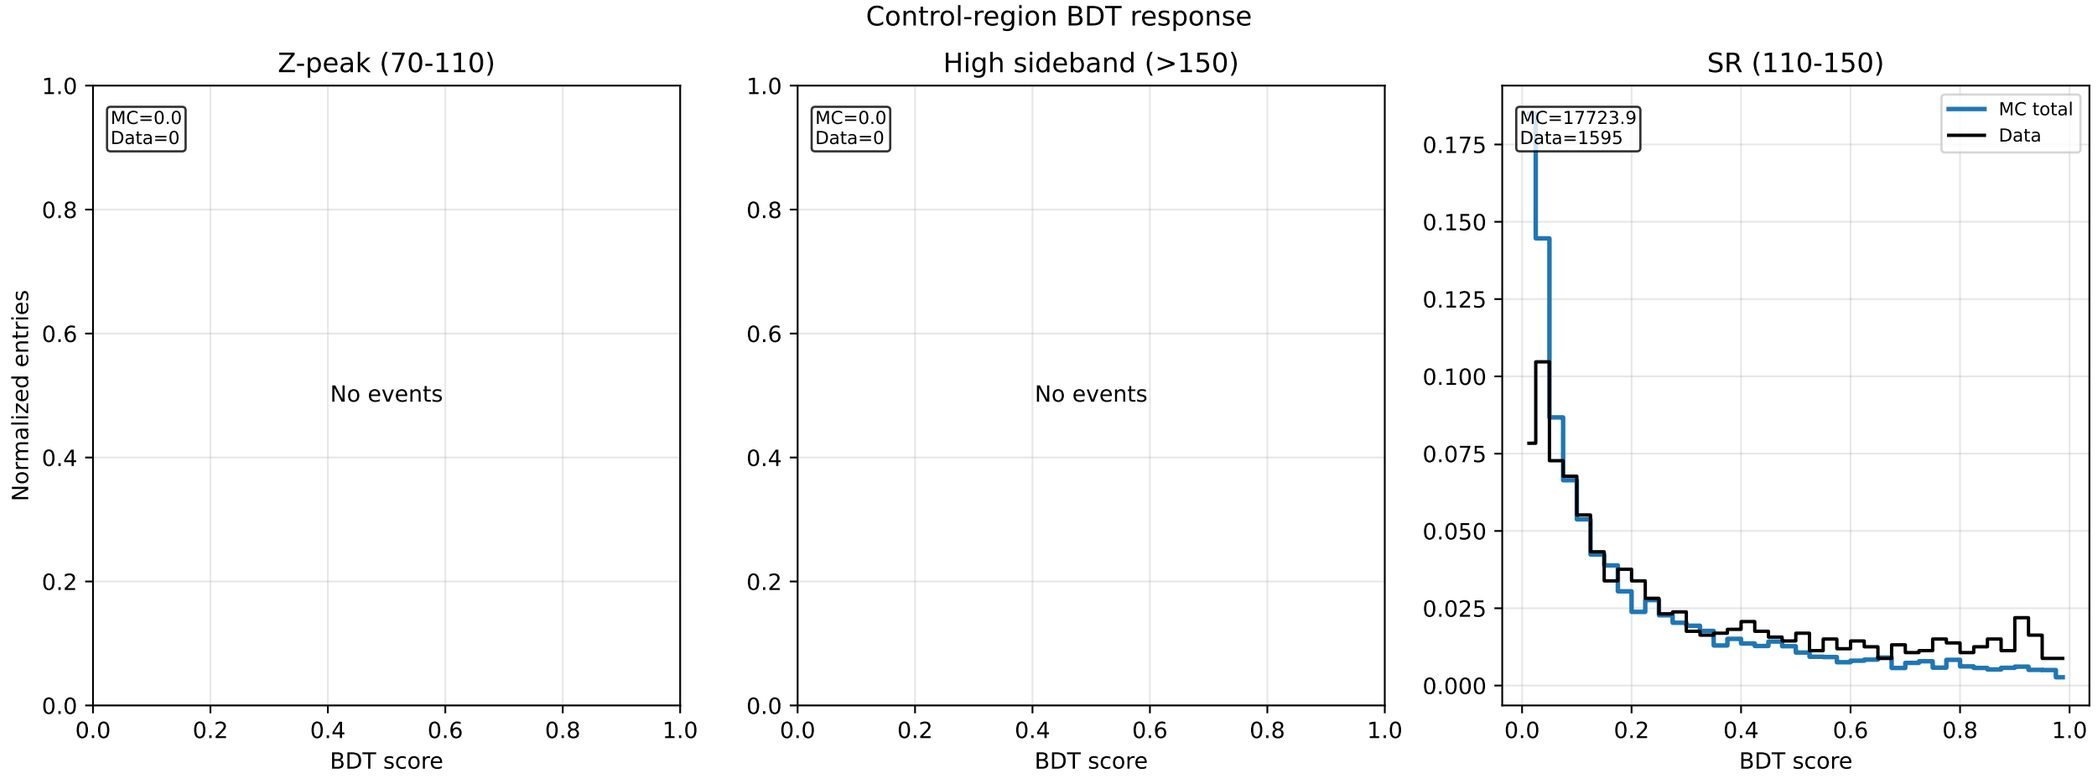
Control-region BDT response
Z-peak (70-110)
High sideband (>150)
SR (110-150)
MC=0.0
Data=0
No events
MC=17723.9
Data=1595
MC total
Data
Normalized entries
BDT score
0.0
0.2
0.4
0.6
0.8
1.0
0.000
0.025
0.050
0.075
0.100
0.125
0.150
0.175

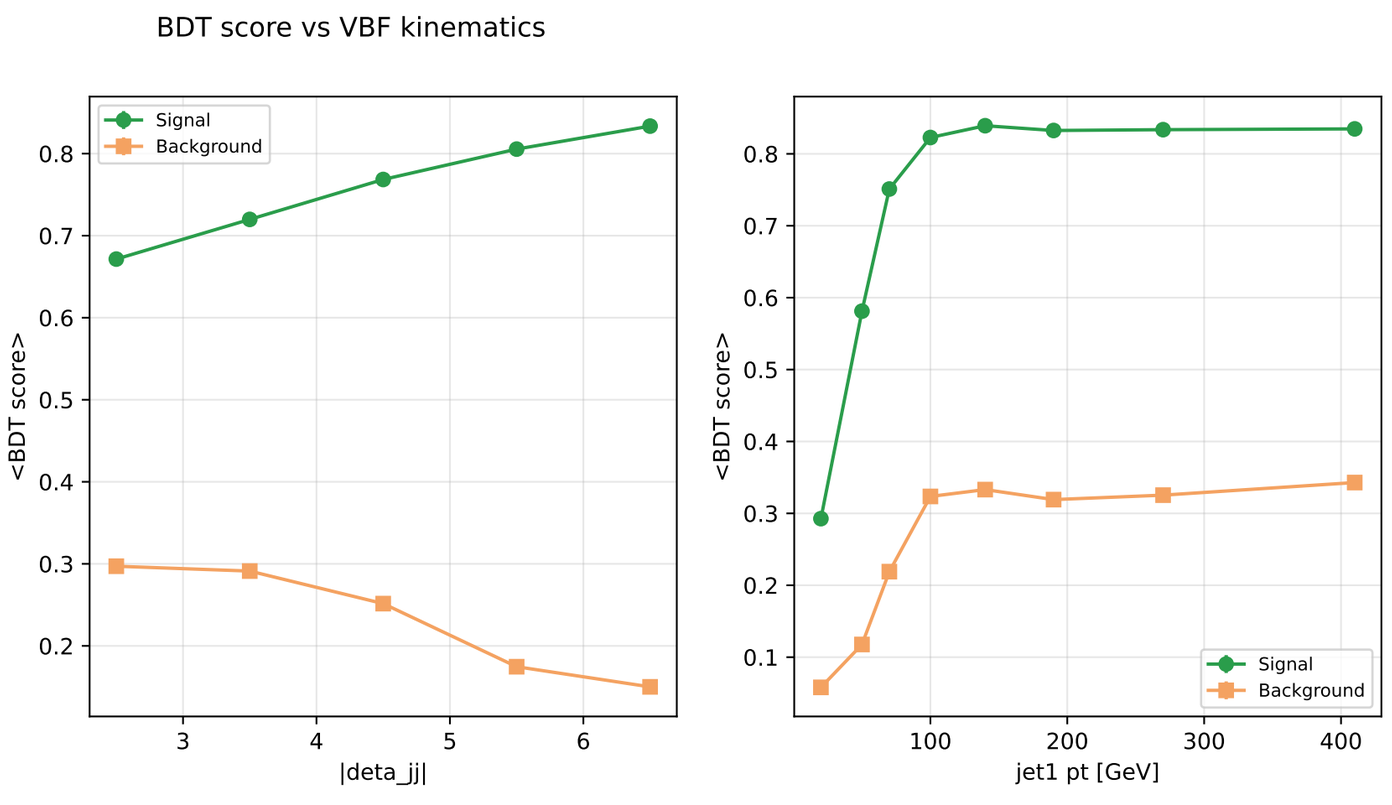
BDT score vs VBF kinematics
Signal
Background
<BDT score>
|deta_jj|
jet1 pt [GeV]

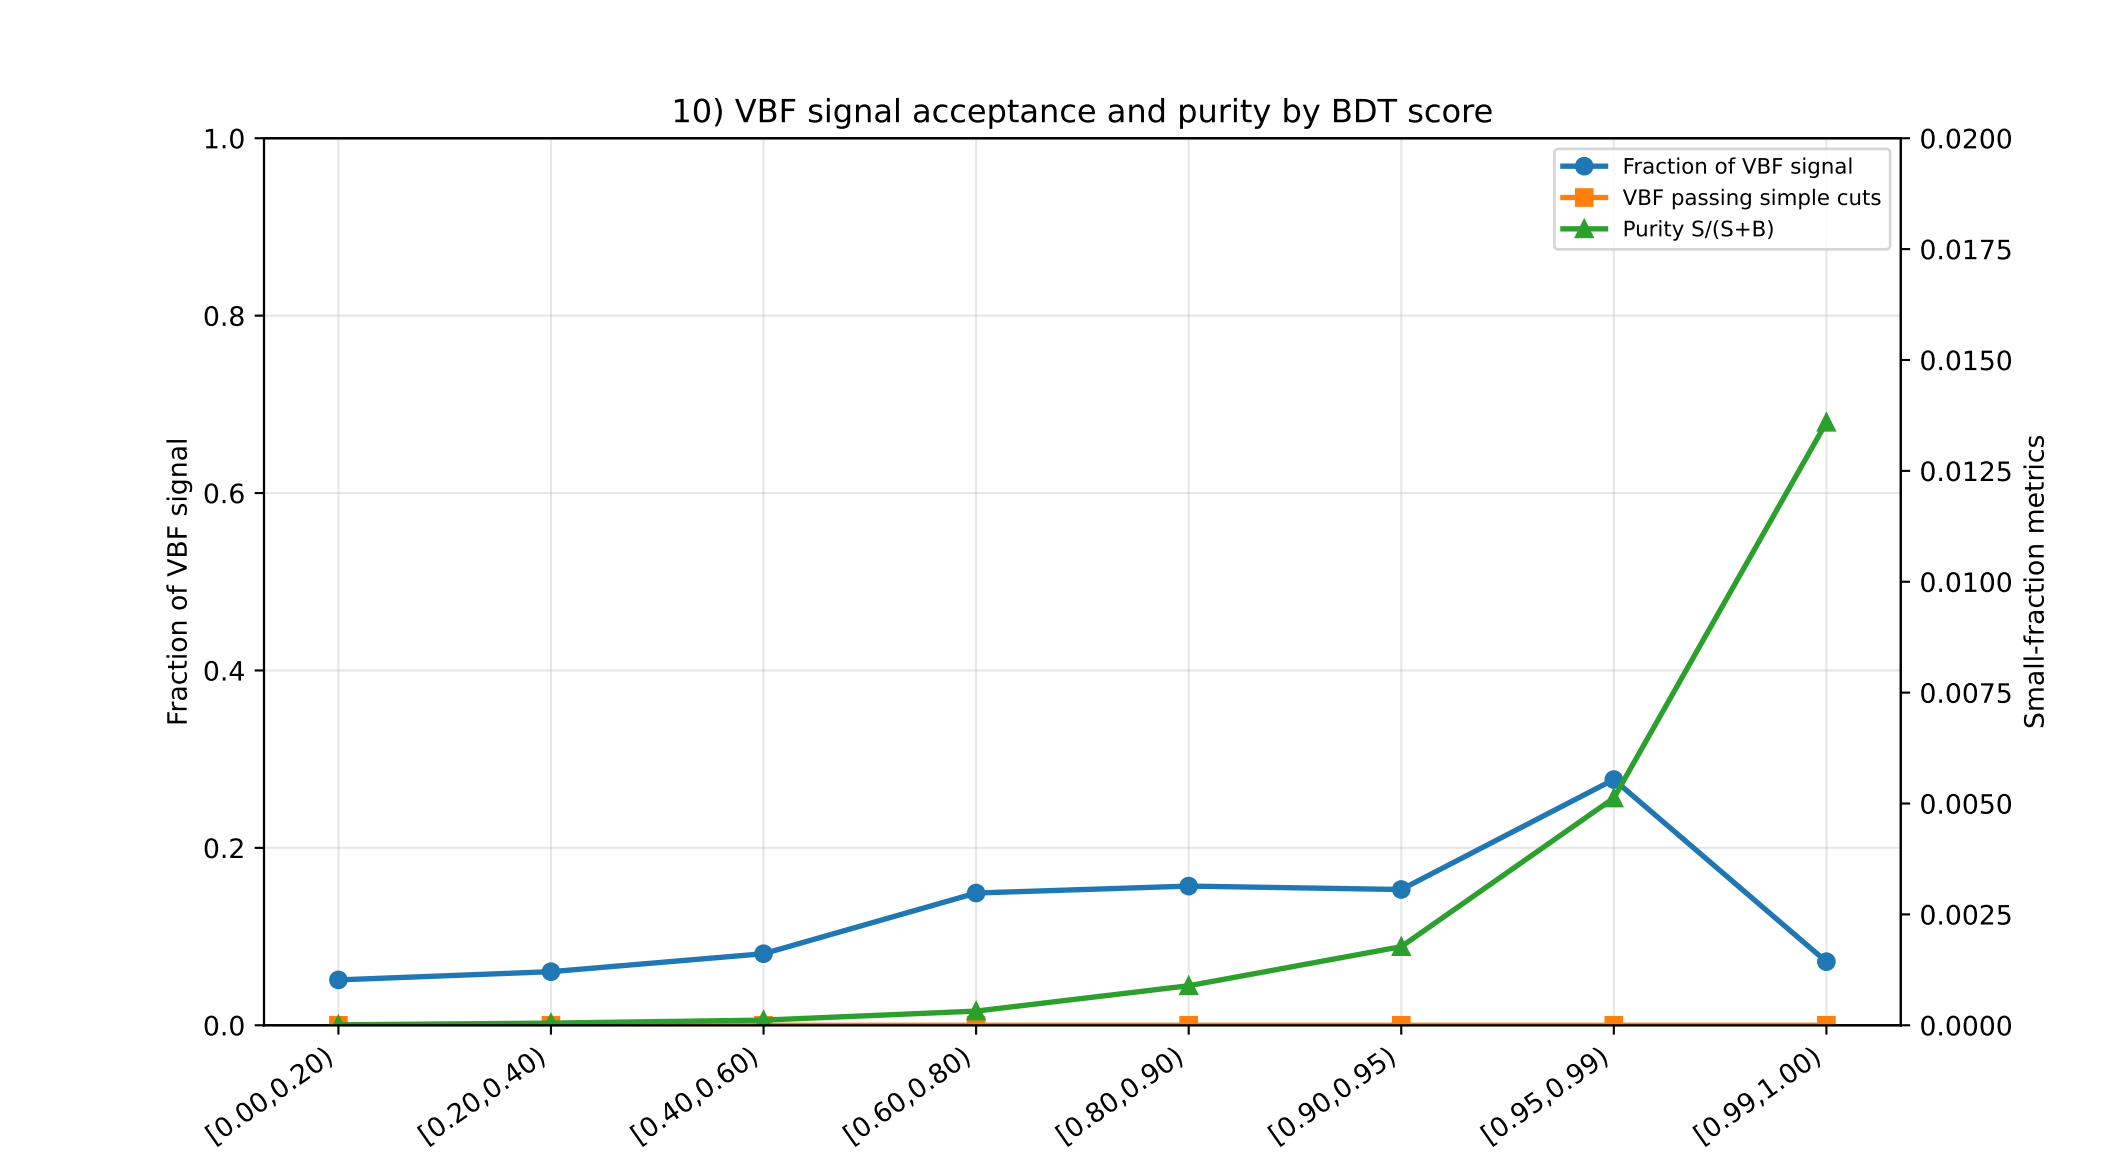
10) VBF signal acceptance and purity by BDT score
Fraction of VBF signal
VBF passing simple cuts
Purity S/(S+B)
Fraction of VBF signal
Small-fraction metrics
1.0
0.8
0.6
0.4
0.2
0.0
0.0200
0.0175
0.0150
0.0125
0.0100
0.0075
0.0050
0.0025
0.0000
[0.00,0.20)
[0.20,0.40)
[0.40,0.60)
[0.60,0.80)
[0.80,0.90)
[0.90,0.95)
[0.95,0.99)
[0.99,1.00)

Validation Summary

Era: 12022
Inputs: data_files=1 mc_groups=7
Signal groups: SIGNAL
VBF groups: SIGNAL
SR weighted yields: S=2.297, B=17721.637
KS profiles: Run2-loose: p>=0.01, D<=0.15; Run2-nominal: p>=0.05, D<=0.1; Run2-tight: p>=0.1, D<=0.07
Feature importance source: src/drivers/9_TMVA/Outputs/Training/12022/12022_featureimportance_DY.txt
Optimized categories: n=10, Z_Asimov=0.0795
KS(signal train-vs-valid): D=0.0062, p=0.3885
KS(bkg train-vs-valid): D=0.0118, p=0.000279
KS profile checks (Signal): Run2-loose=PASS, Run2-nominal=PASS, Run2-tight=PASS
KS profile checks (Background): Run2-loose=FAIL, Run2-nominal=FAIL, Run2-tight=FAIL
Corr(score, njets) signal=-0.131, background=0.031
Highest BDT-bin purity=0.014