



Spring Data JPA Transactions

- Spring Data JPA by default supports implicit transactions. Meaning repository methods will create a transaction by default, if there is not an active transaction.
- Spring Data JPA has two types of implicit transactions:
 - Read operations are done in a read only context
 - Updates and deletes are done with the default transactional context
- Use read only with caution, dirty checks are skipped, making more performant
 - If object from read only context is updated and saved, you may encounter issues

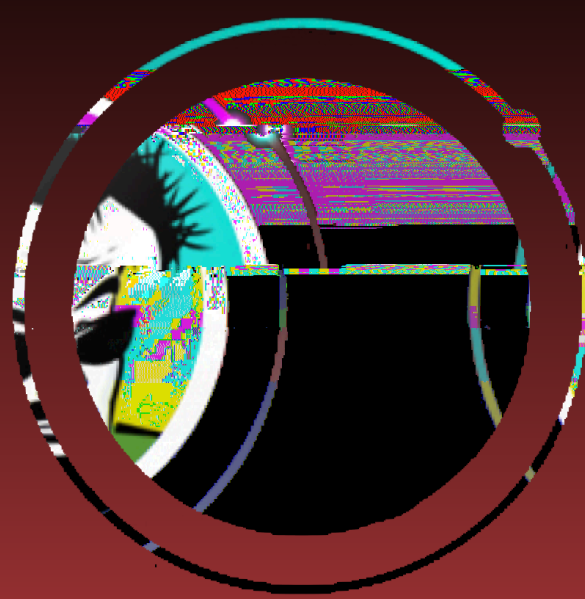


S i g B T e i g T a a c i

- Spring Boot by default will create a transaction for your tests and roll it back
- The Spring Data JPA Implicit transactions are NOT used in the test context
 - Implicit transactions are only used outside of a transactional context
- If you have a method under test with one or more repository method calls, you may see different results when run outside of the test context
 - Typically a detached entity error from accessing lazy load properties outside the Hibernate context

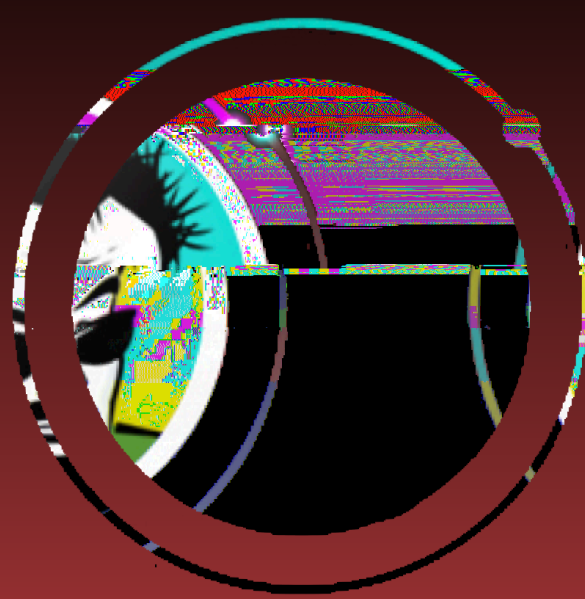


Declared in the @Transactional Annotation

- Spring Framework provides an @Transactional annotation in the package “org.springframework.transaction.annotation”
- JEE also provides a @Transactional annotation in the package “javax.transaction”
- Spring will support either option
 - Spring 4.x might have some compatibility issues
- Recommended to use Spring Framework’s version of @Transactional
 - More versatile and Spring specific than JEE’s @Transactional

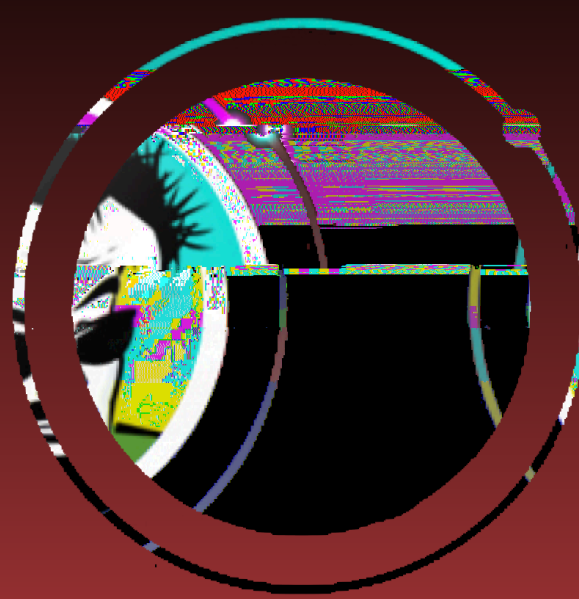

Spring @Transactional Annotation


- Transactional Annotation Attributes:
 - **value / name** - the name of the Transaction Manager to use
 - **label** - String to describe a transaction
 - **Propagation** - The Transaction Propagation Type
 - **Isolation** - Transaction Isolation Level
 - **timeout** - Timeout for Transaction to complete
 - **readOnly** - is read only?

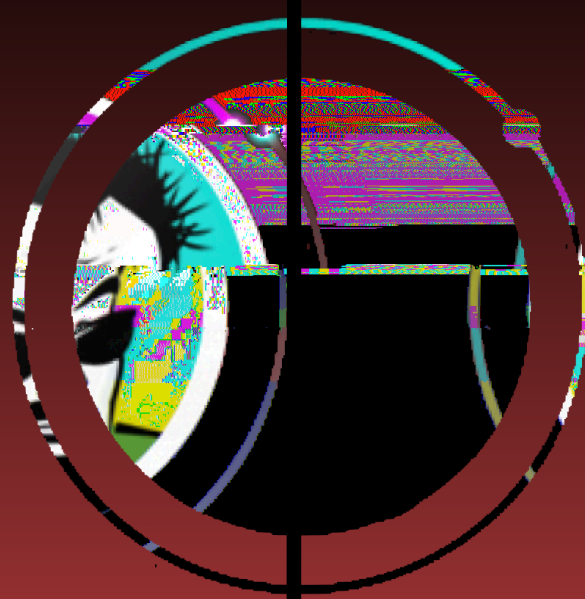

S i g @T a c i a l A a i - C


- Transactional Annotation Attributes:

- **lbackF / lbackf Cla Name** - Exceptions to rollback for
- **N R lbackF / R lbackf Cla Name** - Exceptions to NOT rollback for

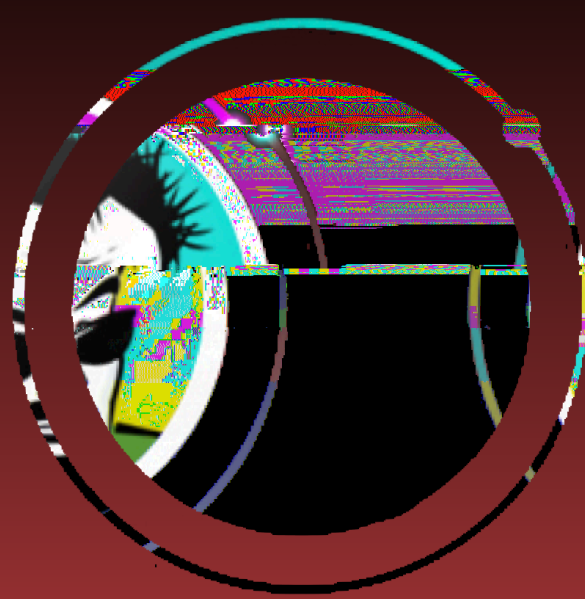


@Transactional - Transaction Manager

- Spring Boot will auto-configure an instance of a Transaction Manager depending on your dependencies
- Spring Framework provides an interface called PlatformTransactionManager
 - Implementations available for JDBC, JTA (JEE), Hibernate, etc
 - Spring Boot auto-configures the appropriate implementation
- Auto-Configured instance named 'transactionManager'

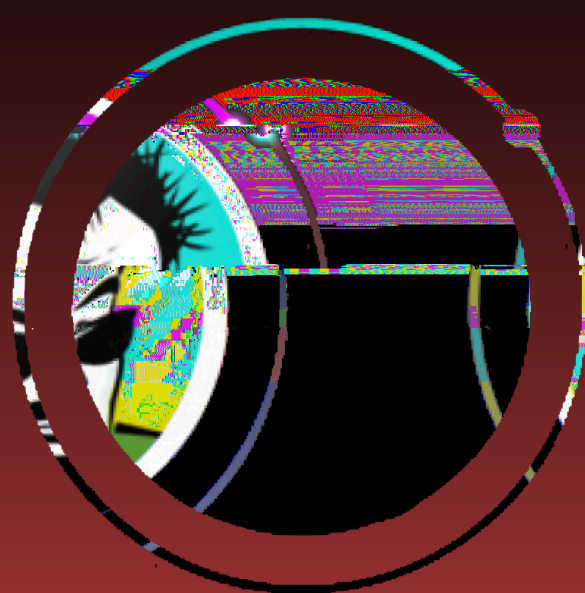


@Transactional - Transactional Programming

- **REQUIRED** - (Default) - use existing, or create new transaction
- **SUPPORTS** - Use existing, or execute non-transactionally if none exists
- **MANDATORY** - Support current, throw exception if none exists
- **REQUIRES_NEW** - Create new, suspend current
- **NOT_SUPPORTED** - Execute non-transactionally, suspend current transaction if exists
- **NEVER** - Execute non-transactionally, throw exception if transaction exists
- **NESTED** - Use nested transaction if transaction exists, create if not

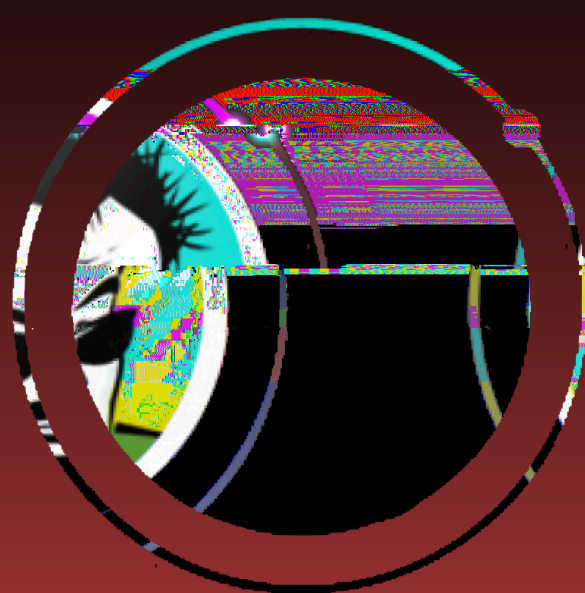

@Transactional - Transactional Isolation Level


- **DEFAULT** - (Default) Use level of JDBC connection
- **READ_UNCOMMITTED** - Allows for dirty, no-repeatable reads
- **READ_COMMITTED** - Prevent dirty reads, prevents from reading rows with uncommitted changes
- **REPEATABLE_READ** - Prevent dirty reads and non-repeatable reads
- **SERIALIZABLE** - prevent all dirty reads, similar to REPEATABLE_READ, and performs second read to verify

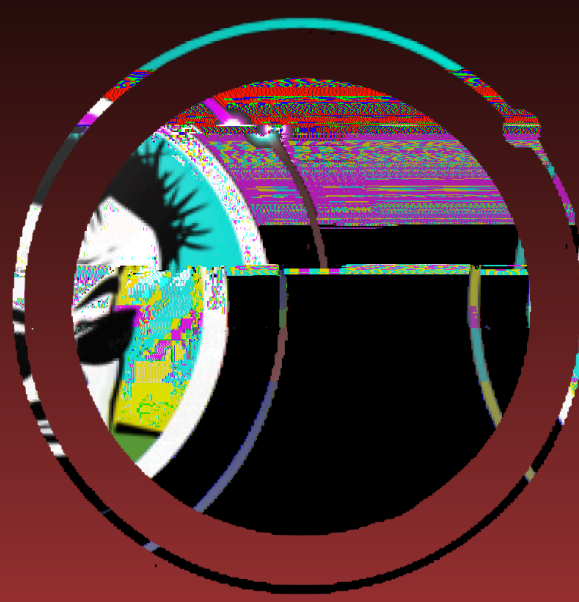

@Transactional - Transaction Time


- Default value is -1, which is to use the underlying implementation
- Spring Boot does not override this
- Unless set specifically at the connection level, defaults to the platform setting
 - For MySQL this is 8 hours



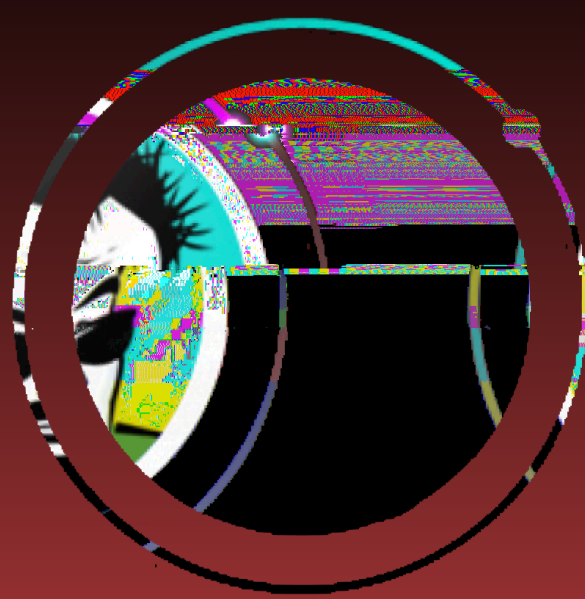


@Transactional - Read Only

- By default the readOnly property is set to false
 - Spring Data JPA for implicate transactions of read methods will set this to true
- Using the readOnly property to true does allow for Hibernate to make some efficiency optimizations
 - This is NOT guaranteed
- DO NOT USE if you expect to update and save entities fetched

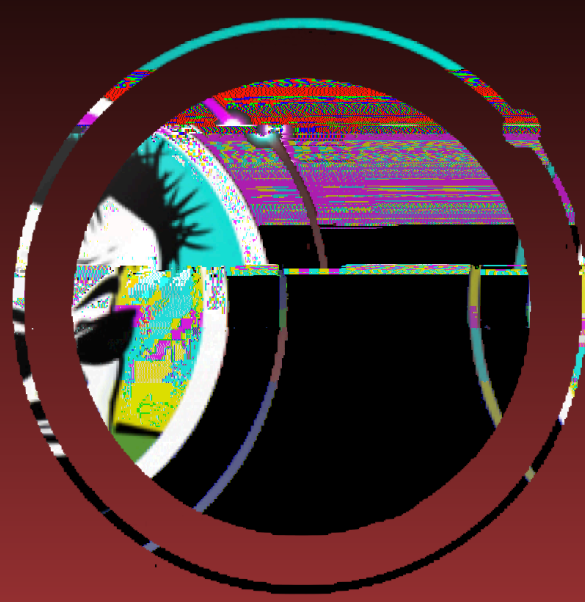

@Transactional - Rollback / Non-Rollback


- By default unhandled runtime exceptions will be rollback
- Typically default is fine for most situations
- Can be useful where you wish to rollback a child transaction, but not the whole transaction

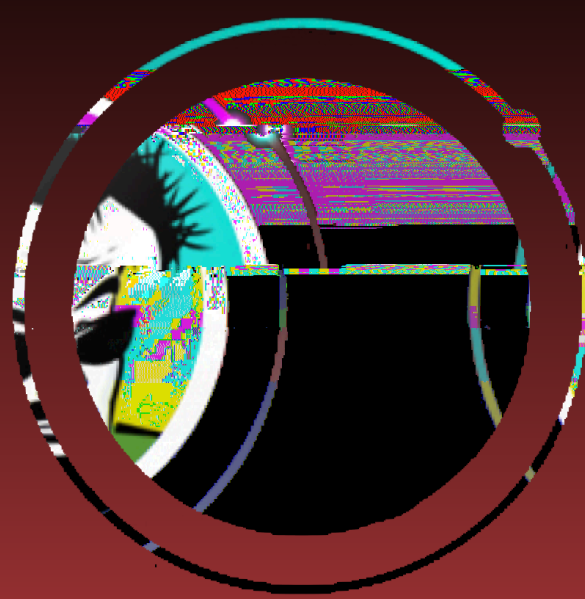

Using @Transactional at Repository Level

- Spring Data JPA Repository methods can be overridden and customized at the repository level

```
public interface OrderHeaderRepository extends JpaRepository<OrderHeader, Long> {  
  
    new *  
    @Override  
    @Transactional(readonly = false)  
    Optional<OrderHeader> findById(Long aLong);  
}
```

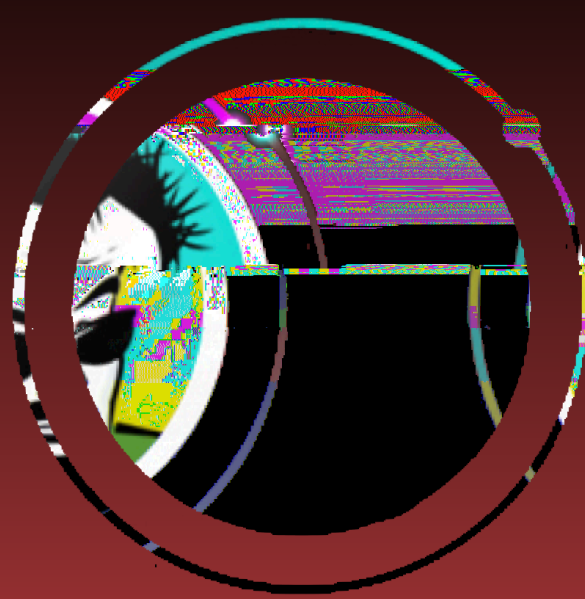

Implicit Transaction


```
1 usage
}
public void doSomething(){
    Customer customer = getCustomerMethod1(); //out of scope
    updateCustomerMethod2(customer); //out of scope
}

1 usage
private Customer getCustomerMethod1(){
    return customerRepository.getById(1l); //Implicit Transaction
}

1 usage
private void updateCustomerMethod2(Customer customer){
    customer.setCustomerName("new Name"); //Implicit transaction
}
```



2022

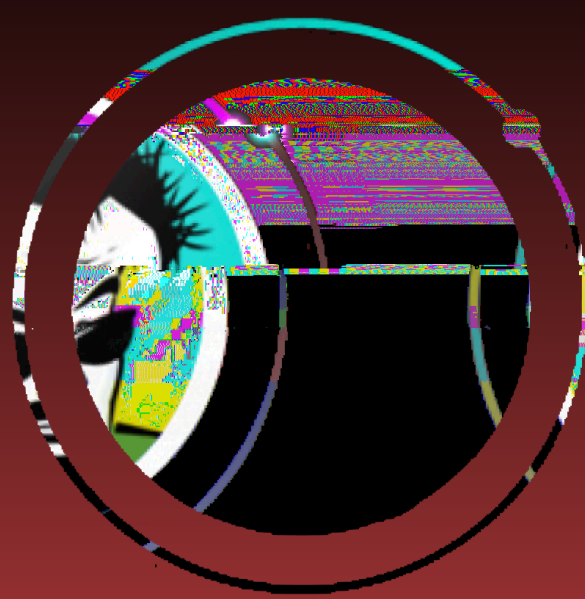

D U e P i a e M e h d

```
@Transactional
```

```
private Customer getCustomerMethod1() {
```

Methods annotated with '@Transactional' must be overridable

Make 'Bootstrap.getCustomerMethod1' not private ↵ ↵ ↵

More actions... ↵ ↵

```
@Transactional
```

```
@NotNull ↗
```


```
private Customer getCustomerMethod1()
```

guru.springframework.orderservice.bootstrap.Bootstrap

sdjpa-order-service



2022

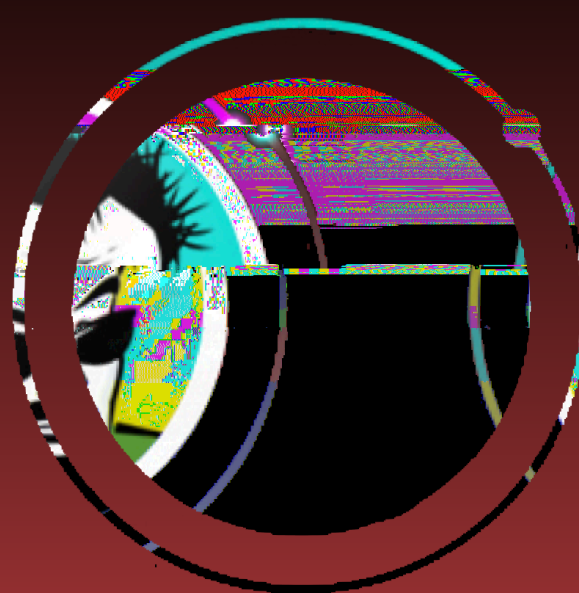


Declared Transaction & Scope

```
public void doSomething(){
    ... Customer customer = getCustomerMethod1();
    ... updateCustomerMethod2(customer);
}
1 usage

@Transactional // 1st Declared Transaction
public Customer getCustomerMethod1() {
    ... return customerRepository.findById(1L);
}
1 usage

@Transactional // 2nd Declared Transaction
public void updateCustomerMethod2(Customer customer) {
    ... customer.setCustomerName("new Name");
    ... customerRepository.save(customer);
}
```

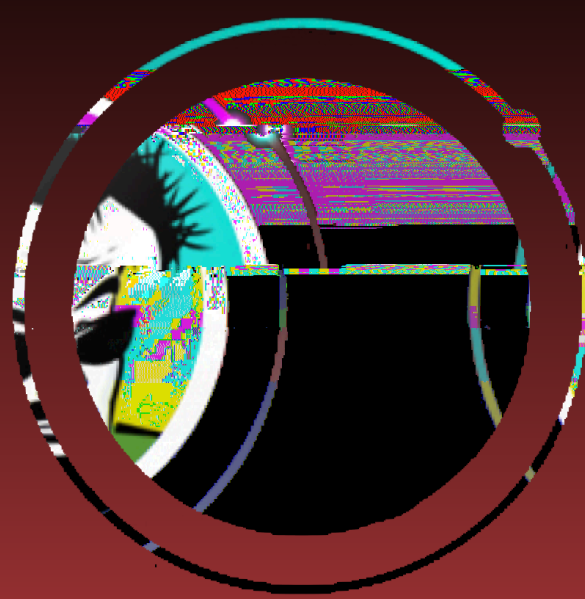



The i T a ac i

```
@Transactional // 1st Declared Transaction
public void doSomething(){
    ... Customer customer = getCustomerMethod1();
    ... updateCustomerMethod2(customer);
}
1 usage
@Transactional // uses parent transaction
public Customer getCustomerMethod1(){
    ... return customerRepository.findById(1l);
}
1 usage
@Transactional // uses parent transaction
public void updateCustomerMethod2(Customer customer){
    ... customer.setCustomerName("new Name");
    ... customerRepository.save(customer);
}
```

```
@Transactional // 1st Declared Transaction
public void doSomething(){
    ... Customer customer = getCustomerMethod1();
    ... updateCustomerMethod2(customer);
}
1 usage
public Customer getCustomerMethod1(){
    ... return customerRepository.findById(1l);
}
1 usage
public void updateCustomerMethod2(Customer customer){
    ... customer.setCustomerName("new Name");
    ... customerRepository.save(customer);
}
```



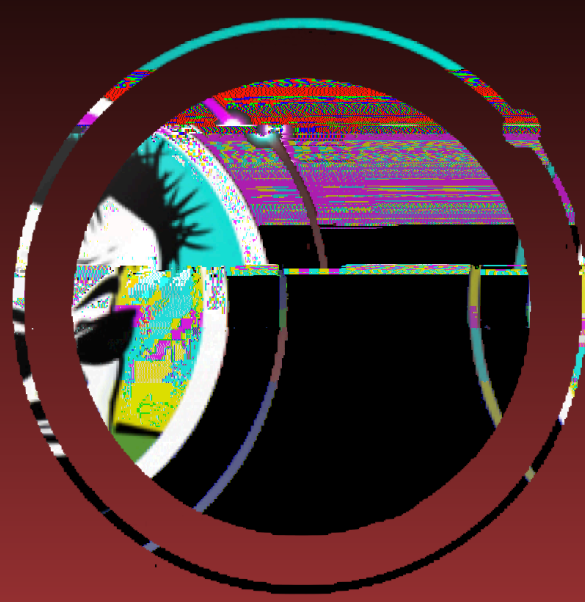

Child Transaction

```
@Transactional // 1st Declared Transaction
public void doSomething() {
    // ...
    Customer customer = getCustomerMethod1();
    // ...
    updateCustomerMethod2(customer);
    // ...
}
1 usage
@Transactional(propagation = Propagation.REQUIRED)
public Customer getCustomerMethod1() { // uses parent transaction
    // ...
    return customerRepository.getById(1L);
    // ...
}
1 usage
on @Transactional(propagation = Propagation.REQUIRES_NEW) //Creates new child transaction
public void updateCustomerMethod2(Customer customer) {
    // ...
    customer.setCustomerName("new Name");
    // ...
    customerRepository.save(customer);
    // ...
}
```



2022

