


Hibernate & Spring Data JPA


Beginner to Guru

Hibernate Interceptors and Lists

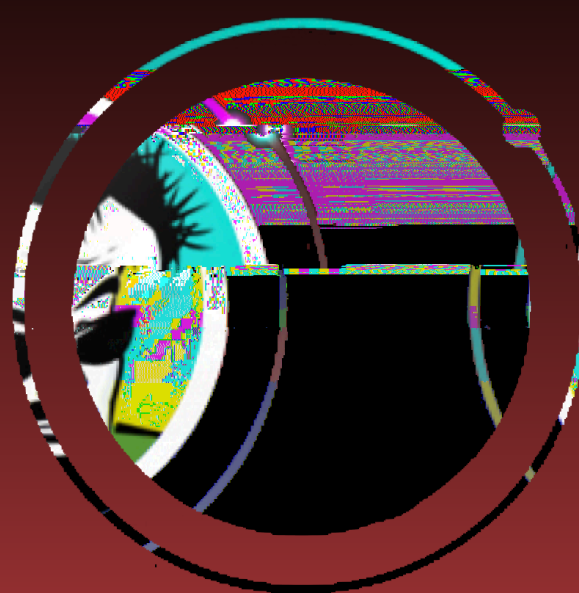


Hibernate Interceptors and Listeners

- Interceptors and Listeners can be used together
 - Significant overlap in functionality
- Both will be applied to all entities
- Listeners should be considered stateless
 - Shared between requests, and should NOT save state

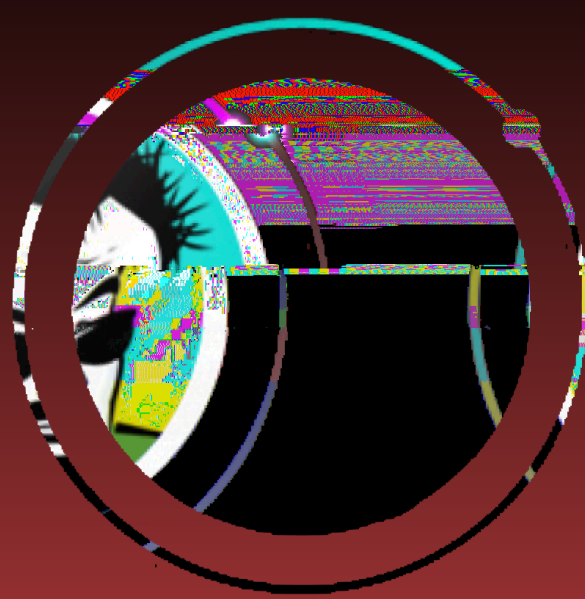


Hibernate Interceptors

- Hibernate Interceptors are callbacks registered in Hibernate's internal operations
 - Can be session scoped or session factory scoped
 - Can be used for security, auditing, or to alter data
- Implemented via:
 - `org.hibernate.Interceptor` interface
 - `org.hibernate.EmptyInterceptor` class
 - Deprecated in Hibernate 6.x - migrating to default interface methods

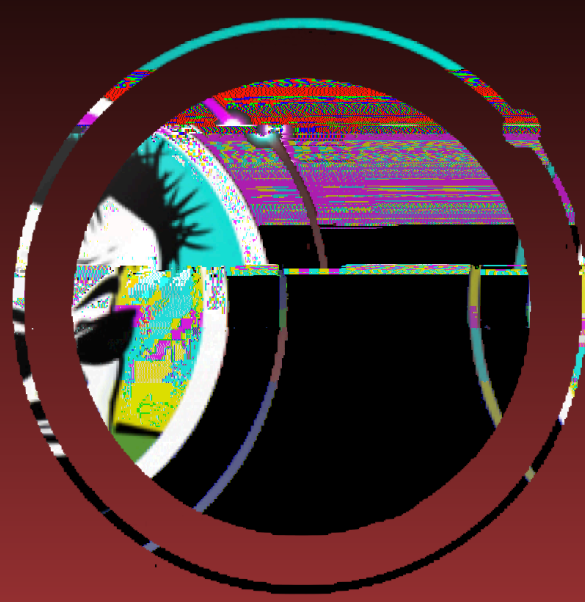

Hibernate Listeners


- Hibernate has an event system
- Hibernate event listeners subscribe to Hibernate Events
- Hibernate Events are defined by `org.hibernate.event.spi.EventType`
 - Roughly 36 Event types defined - `SAVE`, `PRE_INSERT`, `POST_INSERT`, etc
- Each type defines a default listener, which can be extended to define a custom listener
- Once created, the customer Listener must be registered with the `Hibernate SessionFactory`

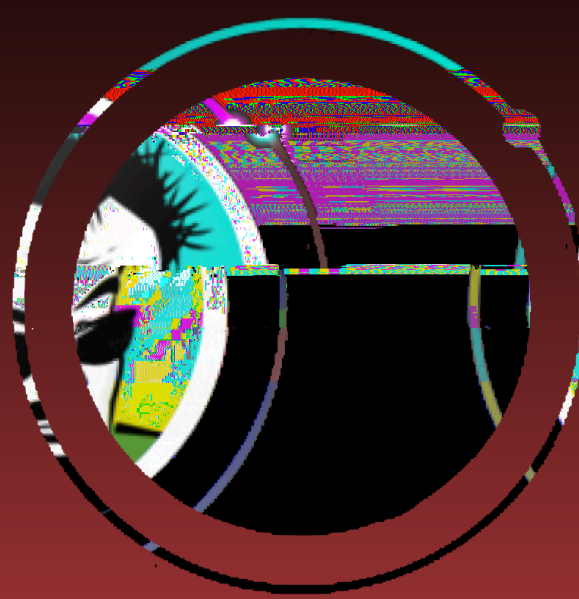

JPA Callbacks

- JPA defines 7 Callbacks via annotations
- Callbacks are entity specific and can be:
 - On an entity method
 - Or on a Entity Listener Class
 - Entity Listeners must:
 - Be stateless and have no-arg constructor
 - Methods must return void
 - Do not use Entity Manager



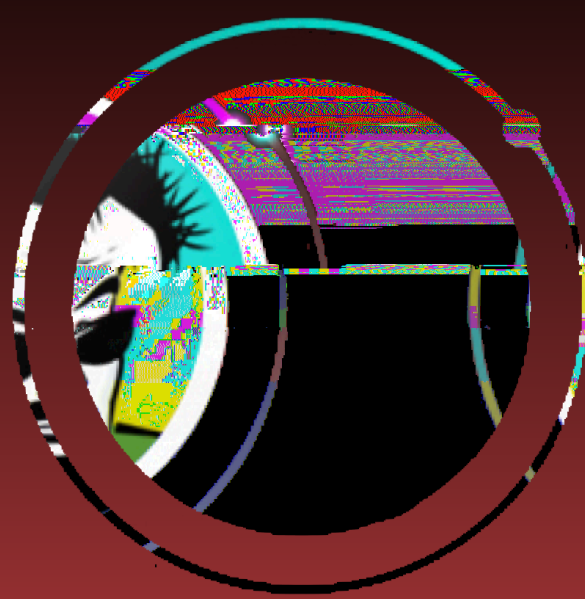

JPA Callbacks

- **@PrePersist** - Before persist operation
- **@PreRemove** - Before remove operation
- **@PostPersist** - After persist operation is completed
- **@PostRemove** - After remove operation is completed
- **@PreUpdate** - Before update operation
- **@PostUpdate** - After update operation
- **@PostLoad** - After entity is loaded or refreshed

