


Git bisect


Examinando o arquivo **example.md**, encontramos um bug: o conteúdo repete o **3**. Pense nisso como uma funcionalidade “quebrada”.

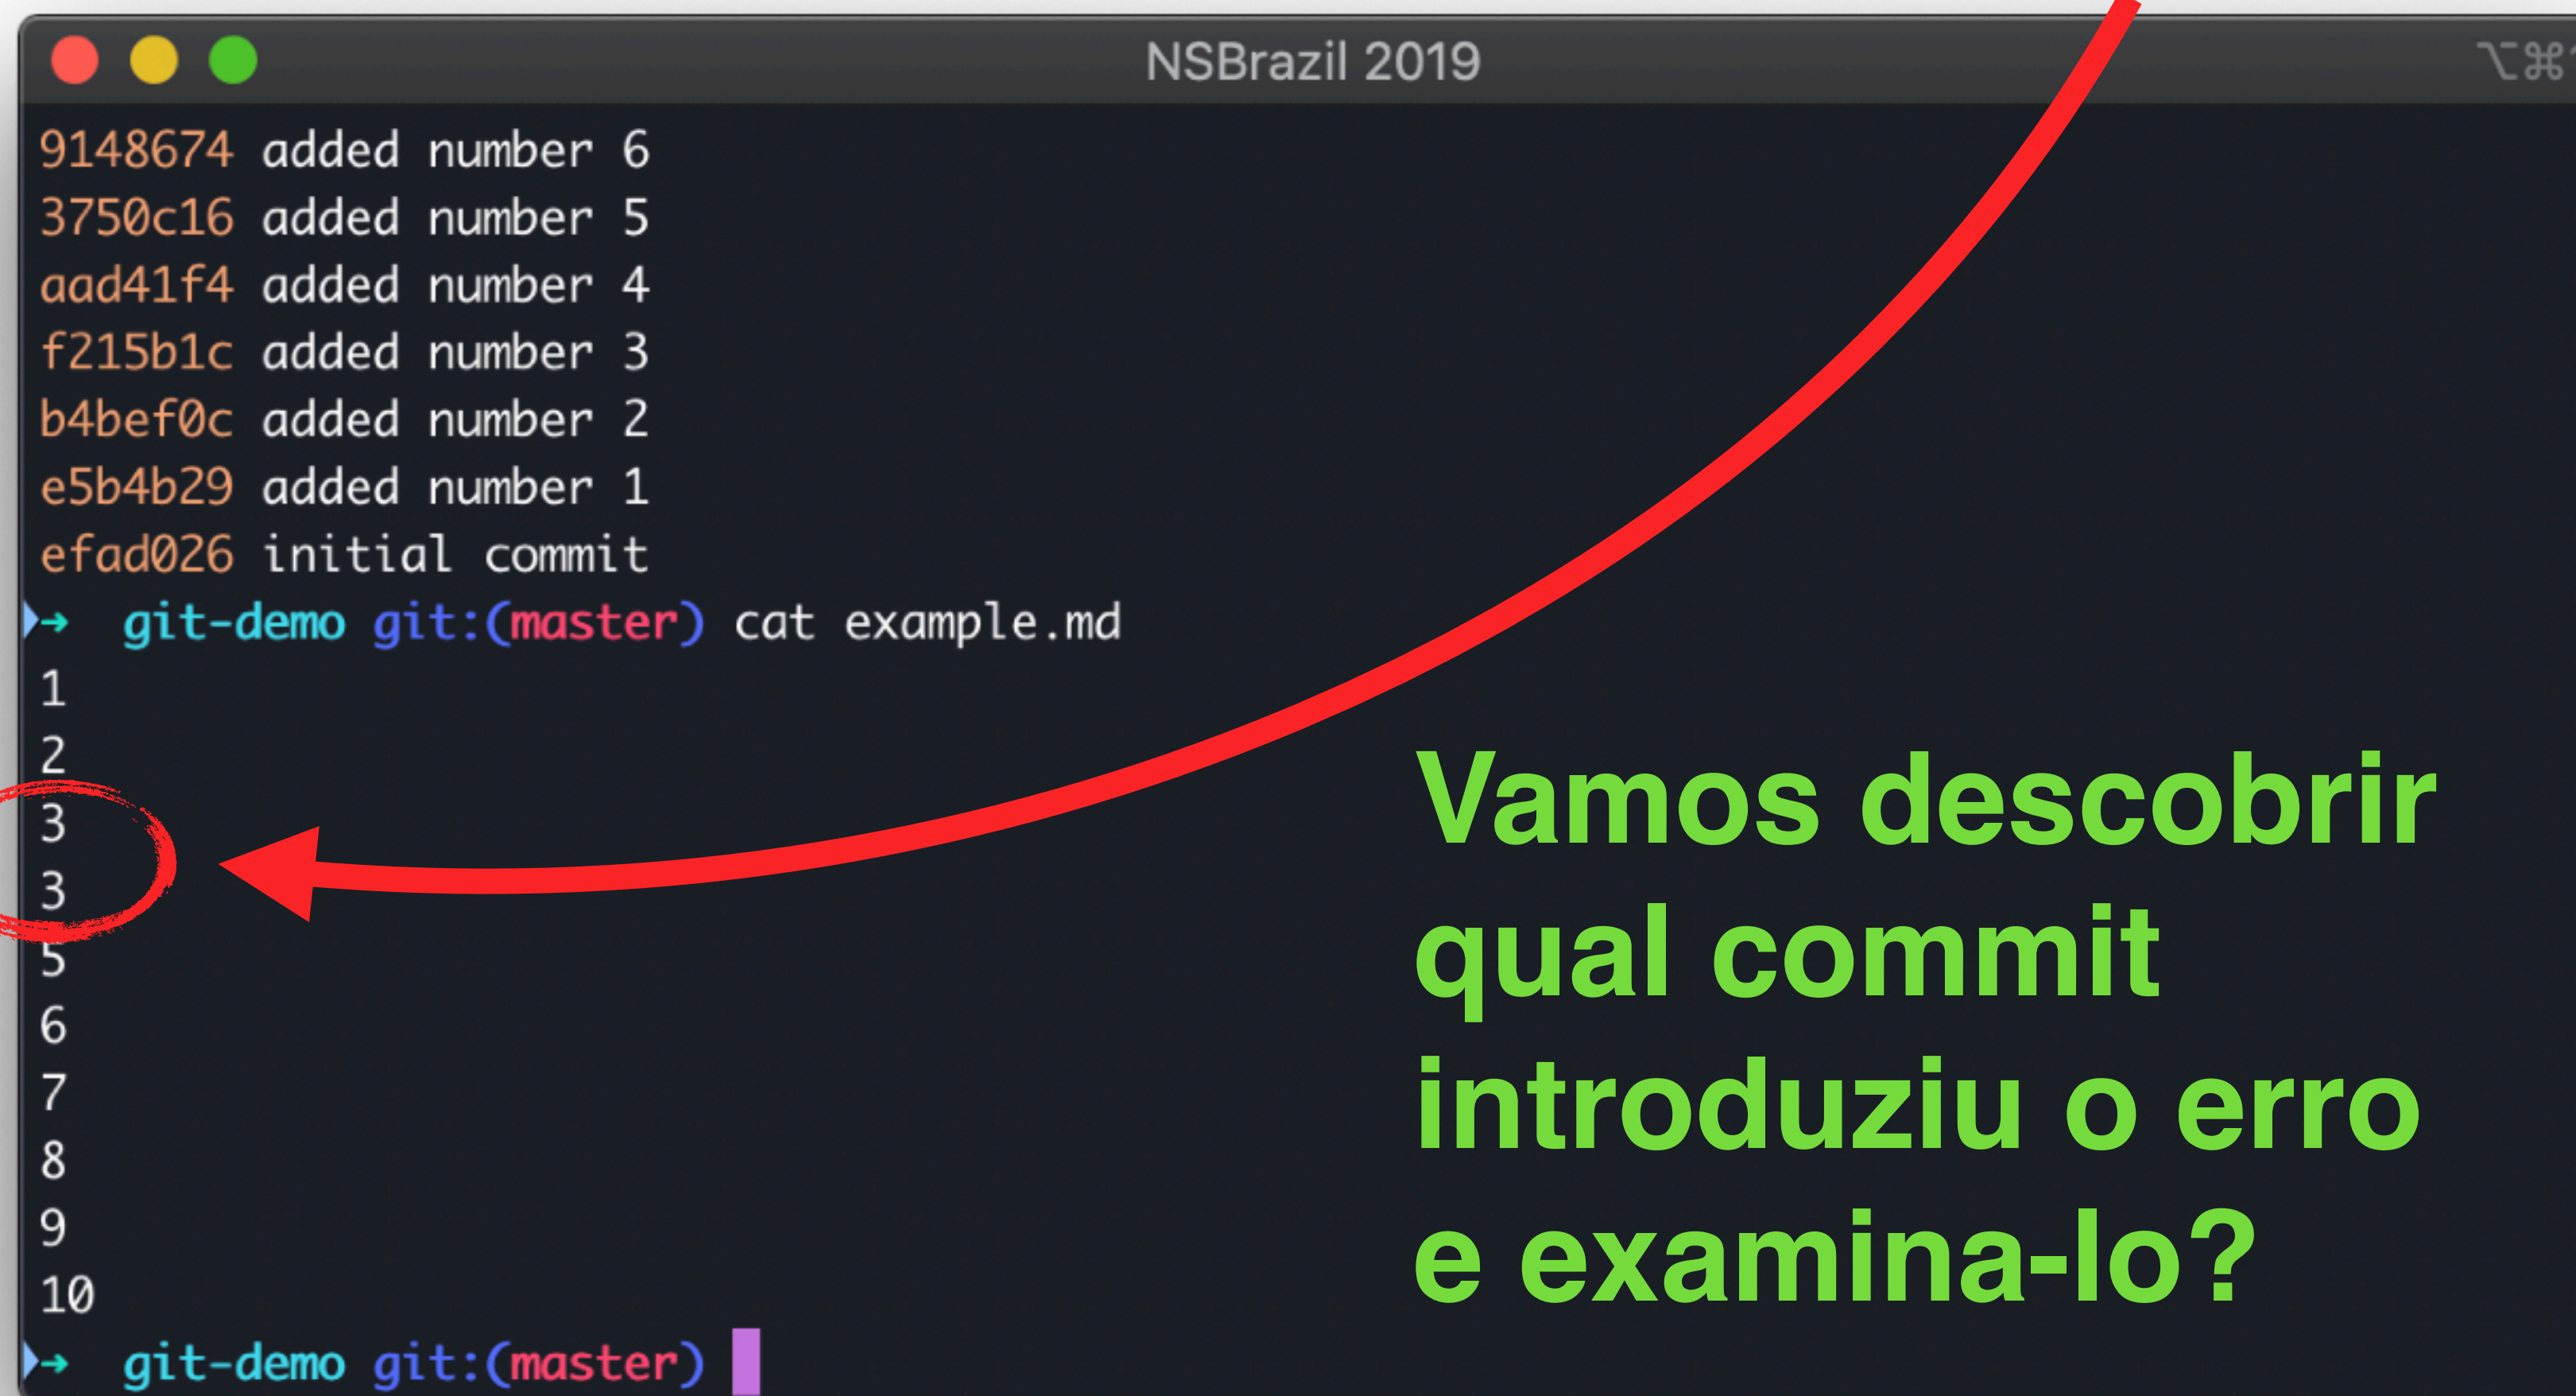

```
9148674 added number 6
3750c16 added number 5
aad41f4 added number 4
f215b1c added number 3
b4bef0c added number 2
e5b4b29 added number 1
efad026 initial commit
git-demo git:(master) cat example.md
1
2
3
3
5
6
7
8
9
10
git-demo git:(master)
```

Vamos descobrir
qual commit
introduziu o erro
e examina-lo?

Git bisect

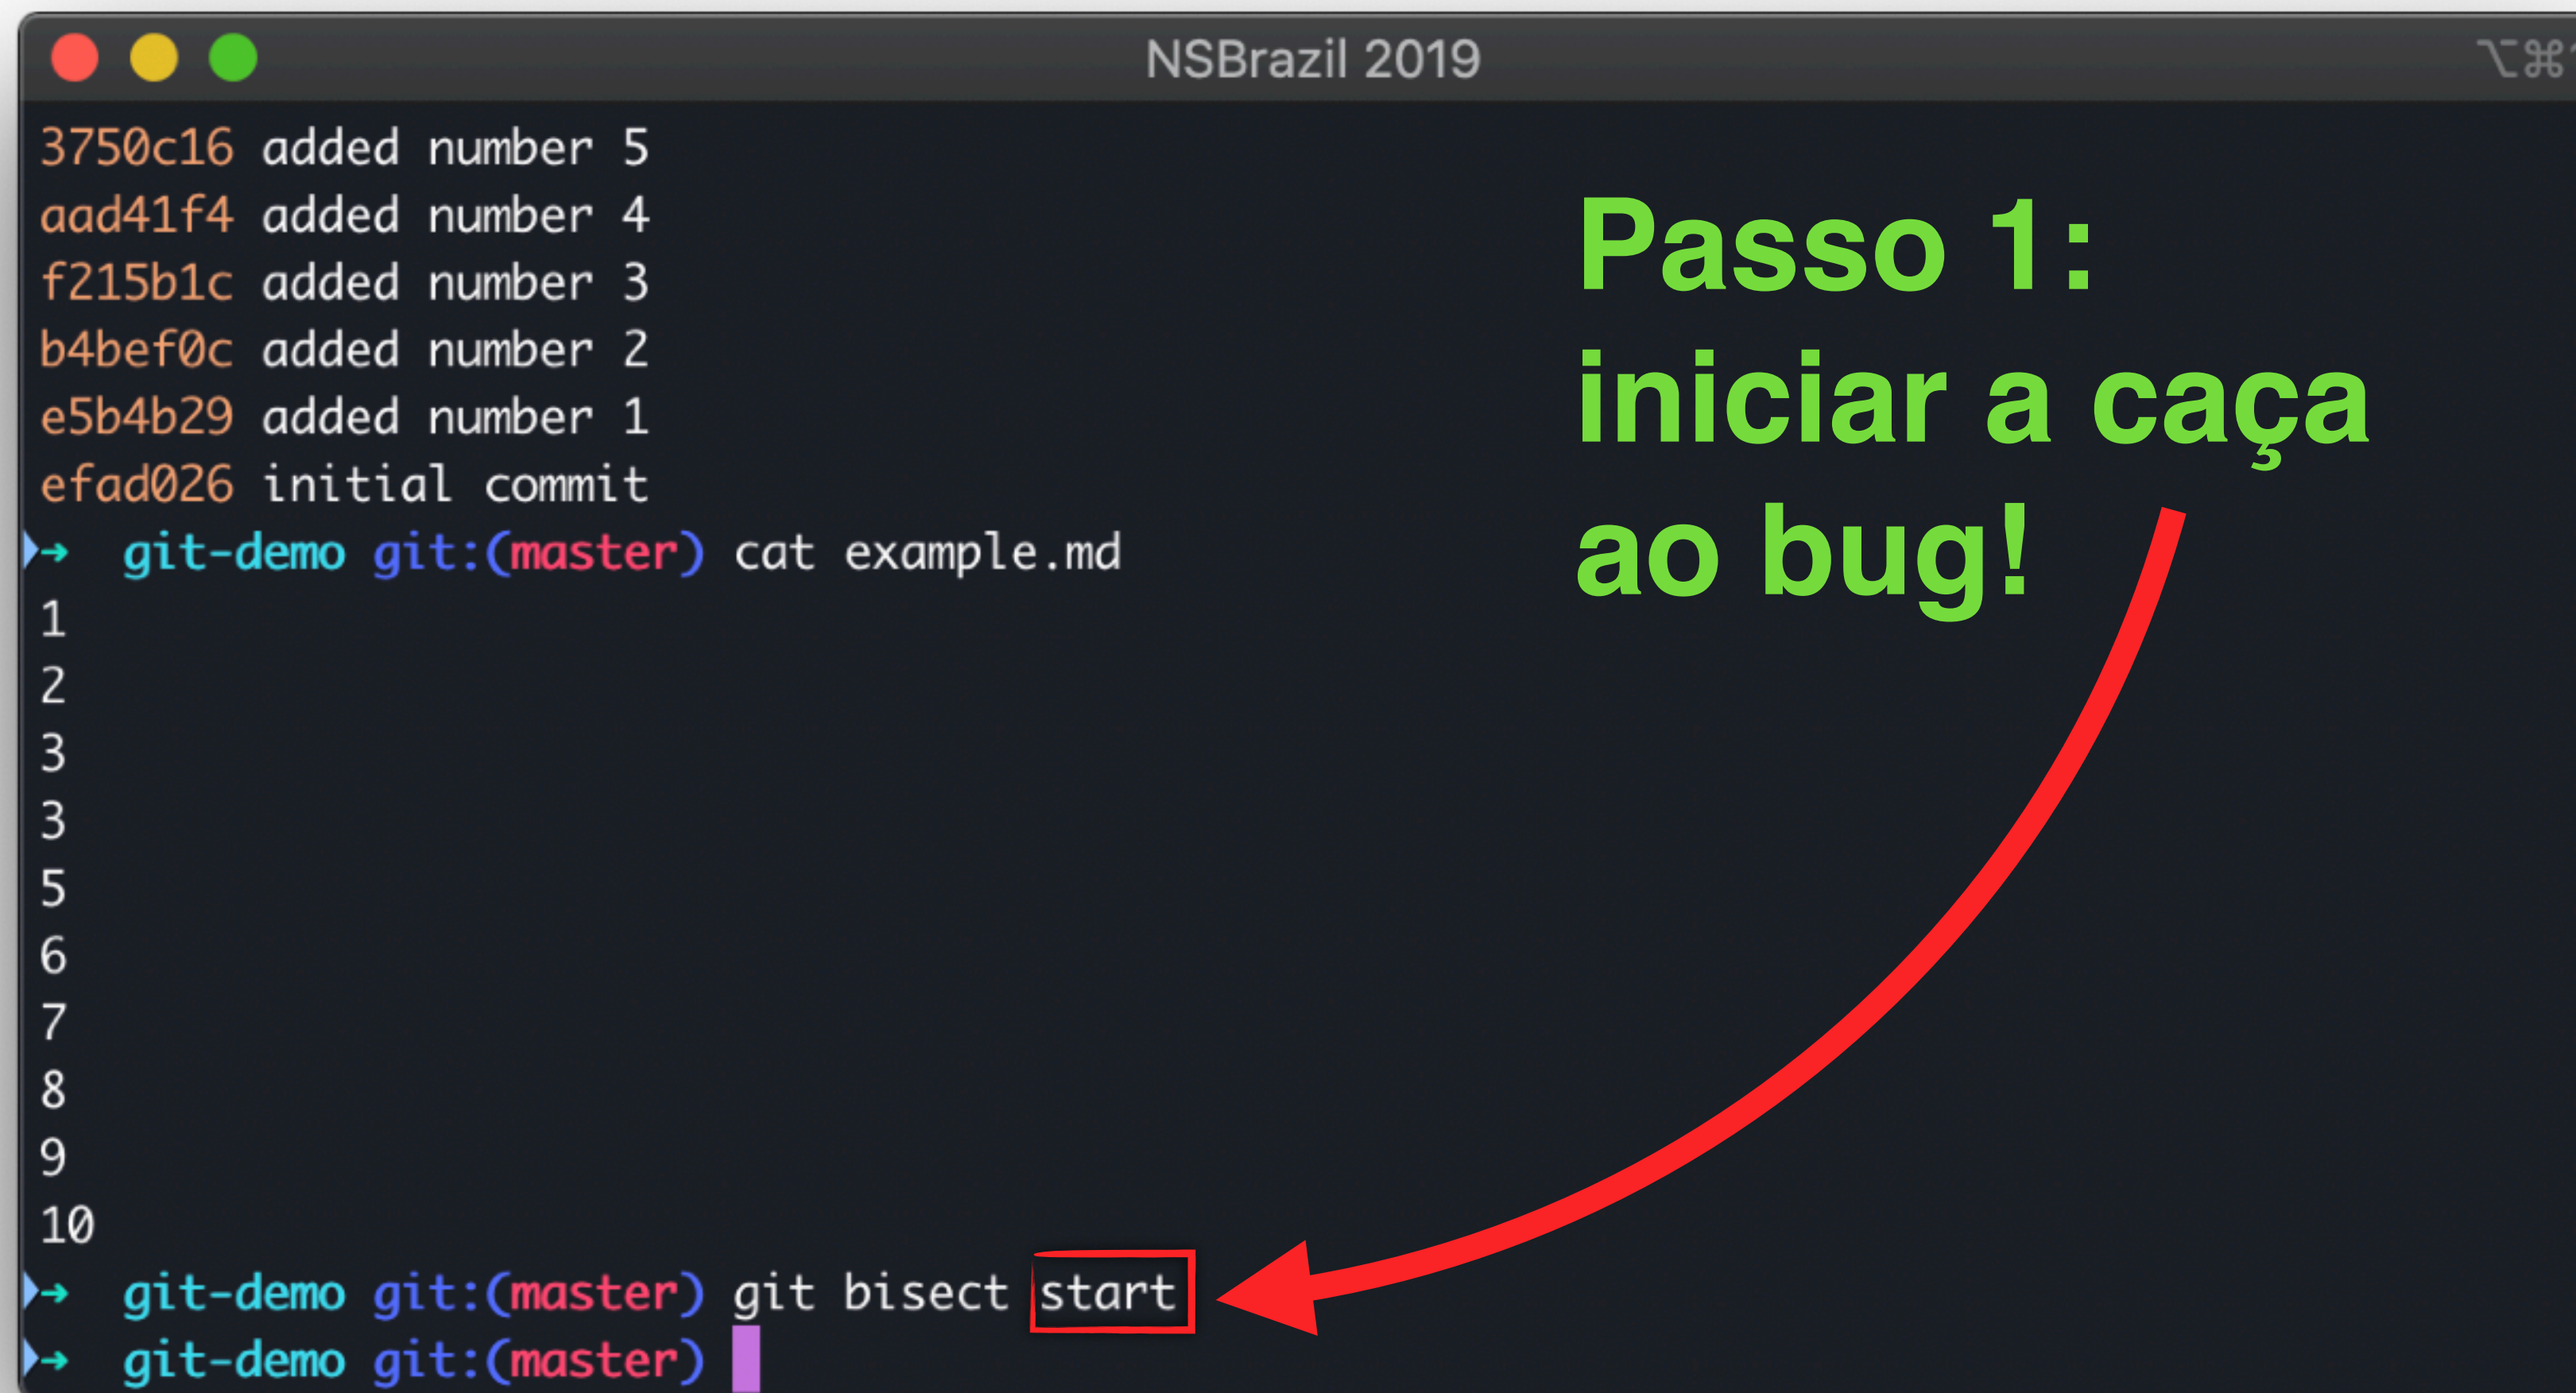

A terminal window titled "NSBrazil 2019" with a macOS-style title bar (red, yellow, green buttons). The terminal shows a list of Git commits and the execution of the `git bisect start` command. A red arrow points from the text "Passo 1: iniciar a caça ao bug!" to the `start` argument in the command.

```
3750c16 added number 5
aad41f4 added number 4
f215b1c added number 3
b4bef0c added number 2
e5b4b29 added number 1
efad026 initial commit
git-demo git:(master) cat example.md
1
2
3
3
5
6
7
8
9
10
git-demo git:(master) git bisect start
git-demo git:(master) 
```

Passo 1:
iniciar a caça
ao bug!